

1. Remove the mech from the underside of the seat using the 4 bolts.

2. Place the seat slide on a flat surface and place your hands as shown in the 1st image below.

- Push the lever down on the right to allow the plate to move.




- Pull back the top plate and release the lever once this is at the furthest back position to reveal the four fixing locations.



3.

- Ensure the seat has the front facing as shown below.
- Place the seat slide on the seat as shown below aligning the 4 whole with the seat fixing locations. **(ensure you don't lean or press the lever as this will cause this to spring back).**
- Fit the 4 bolts you removed from the mech in part 1 to the four fixings in the seat slide.

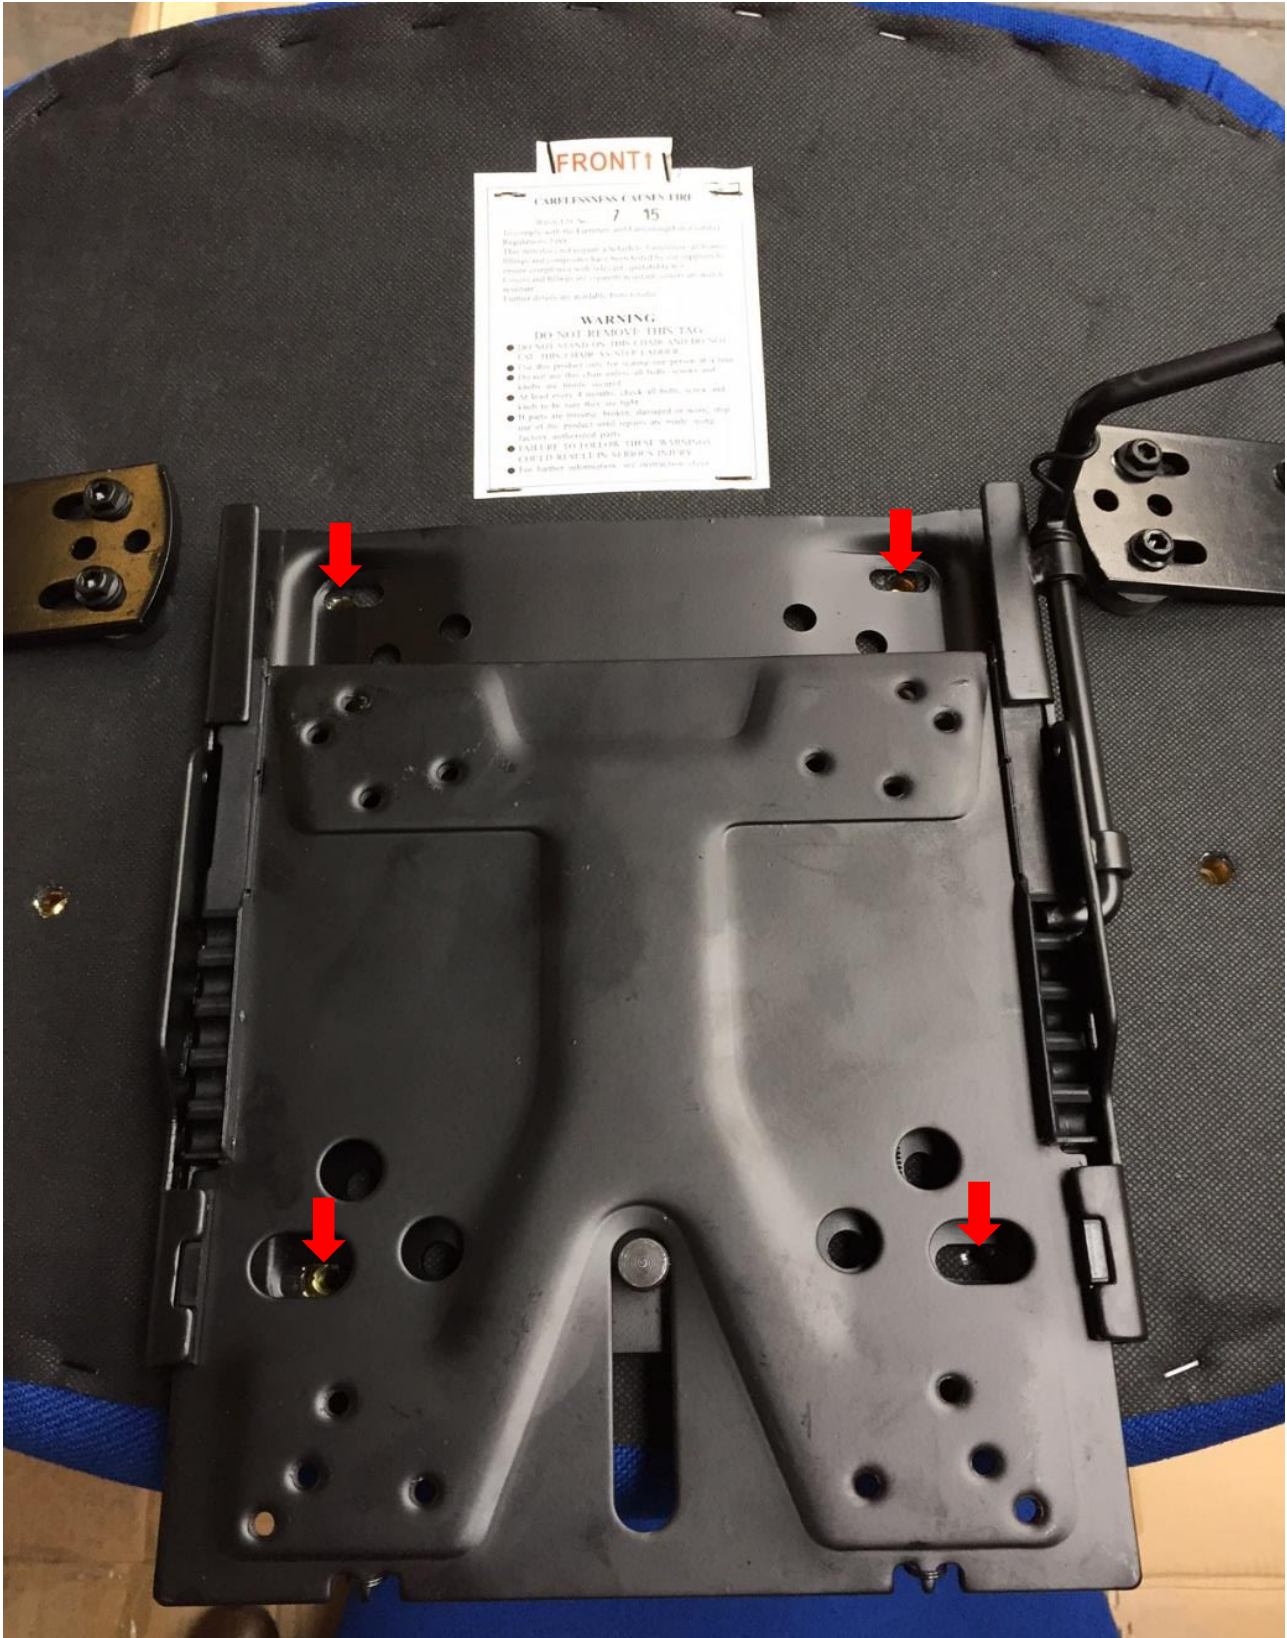

4.

- Release the seat slide with the lever on the right.
- Place the mech on the seat slide and align the 4 fixing points to the seat slide fixing points.



- Use the 4 small bolts that came with the seat slide to attach the mech with the seat slide.

Note: Using bolts longer than 20mm may obstruct the seat slide mechanism, making it unable to function.

