

TECHNICAL SHEET

ARMAND

CHARACTERISTICS

SHELL

<p>SIDE BACK PLINTH</p>	<p>Materials: Melamine bonded particle board panels, 2 decorative faces Density: 630 - 710 kg/m³ Thickness: 19 mm</p> <p>Adjustable stabiliser feet: Plinth with adjustable stabiliser feet to screw in the inserts M10 4 adjustable stabiliser feet (L. 800 mm) 5 adjustable stabiliser feet (L. 1000 mm) 6 adjustable stabiliser feet (L. 1200 mm) Adjustment through 15 mm Plinth: Useful load when spread out or evenly distributed: 50 kg</p> <p>Assembly: cam lock nuts located on pin</p>
<p>DECORATIVE TOP</p>	<p>Materials: Melamine bonded particle board panels, 2 decorative faces Density: 630 - 710 kg/m³ Thickness: 25 mm (except low module and partition unit = 19 mm) Finish: - Matching the melamine doors (for 735 mm desk extension cupboard) - Matching the cabinet body (all heights)</p> <p>Structural decorative top</p>
<p>PANEL EDGE BANDING</p>	<p>Materials: ABS narrow Thickness: 2 mm (for the tops) or 0.8 mm for other parts Finish: matching panel finish</p>


OPENING MECHANISM

<p>SWING DOORS</p>	<p><u>In melamine:</u></p> <p>Materials: Melamine bonded particle board, 2 decorative faces Density: 630 - 710 kg/m³ Thickness: 19 mm Edge banding: narrow - 8/10th mm thick, matching top</p> <p>Hinge: With integrated damping, opening 100° Lock mechanisms: 1-point lock for small and medium doors, 2-point lock with 2 locking rods for large doors. Optional master key for all doors Lock with 2 keys (one capped and folding). H. 735 / H. 1135 / H 735 cm - all widths: 4 hinges H. 2021 mm - L. 800 & 1000 mm: 6 hinges H. 2021 mm - L. 1200 mm: 8 hinges Handle: in aluminium with anodised silver finish - spacing 96 mm - Dimensions: 136 x 25 mm</p>
<p>SWING DOORS</p>	<p><u>In glass:</u></p> <p>Materials: Toughened safety glass Thickness: 6 mm Hinge: Standard hinge - Opening angle 110° Chromed for cupboards with aluminium, black and white body. 3 hinges for high door, 2 hinges for medium door, 1 hinge for low door Handle: In aluminium with anodised silver finish - Spacing 96 mm - Dimensions: 136 x 25 mm Lock: no lock</p>



SLIDING DOORS	<p><u>In melamine:</u></p> <p>Materials: Melamine bonded particle board panels, 2 decorative faces Density: 630 - 710 kg/m³ Thickness: 19 mm Edge banding: narrow - 8/10th mm thick, matching top</p> <p>Rail: Aluminium rail (W1000 & W1200 mm) for cupboards of height ≥ 735 mm, ABS rail (W1650 mm) for counter-top cabinets. End stop and two plastic noise dampers Lock mechanisms: Push lock for sliding door Handle type: Profiled metal grip handles running the length of the cupboard door. Finishes matching the body of the cabinet for solid colours, and white for wood finishes</p>
	<p><u>In Altuglas® PMMA:</u></p> <p>Materials: Altuglas® PMMA: Thickness: 4 mm Handle: Circular grip, chromed finish</p>
DRAWERS	<p><u>In melamine:</u></p> <p>Materials: Melamine bonded particle board panels, 2 decorative faces Density: 630 - 710 kg/m³ Thickness: 19 mm Sliding mechanism: 2 telescopic cradles in black metal for suspended files - backless Handle: in aluminium with anodised silver finish - Spacing 96 mm - Dimensions: 136 x 25 mm</p>

INTERNAL FITTINGS

SHELVES	<p><u>In melamine for swing and sliding door versions (included in widths 800 & 1000)</u></p> <p>Materials: Melamine bonded particle board panels, 2 decorative faces Density: 630 - 710 kg/m³ Thickness: 19 mm for W. 800 mm and 25 mm for W. 1000 mm Adjustment: adjustment range 32 mm; 3-4 positions (depending on height) Load per shelf: useful load when spread out or evenly distributed: 30 kg (thickness 19 mm)/ 50 kg (thickness 25 mm)</p> <p><i>*Only metal shelves can accommodate suspended files.</i></p>
	<p><u>In metal for swing and sliding door versions (included in width 1200)</u></p> <p>Materials: Sheet metal thickness 7/10th mm Thickness: 30 mm Finishes: lower support to take suspended files Adjustment: adjustment range 32 mm between positions; 3-4 positions (depending on height) Load per shelf: useful load when spread out or evenly distributed: 50 kg</p> <p><i>*Only metal shelves can accommodate suspended files.</i></p>
WARDROBE UNIT	<p>Interior fittings 2/3 wardrobe - 1/3 shelves (3 adjustable shelves) Wardrobe section can be mounted on the right or left 1 fixed top shelf (space 396 mm) Telescopic rod fixed under the top shelf in the depth direction Lock: 2-point lock with 2 locking rods for large doors</p> 
OTHER	<p><u>Refrigerated unit:</u> /!\ Position the refrigerator cabinet at least 5 cm from the wall to avoid overheating.</p> <p>Dimensions: L. 700 x H. 432 x D. 800 mm - Back perforated for refrigerator heat dispersal Refrigerator: Volume 25 l - Dimensions: D. 395 mm / L.384 mm - Energy class A+ - NTE (noiseless thermo-electrics) technology - no freezer - ideal for drinks</p>



DIMENSIONS AND WEIGHT

SWING DOORS & BOOKCASE

Melamine & glass doors / Drawer credenza

OVERALL DIMENSIONS (in mm)

Depth	432											
Width	800				1000				1200			
Height	735	1135	1335	2021	735	1135	1335	2021	735	1135	1335	2021

USEFUL DIMENSIONS (in mm)

Depth	390											
Width	761				961				1161			
Height	669	1069	1267	1955	669	1069	1267	1955	669	1069	1267	1955
Ringbinder height	2 RH	3 RH	3 RH	5 RH	1 RH*	3 RH	3 RH	5 RH	1 RH*	3 RH	3 RH	5 RH


WEIGHT (in kg)

Weight supported by shelves	30	30	30	30	50	50	50	50	50	50	50	50
-----------------------------	----	----	----	----	----	----	----	----	----	----	----	----

Adjustment

Adjustment between each space: 32 mm. Compatible with files of height < 32 cm.
 * Specificities: For the cupboards W.100/120 x H.735, 2 spaces of 31 and 32 cm (1 RH)

Shelf adjustment range

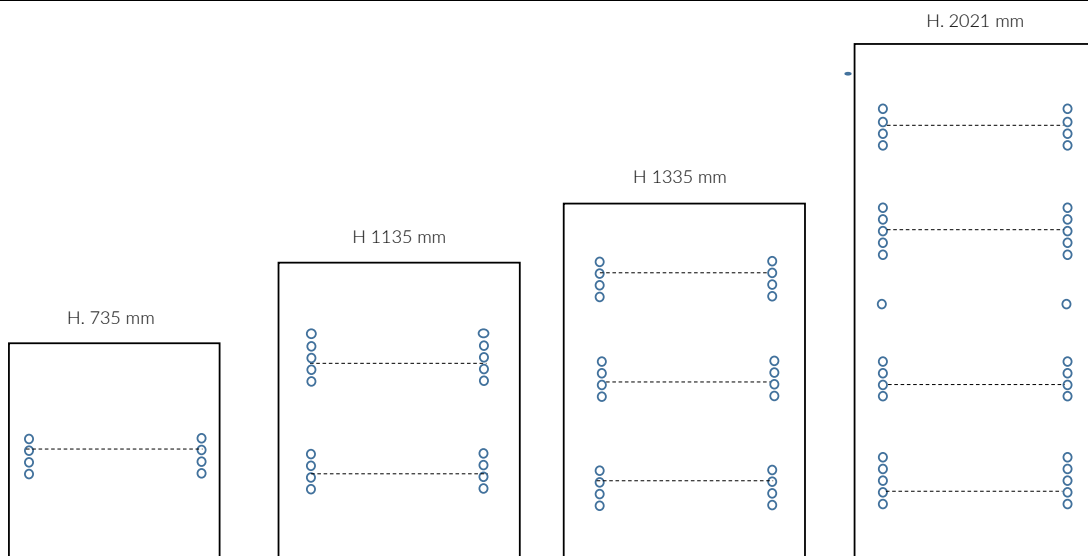

* Attention: on the width 120 mm, some positions are used for fitting hinges. This list is not exhaustive. Other positions can be accessible for the installation of shelves



SLIDING DOORS

Melamine doors - Altuglas

OVERALL DIMENSIONS (in mm)

Width	1000				1200				1650			
Depth	432											
Height	552	735	1135	1335	552	735	1135	1335	425/552	735	1135	

USEFUL DIMENSIONS (in mm)

Width	961	961	961	961	1161	1161	1161	1161	1522	761 x 2	761 x 2	
Depth	360											
Height	375	669	1069	1267	375	669	1069	1267	375	669	1069	
Ringbinder height	1 RH	1 RH*	3 RH	3 RH	1 RH	1 RH*	3 RH	3 RH	1 RH	2 RH	3 RH	


WEIGHT

Weight supported by shelves	50	50	50	50	50	50	50	50	50	50	50	
-----------------------------	----	----	----	----	----	----	----	----	----	----	----	--

Adjustment

Adjustment between each space: 32 mm
 * Specificities: For the cupboards W.100/120 x H.735, 2 spaces of 31 and 32 cm (1 RH)

Shelf adjustment range

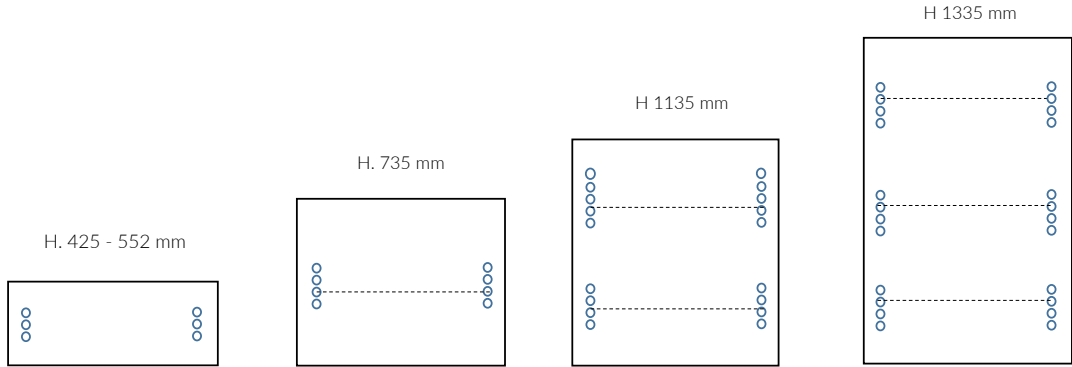

* Note: This list is not exhaustive. Other positions can be accessible for the installation of shelves

