



Overview

HP ProDisplay P232 23-inch Monitor

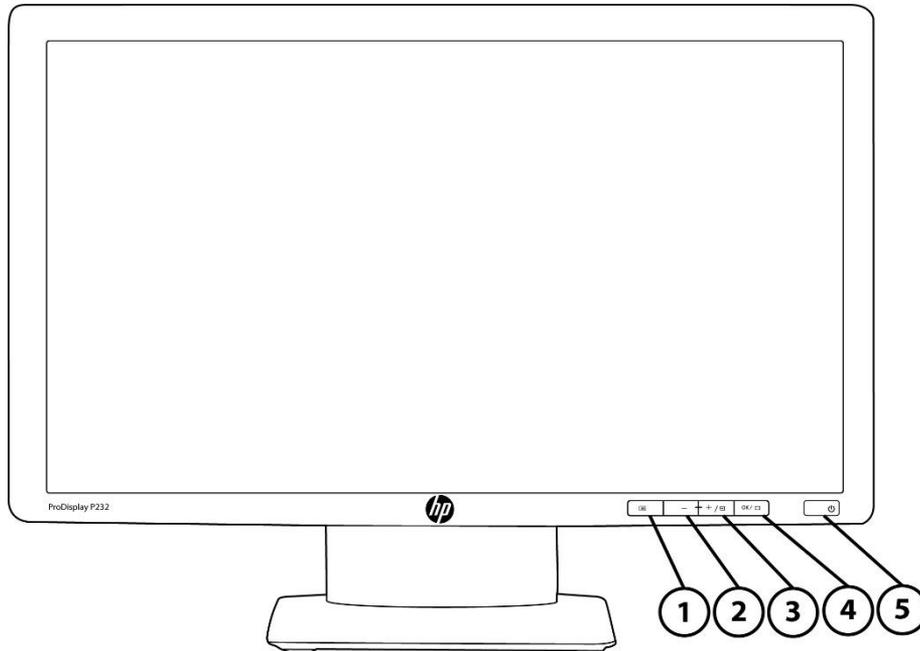

- 1. Menu button
- 2. Minus ("-")
- 3. Plus ("+") /Source


- 4. OK/Auto,
- 5. Power button and LED

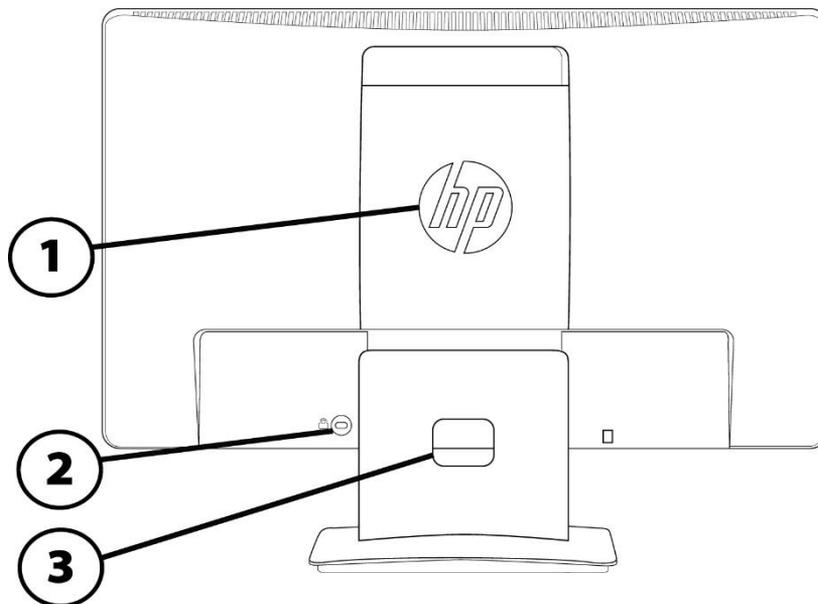


- 1. VESA mounting pattern available behind cover
- 2. Security lock slot

- 3. Cable routing opening

Overview

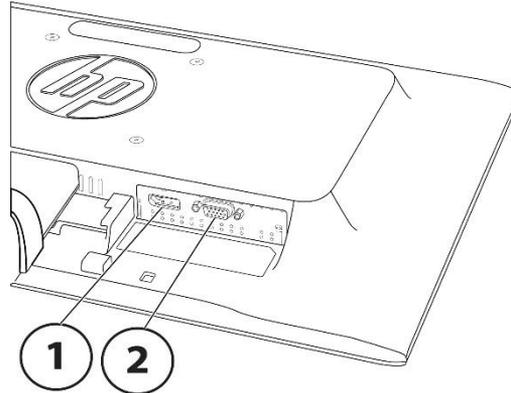

1. DisplayPort v 1.2
2. VGA

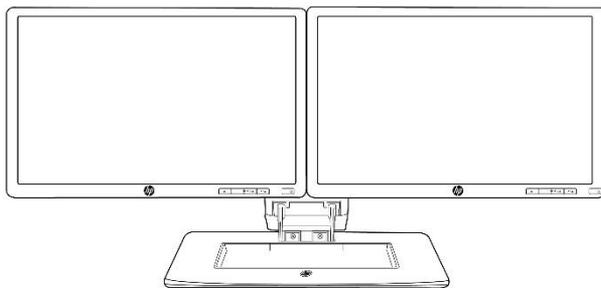

HP ProDisplay P232 and HP Adjustable Dual Display Stand dual monitor configuration shown. (Note: monitors and stands sold separately)

Your ideal office configuration begins with two HP ProDisplay P232 monitors combined with an HP Adjustable Dual Display Stand (AW664AA) for a small footprint, high productivity work solution.*

*NOTE: Multi-monitor support is dependent on your system. Check your user guide or technical specifications for compatibility. Optional accessories may be required.

Overview

Project your HP Pro PC content to a 23-inch diagonal display with the HP ProDisplay P232 Monitor, which has a sleek design, essential presentation features, and advanced connectivity for your everyday business productivity, all at a highly affordable price point.

Key features:

- Experience stunning FHD picture quality, ultra-fast graphics refresh, and vivid colors with DisplayPort.
- Attach your HP PC or select HP Thin Client directly behind the display.¹
- Reduce power consumption and help lower your costs with an energy-efficient design.
- Enjoy crisp, clear Full HD color for all of your content on the 23-inch diagonal screen.
- Free up valuable desk space with mounting options² enabled by the 100-mm VESA pattern.
- Customize a total solution with options² designed for your display.
- Design the screen for how you work with HP Display Assistant software.
- Get award-winning service and support by phone or online.

¹ Requires HP Quick Release, sold separately. See product QuickSpecs for exact PC and thin client compatibility.

² Each accessory sold separately. Mounting hardware sold separately. Head only model sold separately and availability varies by region.

Technical Specifications

Models:

K7X31AA- HP ProDisplay P232 23-inch Monitor

X3B48AA - HP ProDisplay P232 23-inch Monitor Head Only (available in APJ only)

Panel	Type	23-inch TN w/LED backlight
	Viewable Image Area (diagonal)	58,42 cm (23-inch) widescreen; diagonally measured
	Panel Active Area (W × H)	50,92x 28,64 cm (20.05 x 11.27 in)
	Resolution	1920 x 1080 @ 60 Hz
	Aspect Ratio	16:9
	Viewing Angle	Up to 170° horizontal/160° vertical typical
	Brightness	250 cd/m ²
	Contrast Ratio (Typical)	1000:1 Static; 5,000,000:1 Dynamic (DCR)
	Response Time (Typical)*:	5 ms on/off
	Pixel Pitch	0.265 (H) x 0.265 (V)mm
	Pixels Per Inch (PPI)	96
	Backlight Lamp Life (to half brightness)	30,000 hours minimum
	Color Support	Up to 16.7 million colors with the use of FRC technology
	Color Gamut (Typical)	72%

* Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

User Controls	Buttons or Switches	Menu, Minus ("-"), Plus ("+") /Source, OK/Auto, Power
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
	On Screen Display (OSD) User Controls	Brightness, Contrast, Input Control, Color Control, Image Control, Power Control ,OSD control, Management, Language, Information
Signal Interface/ Performance	Horizontal Frequency	24-80 kHz
	Vertical Frequency	50-60 Hz
	Native Resolution	1920 x 1080 @ 60 Hz
	Preset Graphic Modes (non-interlaced)	1920 X 1080 @ 60 Hz 1680 X 1050 @ 60 Hz 1600 X 900 @ 60 Hz 1440 X 900 @ 60 Hz 1280 X 1024 @ 60 Hz 1280 X 720 @ 60 Hz 1024 X 768 @ 60 Hz 800 X 600 @ 60 Hz 640 X 480 @ 60 Hz

Technical Specifications

	Maximum Pixel Clock Speed	170 MHz	
	Anti-Glare	Yes	
Video/Other Inputs	Plug and Play	Yes	
	Input Connectors	(1) DisplayPort 1.2, (1) VGA HDCP support on DisplayPort	
	USB	N/A	
	Video Cables Included	1) DisplayPort 1,8 m (5.9 ft) ; (1) VGA 1,8 m (5.9 ft)	
	Audio	N/A	
Multimedia	Speakers	N/A	
Power	Power Supply	Internal	
	Input Power	100 - 240 VAC 50/60 Hz	
	Maximum Power	30 W	
	Typical Power	24 W	
	Sleep Power	0.5 W (standby)	
	Power Cable Length	1,9 m (6.2 ft)	
Mechanical	Dimensions (W × D × H)	Unpacked w/stand	54,86 x 18,5 x 40,83 cm (21.6 x 7.31 x 16.07 in)
		Unpacked w/o stand (head only)	54,86 x 34,63 x 5,5cm (21.6 x 13.63 x 2.16 in)
		Packaged	63,2 x 14 x 42,2 cm (24.9 x 16.6 x 5.5 in)
	Weight	Head Only	3,4 kg (7.5 lb)
		Unpacked with stand	4 kg (8.82 lb)
		Packaged	5,8 kg (12.79 lb)
Ergonomic Features - Not available on head only model	Detachable Stand	Yes, ships detached	
	Height Adjustment	N/A	
	Tilt Range	-5° to +22°(+0/-3)	
	Swivel	N/A	
	Pivot	N/A	
Environmental	Temperature - Operating	5° to 35° C (41° to 95° F)	
	Temperature - Non-operating	-20° to 60° C (-4° to 140° F)	
	Humidity - Operating	20% to 80% non-condensing	
	Humidity - Non-operating	5% to 95%, 38.7° C max wet-bulb	
	Altitude - Operating	0 to 5,000 m (0 to 16,404 ft)	
	Altitude - Non-operating	0 to 12,192 m (0 to 40,000 ft)	

Technical Specifications

	White LED Backlights	Yes
	CCFL Panel	No
	Arsenic-Free Display Glass	Yes
	Low Halogen¹	Yes (except cables)
	Mercury-Free Display Backlighting	Yes
Options	HP Adjustable Dual Display Stand —Part Number AW664AA	Premium space-saving dual screen solution provides access to more monitor real estate and makes it possible to manage multiple applications simultaneously. Weight adjustable for dual monitors from 17-24". Rotate displays into portrait/landscape positions.
	HP Integrated Work Center for Desktop Mini and Thin Client —Part Number G1V61AA	Make the most of small work spaces with an HP IWC Desktop Mini/Thin Client that lets you create a compact desktop solution by combining a compatible display up to 24 diagonal inches with your choice of compatible platform to give you convenient front access to all of its inputs.
	HP DisplayPort Cable Kit —Part number VN567AA	Connects a DisplayPort connector on an HP Business Desktop computer to a DisplayPort connector on a monitor
	HP LCD Monitor Quick Release —Part number EM870AA ⁴	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.
	HP Business PC Security Lock Kit —Part number PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
What's in the box?	Monitor and Accessories	HP ProDisplay P232 23-inch Monitor, AC power cord (1.9m) 6.2 ft, DisplayPort cable (1.8m), 5.9 ft, VGA cable (1.8m), 5.9 ft
	Documentation	CD (includes user guide, warranty, drivers)
	Software	HP Display Assistant
Other	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Color	Black
	VESA Mounting	100 mm VESA mount
	Security Lock-Ready	Yes
	Country of Origin	China
Certification and Compliance	TCO Certified, CEL Grade 1, Microsoft WHQL Certification (Windows 8.1 and Windows 7), ENERGY STAR® Qualified, EPEAT® 2019 Registered, CE; CB; KC/KCC; NOM; PSB; ICES; TUV; TUV-GS; S-Mark; ISO	

Technical Specifications

9241-307; EAC; UL; CSA; PSB; ISC; CCC; CEL; CECP; SEPA; TCO Certified Edge; VCCI; FCC; RCM; BSMI; Vietnam MEPS; Australian-New Zealand MEPS; WEEE

Compatibility

Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.

Service and Warranty

Protected by HP, including a 3 year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties.³

© Copyright 2019 Hewlett-Packard Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

1. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
2. Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit <http://www.epeat.net> for more information.
3. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See <http://www.hp.com/go/cpc> for details.
4. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

