

SR560-FLIP



VESA® Pattern
400 x 400mm




Max load
70lb (31.8kg)

Mobile Cart with Rotational Interface

FOR THE **SAMSUNG** 55" FLIP (WM55H)

Peerless-AV's Mobile Cart with Rotational Interface has been designed to support the features and functionality of the 55" Samsung Flip display. Mobility, appealing design, display height adjustment and a pre-assembled base ensure quick assembly, while providing a rigid, but attractive structure to match the display. The 4" casters make it easy to move from room-to-room and optional bumper accessories ensure nothing is damaged along the way. The mount's rotational interface allows the user to easily rotate the display 90° from landscape to portrait, and holds the display at a negative 4.5° to further promote ergonomics with a more natural angled writing surface. The unique cable management system allows cables to be routed through the interface, which keeps the cabling safe and abrasion free when rotating the display. With a robust feature set featured on safety and durability, the Mobile Cart with Rotational Interface is ideal for collaboration spaces in corporate or education settings.

- Display can be located anywhere along the column for perfect viewing height (up to 60" at center)
- Rotational interface smoothly rotates the display from landscape to portrait, while providing the stability for a touch display
- Integrated cable management protects, contains and conceals cables for a clean, professional installation
- Rotational interface holds the display at a negative 4.5° to further promote ergonomics and a more natural writing surface
- Maneuvers easily on 4" (102mm) swivel casters, two locking
- Pre-assembled base provides rigidity, stability and quick assembly
- Gloss white, powder coat finish closely matches the Samsung Flip finish
- 400 x 400 VESA® and custom length M8 hardware provide the proper mounting solution for the Samsung Flip

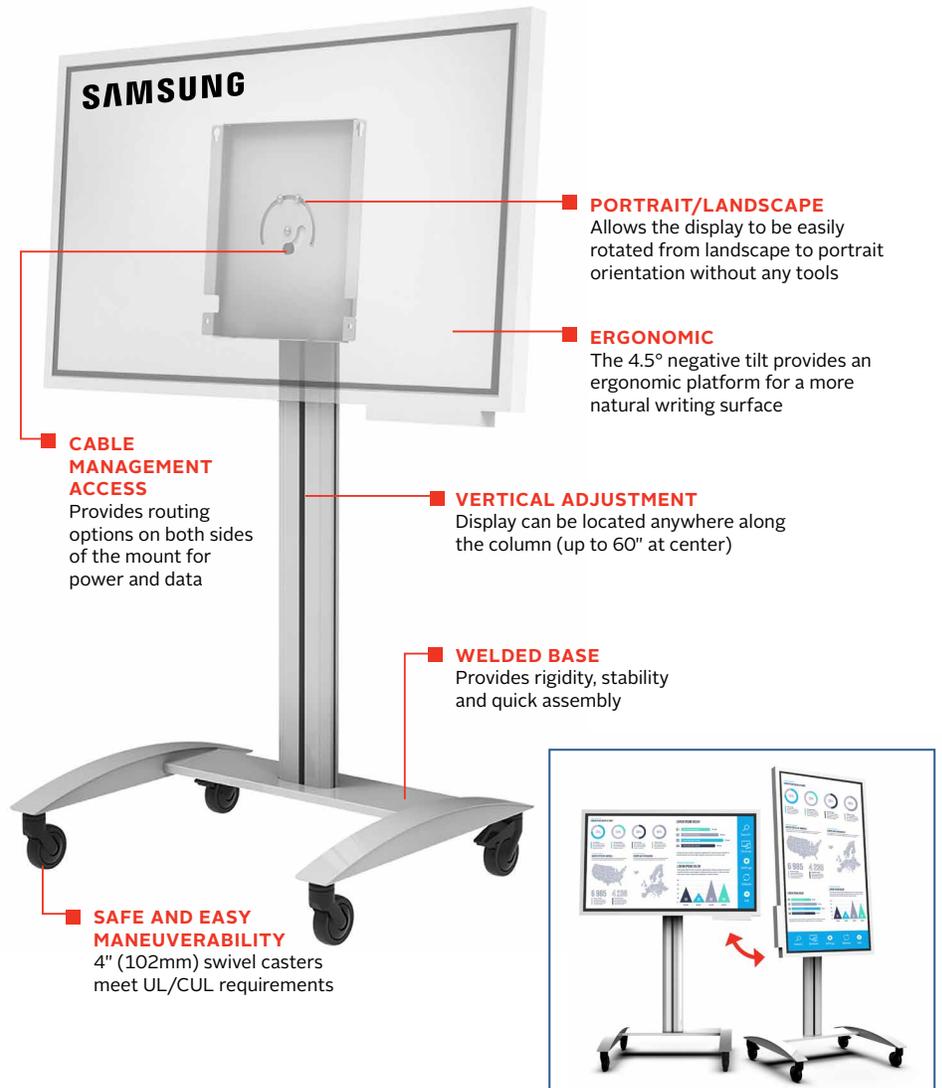

Easily Rotates from Landscape to Portrait



RoHS

SR560-FLIP	Mobile Cart with Rotational Interface for the Samsung 55" Flip (WM55H)
-------------------	--

Product Specifications

	DIMENSIONS (W X H X D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SR560-FLIP	35.01" x 64.23" x 29.00" (889 x 1632 x 737mm)	70lb (31.8kg)	70lb (31.8kg)	Powder Coat	Gloss White

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use. Visit agion-tech.com for more details.


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SR560-FLIP	48.00" x 40.00" x 8.50" (1219 x 1016 x 216mm)	81.75lb (37.1kg)	735029324652	Assembled Base, Aluminum Column, Universal Display Adaptor, (2) Swivel Casters, (2) Locking Swivel Casters, Hardware & Instructions	1


Accessories

- | | |
|---|---|
| ACC310: Feet Accessory | ACC-BPR: Bumper Accessory for legs |
| ACC316: Safety Belt | ACC-LA: Laptop Arm |
| ACC320: Electrical Outlet Strip with Cord Wrap | ACC-MS: Metal Shelf |


All dimensions = inch (mm)

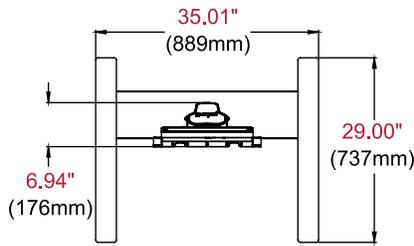


TOP VIEW

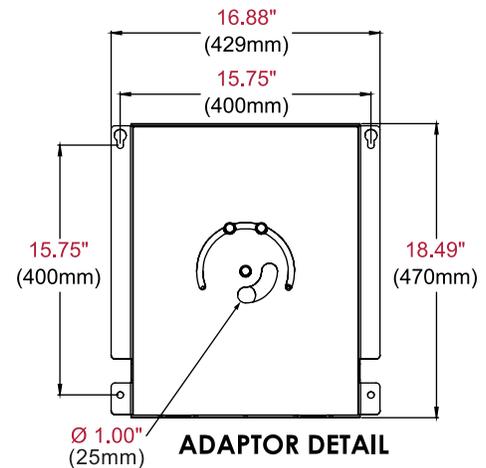

ADAPTOR DETAIL

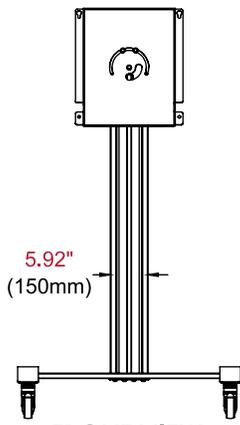

FRONT VIEW

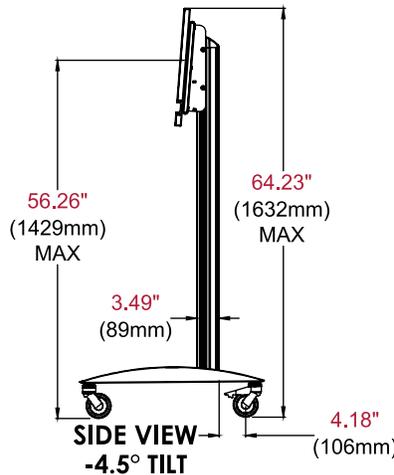

**SIDE VIEW
-4.5° TILT**

Architect Specifications

The Mobile Cart with Rotational Interface shall be a Peerless-AV model SR560-FLIP and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV EMEA
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

