



Cut protection

KRYTECH 836

High risk - ISO D

Excellent cut protection and resistance to wear with optimal dexterity and comfort.



CUT PROTECTION
LEVEL D

EN388



4X43D

EN407



X1XXXX

ISO 13997:

17.2 N

CAT.2



SPECIFIC ADVANTAGES



Cut protection

- Excellent cut resistance on all parts of the glove. Reinforced protection of the fore-arm thanks to its longer cuff.

Puncture protection

- Good resistance to wear and good puncture resistance (barbs) due to leather palm.



Durability

- Reinforced crotch between thumb and forefinger



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



Washability

- Dry cleaning: Up to 5 times without any alteration on performances* to extend glove lifespan, reduce costs and waste

INDUSTRIES

- Automotive/mechanical industry

APPLICATIONS

- Cutting strips (plasma etc.)
- Handling parts post-press
- Handling sheet metal
- Handling untrimmed parts or sheet metal
- Metal working





Cut protection

KRYTECH 836

High risk - ISO D

LEGENDS

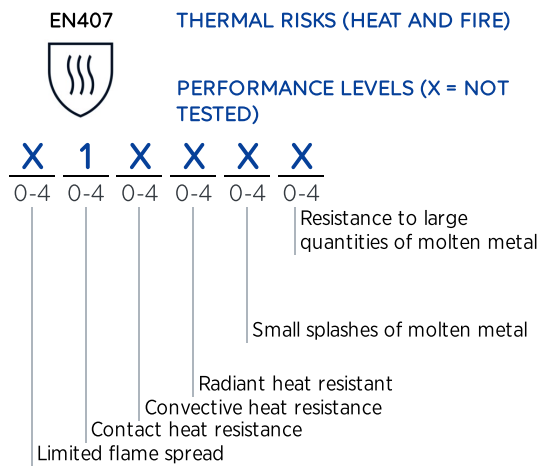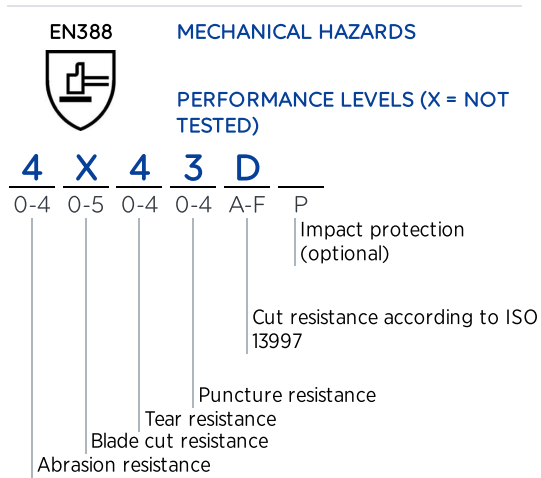

PRODUCT DETAILS

Interior finish	Seamless textile support from HDPE fibres
Gauge	13
Exterior finish	Leather layer on palm with reinforced thumb / index
Cuff characteristic	Knitted Cuff
Colour.s	Grey
Size	7 8 9 10 11

LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/bag 48 pairs/carton
-----------	---

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/03/19/0881
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE

Edit 06/09/2022

* Tests carried out on unworn gloves (i.e. in new condition) which differs from the reality in the field.