# SF660(P)



Display size **39"-80"** 



Max load **200lb (91kg)** 

### **SMARTMOUNT.**

## Universal Flat Wall Mount


FOR 39" TO 80" DISPLAYS

The SmartMount® Universal Flat Wall Mount series offers the most versatile installation features and mounting options. Horizontal and vertical adjustment abilities allow for post installation leveling and side-to-side positioning, making it easier than ever to find the perfect TV position. The SF660(P) models' low-profile design offers the sleek, aesthetically pleasing look to fit into any décor. Security screws provided in the SF660 models deter tampering and theft. The open wall plate design offers total wall access, increasing the electrical and cable management options. The display can now simply be installed by a single person with the Hook-and-Hang™ system. The Easy-Glide™ adaptors hook onto the wall plate for an overall quick, simple, and secure installation.

The SF660's design positions the display just 1.20" from the wall, perfect for almost any low-profile application.

#### **Additional Features**

- Universal mount fits displays with mounting patterns up to 824 x 405mm (32.44" W x 15.95" H)
- Low-profile design holds display only 1.20" (30mm)
- Up to 0.25" (6mm) of vertical adjustment on each universal display adaptor bracket for postinstallation leveling and height adjustment fine-tuning
- Horizontal display adjustment up to 8.00" (203mm) for centering display on wall
- Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- Includes all necessary wall and display attachment hardware
- Integrated security options available
- Design is UL listed and tested to four times stated load capacity

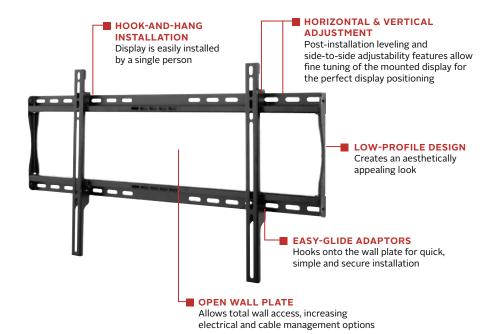



Low-profile design for a sleek, yet compact installation





Please visit peerless-av.com/en-us/patents for patent information.

SF660P SF660 SmartMount® Universal Flat Wall Mount for 39" to 80" Displays - standard models SmartMount® Universal Flat Wall Mount for 39" to 80" Displays - security models

#### **Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SF660(P)	34.12" x 16.89" x 1.20" (867 x 429 x 30mm)	5.60lb (2.54kg)	200lb (91kg)	Scratch resistant fused epoxy	Semi-gloss black


#### **Package Specifications**


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SF660(P)	36.41" x 1.57" x 10.71" (925 x 40 x 272mm)	7.60lb (3.45kg)	SF660: 735029235590 SF660P: 735029235620	Wall mount, wall and display installation hardware, installation instructions	1

#### **Accessories**

ACC415: Metal Stud Fastener Kit


All dimensions = inch (mm)






#### **WALL PLATE**

**VERTICAL ADAPTOR** 





#### **Architect Specifications**

The Smartmount® Universal Flat Wall Mount shall be a Peerless-AV model SF660(P) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

#### Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

#### Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

#### Peerless-AV de México

Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

