ST680(P)



Display size 60"- 98"


Max load LB (KG) 350lb (158kg)

SMARTMOUNT. Universal Tilt Wall Mount

FOR 60" TO 98" DISPLAYS

Peerless-AV's SmartMount® Universal Tilt Wall Mount delivers an ultra-slim profile designed to hold large displays up to 350lb. Installation and maintenance are made easy with the ST680's robust feature set. Auto-latching adaptor rails automatically secure the display without the use of a tool. The mount's built-in kickstand holds the display safely from the wall during cable routing, while the open wall plate allows for increased electrical and cable management options. Horizontal and vertical display adjustment allow for quick fine-tuning of the mounted display.

The ST680(P) reduces installation time and provides the most stable mounting solution for large interactive displays.

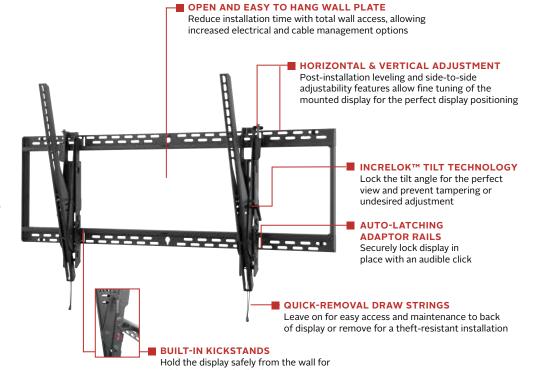

cable routing and effortless maintenance





Comes in color packaging with included installation hardware and easy to follow instructions.

Additional Features

- M Universal mount fits displays with mounting patterns up to 1061 x 650mm (41.76" W x 25.59" H)
- Adjustable up to 15° of forward tilt and -5° of backward tilt for the M optimal viewing angle
- M Optional IncreLok[™] feature offers fixed tilt angles of -5°, 0°, 5°, 10°, 15°
- M Easy-Grip[™] ratcheting handle locks the display into place
- Easy hang wall plate allows a bolt to be pre-installed to ease wall plate M installation
- Ø Laterial display adjustment up to 19.25" (489mm)
- M 1" of post-installation vertical adjustment provides flexibility in the installation
- M Includes fastener pack with all necessary mounting and display attachment hardware (including M10)

info@peerless-av.com neerless-av.com

Please visit peerless-av.com/en-us/patents for patent information.

+15°/-5° of tilt for versatile viewing angles



Model Numbers

 ST680P
 SmartMount® Universal Tilt Wall Mount for 60" to 98" Displays - standard models

 ST680
 SmartMount® Universal Tilt Wall Mount for 60" to 98" Displays - security models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
ST680(P)	45.75" x 26.50" x 3.38"-10.58" (1162 x 673 x 86-269mm)	19.13lb (8.7kg)	350lb (158kg)	Scratch resistant fused epoxy	Semi-gloss black


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKA	GE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
ST680(P)	46.70" x 4.70" x 15.40" (1185 x 120 x 390mm)	22.13lb (10.04kg)	ST680: ST680P:	735029242314 735029242338	Wall mount, wall and display installation hardware, installation instructions	1

Accessories

ACC615: Metal Stud Fastener Kit

All dimensions = inch (mm)

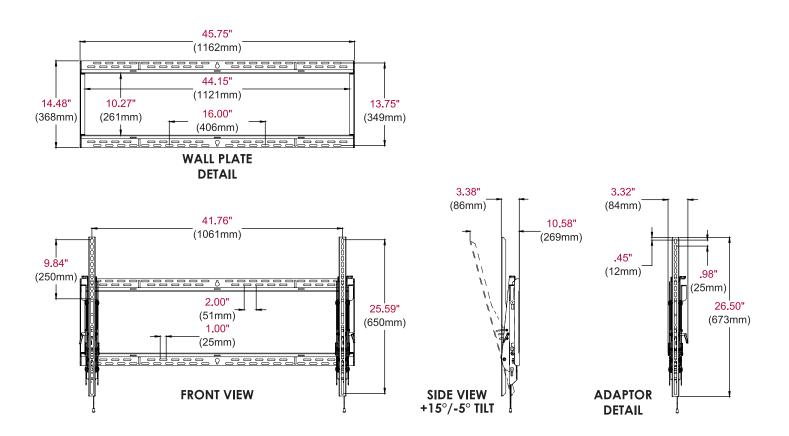

Architect Specifications

The Smartmount[®] Universal Tilt Wall Mount shall be a Peerless-AV model ST680(P) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories. Peerless-AV 2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500 Peerless-AV Europe Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom +44 (0) 1923 200100 Fax: +44 (0) 1923 200101 Peerless-AV de México Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050 +52 (81) 8384-8300 Fax: +52 (81) 8384-8360

