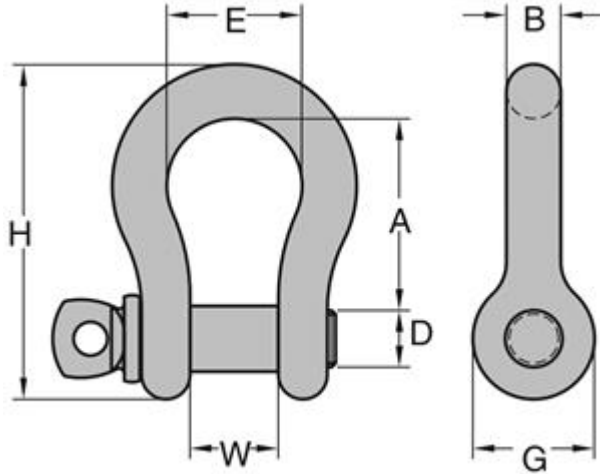


**Peerless Industrial Group**1416 East Sanborn St.,  
Winona MN 55987**Phone:** (800) 873-1916 • **Fax:** (800) 356-1149**Email:** [custserv@peerlesschain.com](mailto:custserv@peerlesschain.com)**Website:** [www.peerlesschain.com](http://www.peerlesschain.com)
**PEERLESS**  
 INDUSTRIAL GROUP

**Item # 8058105, Peer-Lift Screw Pin Anchor Shackles - Alloy Pin, Carbon Body**


Screw Pin Anchor Shackles are ideal for those applications where frequent pin removal is needed.

- Meet or exceed FED SPEC RR-C-271D requirements.
- Meet ASME B30.26 Requirements
- Hot Dipped Galvanized to ASTM A153.
- Proof load at 2 times the Working Load Limit.
- Ultimate load at 6 times the Working Load Limit.

(RR-C-271F, Type IVA, Grade A, Class 2)

Trade Size (Inches)	3/16
Pin Dia. (D)	1/4
Dim A	0.875
Dim B	0.180
Dim E	0.562
Dim G	0.625
Dim W	0.375
Quantity Per Pkg.	25
Lbs. Per Ea.	0.06
Working Load Limit (Tons)	1/3

