




# PRODUCT DATA SHEET

White Lithium Grease, 10 Wt Oz  
No. 03080

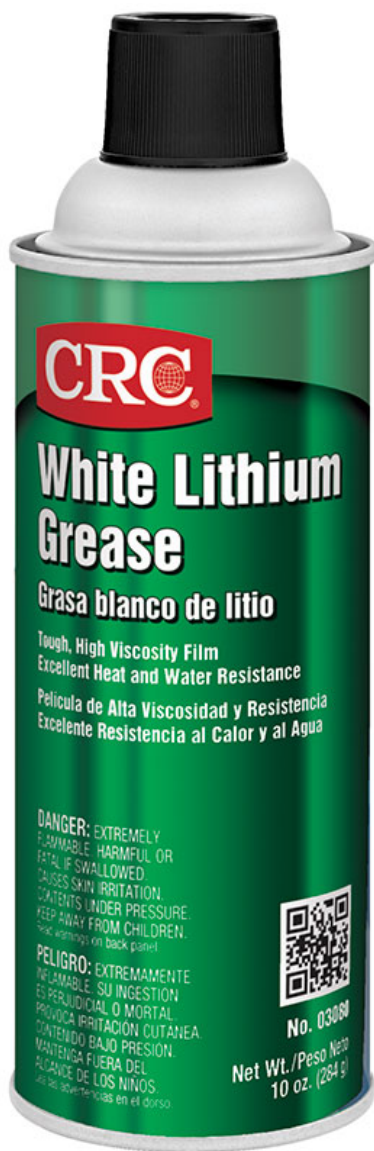

## Product Description

Superior lubrication and durability in any weather or temperature. Perfect for use as a break-in lubricant for bearings or as a general purpose lubricant and corrosion inhibitor for tools, machinery and equipment.

## Applications

Hinges, latches, overhead door tracks, open gears, chains, cables, slide conveyors, guide rails, cams, pistons, machinery, tools, & equipment. A break-in lubrication for bearings.

## Unit Package Description

16 Ounce Aerosol

## Brand

CRC

## Generic Description 1

White Lithium Aerosol Grease

## Net Fill

10 Wt Oz

## UPC Code

078254030807

## Unit Dimensions

7.75H x 2.63W x 2.63D in

## Units Per Case

12

## Case Dimensions

8.1H x 8.3W x 11.1D in

## Cases Per Pallet

133

## Case Weight

11 lbs

## I 2 of 5 Code

30078254030808

## Appearance

Off-White Viscous Grease

## Base Type

Lithium Stearate

## Flash point (F)

<0°F

## Flash point (C)

<-18°C

## Flammability Class - CPSC

Extremely Flammable

## Spec Gravity Concentrate

0.6257

## Plastic Safe

Yes

## Film Type

Grease

## Evaporation Rate

Fast

## NLGI Grade

2

## Working Temp (F)

0 to 300°F

Last revised: 5/4/2016  
Page 1 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET



Working Temp (C)	-17.8 to 148.9°C
Propellant	Hydrocarbon
NSF Category Code	H2
NSF Number	017410
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Federal)	85
VOC g/L (Federal)	531.8
VOC Lbs./Gal. (Federal)	4.43
VOC Category	Not Regulated
Removal (How To)	Remove with Petroleum Distillates.

Last revised: 5/4/2016  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.