

PRODUCT GUIDE

SSS Engi

aintenance Differential Additives

Steel Re-Nu Sta-Lube

Fuel Addition Corrosion

Syntha-Tech:

E Contact Cleane

Precision Cleaners

Wasp & Hornet Killer PLUS

1-TANK Pow

Cleaners

Aviation Degreaser

SP-350

Screwloose

True Tap

I-FOIG

Transmission Main

Diesel Prod

Winter Products


QD Contact Cleaner Leak Stoppers

Perma-Lock

Super De Stor Ave

Motor/Ireanning

YOUR BEST SOLUTION™

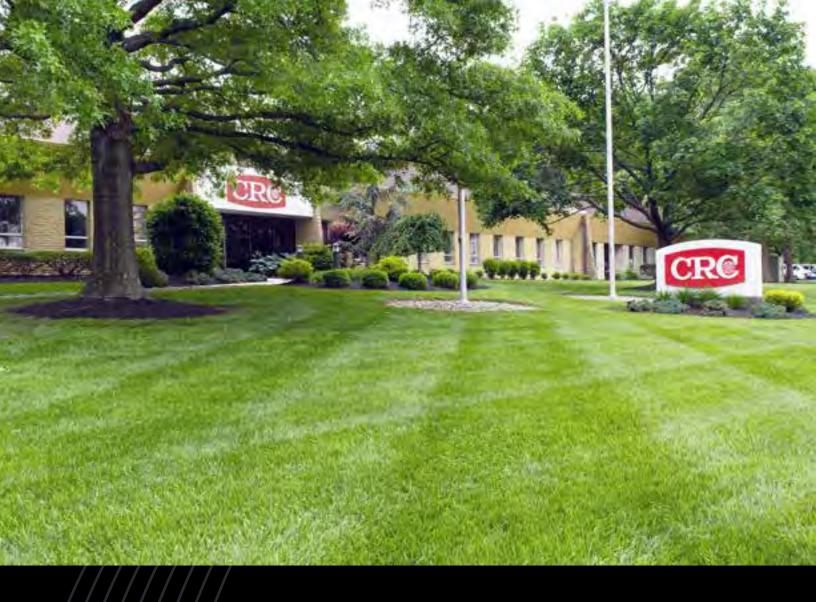

CRC, one of the world's leading manufacturers of chemical maintenance products for over 55 years, has made a commitment to provide the best solutions for our customers. CRC can help meet the challenges of today's highly regulated environment by offering a full line of specialty chemical products custom-matched to meet every application need.

CRC always has the right solution for our customers' MRO challenges because we offer a broad range of products. We have over 800 SKUs in product categories including Parts Washers, Precision Cleaners, Degreasers, Lubricants, Corrosion Inhibitors, and Sealants. Again and again, more professionals look to CRC for quality products and innovative solutions.

CRC is the only company in the industry to offer the **S.D.[L.]**[®] – a **Safety Data Sheet** printed on the reverse side of the product label. Of course, the information that starts with our label never stops. Just call our toll-free technical service line (800) 521-3168 or visit our website, www.crcindustries.com, for more product information and training.


The quality of our information is matched by the quality of our products. As an ISO-9001:2008 certified manufacturer, CRC places strict controls on every step of our product development and manufacturing process; starting with the finest raw materials and continuing with our consistent, quality manufacturing techniques. Becoming certified to ISO standards is not a requirement, but meeting ISO standards and continually gaining re-certification is an excellent example of our commitment to quality and consistency.

CRC has grown by addressing the needs of our customers, and our commitment to innovation and quality service will allow us to continue to be the one you call when you want the best. This **Product Guide** offers a look at quality products and problem solving programs offered by CRC.

TABLE OF CONTENTS


| | Industrial Cleaners 6 |
|---------------|---------------------------------|
| | Industrial Precision Cleaners 6 |
| | Heavy Duty Degreasers9 |
| | HydroForce® Aqueous Cleaners |
| | Drain Maintenance |
| Second Second | Lubricants16 |
| | Corrosion Inhibitors |
| | Electrical Maintenance |
| | Electrical Precision Cleaners |
| | Heavy Duty Degreasers34 |
| | Electrical Cable Cleaners |
| | Electrical Lubricants |
| | Metalworking 38 |
| | Sealants & Adhesives 40 |
| | Tool & Equipment Oils |
| | Greases |

| | Mold Releases | 49 |
|-----|------------------------------------|----|
| | Insecticides | 51 |
| | Specialty Testing | 52 |
| (A) | Industrial Hand Cleaners | 53 |
| | Equipment | 54 |
| | Paints & Coatings | 55 |
| | Aviation Maintenance | 57 |
| 6 | Vehicle Maintenance | |
| | Marine Maintenance | 63 |
| | SmartWasher® Parts Cleaning System | 68 |
| | Glossary of Term | 71 |
| | NSF Category Codes | 72 |
| | Indicos | 72 |

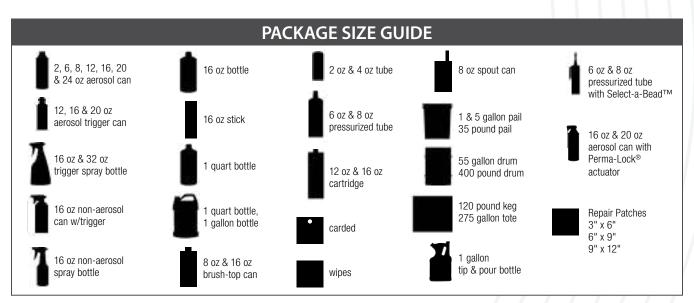


CRC®, Sta-Lube®, K&W®, Marykate® and products denoted w/™ and ® are trademarks or registered trademarks of CRC Industries, Inc. SmartWasher® is a registered trademark of Chem-Free Corporation


LOOKING FOR A PRECISION CLEANER?

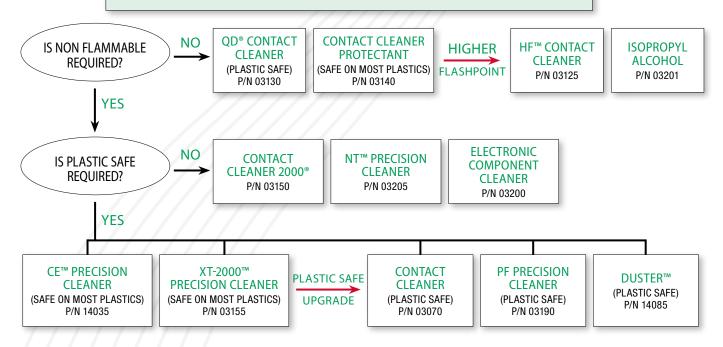


LOOKING FOR A HEAVY DUTY DEGREASER?

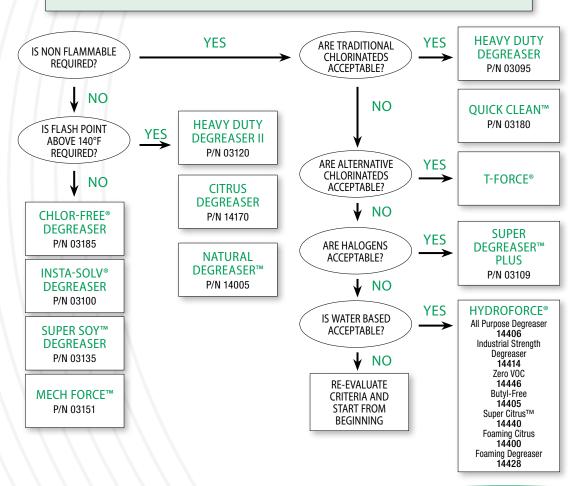

LOOKING FOR A PRECISION CLEANER?

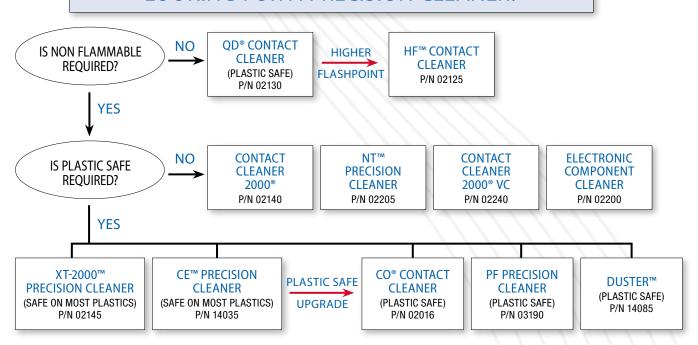

LOOKING FOR A HEAVY DUTY DEGREASER?

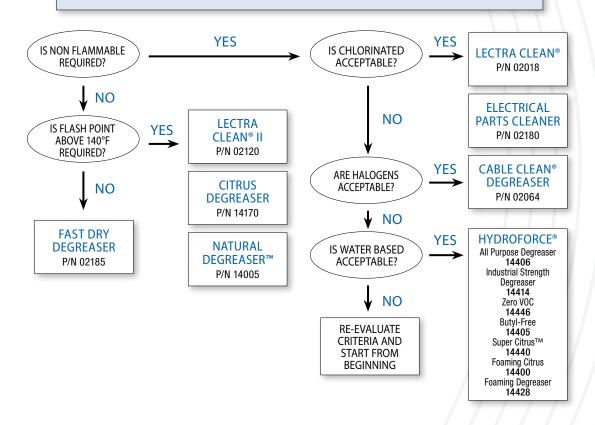

CONTACT CLEANER 2000®

Precision Cleaner

An aggressive general purpose precision cleaner that effectively removes dirt, light oils and other contaminants. It evaporates quickly, leaves no residue and has no flash point. Not recommended for use on Noryl® or polycarbonate type plastics.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 03150 🚺 1 | 16 oz aerosol | 12 |
| 03152 ¹ | 5 gallon pail | 1 |
| 03153 ¹ | 55 gallon drum | 1 |



PF PRECISION CLEANER

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue. PF Precision Cleaner has no flash point and is safe to use on plastics.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03190 | 16 oz aerosol | 12 |



NT™ PRECISION CLEANER

Patented formula NTTM Precision Cleaner relies on advanced COzol® technology to effectively remove dirt, light oils and other contaminants from electronic equipment. It evaporates quickly and leaves no residue. NTTM Precision Cleaner has no flash point and contains no Class I or Class II Ozone Depleting Chemicals and is an optimal alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03205 🕡 1 | 16 oz aerosol | 12 |
| 032081 | 55 gallon drum | 1 |



ELECTRONIC COMPONENT CLEANER

Precision Cleaner

Aggressive cleaner for use on electronic components in industrial, electrical, and aviation applications. Its high purity, fast penetrating formula aggressively dissolves dust, lint, dirt, oils, polar soils, and other contaminants from most non-plastic surfaces. It evaporates very rapidly and leaves no residue.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 03200 🕩 1 | 16 oz aerosol | 12 |



XT-2000™ PRECISION CLEANER

A non-flammable, low odor and rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 03155 🚺 | 16 oz aerosol | 12 |



QD® CONTACT CLEANER

A petroleum distillate and alcohol blended precision cleaner suitable for cleaning sensitive electronics. QD® evaporates quickly, leaves no residue and is safe to use on all plastics. QD® Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03130 🚺 * | 16 oz aerosol | 12 |
| 03134* | 1 gallon can | 4 |
| 03131* | 5 gallon pail | 1 |
| 03132* | 55 gallon drum | 1 |



CONTACT CLEANER

Advanced Technology Formula Contact Cleaner does not contain known ozone depleting substances or VOCs. It provides an optimal alternative to CFC, HCFC, and flammable contact cleaners. Regular use will help prevent electrical failure, increase performance and prolong equipment life. Contact Cleaner will not damage sensitive modern plastics such as Noryl®, ABS and Lexan®.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 03070 🕡 | 16 oz aerosol | 12 |



CE™ PRECISION CLEANER

Azeotropic blend designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. CETM Precision Cleaner has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating without leaving a residue.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 14035 | 16 oz aerosol | 12 |



 ^{□ – 360°} spray valve can be sprayed in the UP or DOWN position.

^{1 –} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

 $[\]text{Noryl}^{\text{@}}$ and $\text{Lexan}^{\text{@}}$ are registered trademarks of General Electric Corporation

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

INDUSTRIAL PRECISION CLEANERS

ISOPROPYL ALCOHOL

Precision Cleaner

A quick drying light-duty precision cleaner for use in electronic and aviation applications. Its 99% pure formula aggressively dissolves grease, dust, dirt, lint, oils and flux.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03201 | 16 oz aerosol | 12 |



DUSTER™

Aerosol Dust Removal System

Safely removes dust from energized equipment without damaging sensitive components or surface finish. CRC Duster™ penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast of product to remove embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only.

| Part | Container | Units |
|--------|-----------------------|----------|
| Number | Size | Per Case |
| 14085 | 12 oz aerosol trigger | 12 |



HF™ CONTACT CLEANER

Petroleum distillate-based precision cleaner that offers the safety of a high flash point without leaving a residue. It may be used on most plastic materials. HFTM Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03125 🚺 | 16 oz aerosol | 12 |
| 03126 | 5 gallon pail | 1 |



DUSTER™

Moisture-Free Dust & Lint Remover

Effectively removes dirt, dust, lint and other contaminants with a dry blast of air. Safely eliminates debris from sensitive electronics, appliances and equipment.

| Part | Container | Units |
|--------|-----------------------|----------|
| Number | Size | Per Case |
| 05185 | 16 oz gerosol trigger | 12 |



CONTACT CLEANER & PROTECTANT

High purity precision cleaner that helps make equipment perform like new. Penetrates surface pores, cleans away contaminants and leaves a fine microscopic corrosion resistant film.

| Part Number | | |
|----------------|---------------|----|
| 03140* | 16 oz aerosol | 12 |



FREEZE SPRAY

Aerosol coolant system that instantly freezes surfaces to -60°F, dissipating heat and cooling equipment. Freeze Spray also assists in locating thermal intermittent components, failures and shorts. Safe to use on sensitive components and all surface finishes. Freeze Spray comes with an extension tube for precise application of the product.

| Part | Container | Units |
|--------|-----------------------|----------|
| Number | Size | Per Case |
| 14096 | 12 oz gorgeol trigger | 12 |





^{— 360°} spray valve can be sprayed in the UP or DOWN position.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

18)

PRECISION CLEANERS TECHNICAL INFORMATION

| Product | Type of the of | gartai Contai | he ODC'S | oint Dring Tif | he pielectic | Muntel Safe for site | 5.D.I | , NSF A | VIC dl | Cleaning | strength (tel) |
|---|--|------------------|---------------|----------------|------------------|---------------------------------------|-------|----------|----------------|--------------------------------|----------------|
| Contact Cleaner 2000® | HFC | None | None | Fast | 30,800 | May be harmful to some plastics | Yes | K2 | 730.3 768.4 | 45 | 16 5 55 |
| XT-2000™ Precision Cleaner | HFC/COzol® | None | None | Fast | 30,200 | Safe on most plastics | Yes | K2 | 324.3 | 24 | 16 |
| Contact Cleaner | HFC | None | None | Fast | 27,600 | Yes | Yes | K2 | 0 | <10 | 16 |
| PF Precision Cleaner | HFC | None | None | Fast | 31,500 | Yes | Yes | K2 | 90.6 | 8.5 | 16 |
| Electronic Component Cleaner | HFC/COzol® | None | None | Fast | 30,800 | May be harmful to some plastics | Yes | K2 | 730.3 | 45 | 16 |
| NT™ Precision Cleaner | HFC | None | None | Fast | 30,800 | May be harmful to some plastics | Yes | K2 | 730.3 768.4 | 45 | 16 5 55 |
| QD [®] Contact Cleaner | Petroleum Distillate/Alcohol | None | <0°F TCC | Very Fast | 36,700 30,500 | Yes | Yes | K2 | 495 552 | 27 (aeosol) 29 (bulk) | 16 1 5 55 |
| CE™ Precision Cleaner | HFC | None | None | Slow | 28,400 | Safe on most plastics | Yes | K2 | 221.7 | 16 | 16 |
| Isopropyl Alcohol Precision Cleaner | Alcohol | None | 54°F TCC | Fast | 8,300 | Safe on most plastics | Yes | K1 K2 | 591.7 | >200 | 16 |
| HF™ Contact Cleaner | Petroleum Distillate | None | 204°F PMCC | Slow | 45,700 | May be harmful to some plastics | Yes | K2 | 0 | 25 | 16 5 |
| Contact Cleaner & Protectant | Petroleum Distillate/Alcohol/ Silicone | None | <0°F TCC | Fast | 350 | Safe on most plastics | Yes | K2 | 479.2 | 27 | 16 |
| Duster™ Aerosol Dust Removal System | HFC | None | None | Fast | ND | Yes | No | K2 | 0 | <10 | 12 |
| Duster™ Moisture-Free Dirt & Lint Remover | HFC | None | -58°F TCC | Fast | ND | Yes | No | | 0 | <11 | 16 |
| Freeze Spray | HFC | None | None | Fast | ND | Yes | No | | 0 | <10 | 12 |

ODC = Ozone Depleting Compounds; TCC = Tag Closed Cup; PMCC = Pensky-Martens Closed Cup; ND = Not Determined

SUPER DEGREASER™

Non-chlorinated, non-conductive, non-corrosive, non-staining and with no flash point. Advanced Technology Formula Super Degreaser™ quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Super Degreaser™ evaporates rapidly and leaves no residue. It is an optimal alternative to 1,1,1-Trichloroethane products. Use caution on plastics.

| Part Number | Container Size | Units Per Case |
|--------------------|---------------------------------|-------------------|
| 03910 ³ | 20 oz aerosol (MUO) | 12 |
| 03111 ³ | 1 gallon can | 4 |
| 03112 ³ | 5 gallon pail | 1 |
| 03113 ³ | 55 gallon drum | 1 |
| 03114 ³ | 16 oz non-aerosol can w/trigger | 12 |



T-FORCE® DEGREASER

Utilizes revolutionary technology that combines the power of a high performance, industrial strength degreaser with lower VOCs. T-Force® Degreaser is non-conductive, non-corrosive, non-staining and has no flash point. It quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. T-Force® Degreaser evaporates rapidly, leaves no residue and has a good health and safety profile. Does not contain nPB, TCE or Perc.

| Part Number | Container Size I | Units Per Case |
|----------------|----------------------------------|-------------------|
| 031163 | 1 gallon bottle | 4 |
| 031173 | 5 gallon pail | 1 |
| 031183 | 55 gallon drum | 1 |
| 039153 | 20 oz aerosol (PowerJet® MUO) | 12 |
| 039163 | 20 oz aerosol (Non-flammable MUC |)) 12 |



SUPER DEGREASER PLUS

Non-chlorinated, non-conductive, non-corrosive, non-staining and with no flash point. High cleaning strength quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Evaporates quickly and leaves no residue.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 031091 | 20 oz aerosol | 12 |



MECH FORCE™ Industrial Degreaser

An innovative, non-chlorinated, heavy duty degreaser that removes oil, grease and other contaminants. This fast evaporating solvent is excellent for use where rapid turn-around is necessary and low flash point solvents can be used. It offers a high permissible exposure limit.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 031511 | 20 oz aerosol | 12 |



HEAVY DUTY DEGREASER

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances to increase operating efficiency of equipment. Heavy Duty Degreaser offers quick and efficient degreasing action and fast evaporation with no residue and no flash point. Use caution on plastics.

| Part Number | Container Size | Units Per Case |
|---------------------|--------------------------|-------------------|
| 03095 ¹ | 20 oz aerosol | 12 |
| 03095T ¹ | 20 oz aerosol w/ trigger | 12 |
| 03995^{3} | 20 oz aerosol (MUO) | 12 |
| 03096^{3} | 1 gallon bottle | 4 |
| 03097^{3} | 5 gallon pail | 1 |
| 03098 ³ | 55 gallon drum | 1 |





- 1 Item restricted from sale in some states and counties. See product page on CRC website for specific restrictions.
- $3-\mbox{Not}$ for retail sale, for use in manufacturing establishments only.

QUICK CLEAN™

Safety Solvent and Degreaser

Effective heavy duty degreaser provides strong degreasing action, fast evaporation and no residue. It is non-flammable, does not contain VOCs, and contains no Class I or Class II Ozone Depleting Chemicals. Use caution on plastics and paints. Test on a small area before use.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 03180¹ | 20 oz aerosol | 12 |
| 03183 ³ | 5 gallon pail | 1 |
| 03184 ³ | 55 gallon drum | 1 |



CITRUS DEGREASER

A unique heavy duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash off and without leaving a residue. Use caution on plastics and paints.

| Part Number | Container Size | Units Per Case |
|--------------------|---------------------------------|-------------------|
| 14170 🕡 | 20 oz aerosol | 12 |
| 14970 ³ | 20 oz aerosol (MUO) | 12 |
| 14171 ³ | 16 oz non-aerosol can w/trigger | 12 |
| 14172 ³ | 1 gallon bottle | 4 |
| 14173 ³ | 5 gallon pail | 1 |
| 14174 ³ | 55 gallon drum | 1 |



HEAVY DUTY DEGREASER II

An excellent alternative for cleaning applications where chlorinated solvents are not acceptable. Heavy Duty Degreaser II effectively removes soils and cleans surfaces without residue build-up. Use caution on plastics.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03120 | 20 oz aerosol | 12 |
| 03121 | 1 gallon bottle | 4 |
| 03122 | 5 gallon pail | 1 |
| 03123 | 55 gallon drum | 1 |



NATURAL DEGREASER™

Citrus Based Degreaser

Specially formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Natural Degreaser™ contains no Class I or Class II Ozone Depleting Chemicals or chlorinated solvents. Use caution on plastics and paints.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 14005 | 20 oz aerosol | 12 |
| 14007¹ | 5 gallon pail | 1 |
| 14008 ¹ | 55 gallon drum | 1 |



SUPER-SOY™ DEGREASER

A unique, biodegradable, heavy duty degreaser extremely effective in dissolving and removing grease, oil, lubricants, adhesives and tar. Specially formulated with soy bean and corn-based solvents, which are renewable resources that conserve non-renewable resources such as petroleum.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03135 | 20 oz aerosol | 12 |



GASKET REMOVER

Paint and Decal Remover

Solvent-based, high strength cleaner that removes bakedon fiber gaskets, gasket adhesives and sealants. Dissolves and aids removal of paints, lacquers, and varnish. Removes graffiti from metal and stone.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03017 | 16 oz aerosol | 12 |



INSTA-SOLV® DEGREASER

An extremely low VOC content, non-chlorinated degreaser for use in industrial and electrical applications. Its fast evaporating formula aggressively dissolves grease, dirt, and oils from most non-plastic surfaces.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03100* | 20 oz aerosol | 12 |



^{1 -} Item restricted from sale in some states. See product page on CRC website for specific restrictions.



 $^{3-\}mbox{Not}$ for retail sale, for use in manufacturing establishments only.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

CHLOR-FREE® DEGREASER

Innovative heavy duty non-chlorinated degreasing solvent that removes oil, grease and other contaminants. Excellent for use where rapid turn-around is necessary and low flash point solvents can be used. Use caution on plastics.

| Part Number | Container Size | Units Per Case |
|----------------|-----------------------------|-------------------|
| 031851* | 20 oz aerosol | 12 |
| 039853* | 20 oz aerosol (MUO) | 12 |
| 031873* | 5 gallon pail | 1 |
| 031883* | 55 gallon drum | 1 |
| 031893* | 16 oz non-aerosol w/trigger | 12 |



FOAMING COIL CLEANER

High performance, heavy duty foaming detergent designed to clean evaporator and condenser coils. The aggressive alkaline detergent blend quickly cuts through dirt, grease, oil and other types of residue. A low odor formula that does not require rinsing in most coil cleaning applications.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 03196 🚺 | 20 oz aerosol | 12 |



BATTERY CLEANER

Water soluble formula designed to remove corrosion quickly and economically while neutralizing acid spills. Use to restore battery output and reduce voltage leakage due to contaminants.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03176 | 12 oz aerosol | 12 |



INDUSTRIAL ADHESIVE REMOVER

Ideal for removing adhesive residue, tar, wax or other contaminants. Its penetrating formula can help remove stubborn labels and tape from multiple surfaces. VOC compliant in all $50 \text{ states}^{\infty}$.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03250 | 20 oz aerosol | 12 |
| 03251 | 1 gallon bottle | 4 |



COIL CLEANER

A versatile, chlorinated solvent-based cleaner that is extremely effective in removing grease and dirt on air conditioning and refrigeration coils. It aggressively dissolves grease, oil, and sludge for more efficient operation of mechanical equipment. Coil Cleaner evaporates quickly, and is non-corrosive, non-conductive, and non-staining.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03195 | 20 oz aerosol | 12 |



CARB & CHOKE CLEANER

Low VOC formula designed to maximize carburetor performance, improve fuel system performance and ensure maximum fuel economy.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03077* | 16 oz aerosol | 12 |



CRC Graffiti Remover is a solvent-based, high strength cleaner that removes vandal marks from different types of surfaces. It quickly dissolves and aids in the removal of paints, pen marks, crayon, ink, lipstick, scuff marks, lacquers, and varnishes. CRC Graffiti Remover contains no methylene chloride.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03194 | 16 oz aerosol | 12 |





 ∞ – As defined by Consumer Products VOC regulations.

^{1 -} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

^{3 -} Not for retail sale, for use in manufacturing establishments only.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

| P | Product | Type of Cite | clearin | edit MEN FRESH POIN | Dring in | disectic in M | Otor Otor | nc all | NSF | Aegistration S.D. | Contained Size |
|----------------|-------------------------------------|--|-------------|---|----------|----------------------------|----------------|--|-------------------|----------------------|----------------|
| De | Super egreaser™ | Halogenated | 125 | None | Fast | 26,800 | Strong | 1300 (bulk) 1265 (MUO) | K1 K2 (MU0) | Yes | 20 16 1 5 55 |
| Deg | Super greaser Plus | HFC | 100 | None | Fast | 26,000 | Strong | 703.2 | N/A | Yes | 20 |
| H ₀ | eavy Duty Degreaser | HFC/DCE | 105 | None | Fast | 39,200 | Moderate | 123.2 (aerosol) 126.4 (bulk) 123.2 (MUO) | K1 | Yes | 20 20 1 5 55 |
| | T-Force® Degreaser | HFC/COzol® | 97 | None | Fast | 39,000 | Faint Ethereal | 541.0 (aerosol) 1084.6 (bulk) 1042.5 (MUO) | K1 | Yes | 20 20 1 5 55 |
| Qu | ick Clean™ | Chlorinated | 95 | None | Fast | 37,500 | Moderate | 0 | K1, K2 | Yes | 20 5 55 |
| Me | ech Force™ | Blend of Organic Solvents | >200 | <0°F | Fast | 6,600 | Moderate | 368 | K1 | Yes | 20 |
| D | Citrus Degreaser | d-Limonene & Petroleum Distillate | 32 54 | 170°F TCC (aerosol) 110°F (bulk) 100°F (MUO) | Slow | 58,600 (aerosol) 35,000 | Light Citrus | 79.4 (aerosol) 820 (bulk) 790 (MUO) | C1 | Yes | 20 16 1 5 55 |
| | Natural egreaser™ | Terpene/ Glycol Ether | >200 111 | 150°F TCC (aerosol) 172°F (bulk) | Slow | 28,600 (aerosol) 45,700 | Citrus | 89.8 (aerosol) 35.2 (bulk) | C1 | Yes | 20 5 55 |
| | Gasket Remover | Organic Solvents | NA | 56°F TCC | Moderate | NA | Moderate | 352.4 | C3 | Yes | 16 |
| | eavy Duty egreaser II | Petroleum Distillate/ Glycol Ether | 75 | 185°F TCC | Slow | 42,100 | Moderate | 0 | K1 K2 | Yes | 20 1 5 55 |
| | ıper-Soy™ Degreaser | Methyl Ester | ND | 84°F TCC | Slow | 18,900 | Mild | 73.3 | K1 | Yes | 20 |
| | nsta-Solv [®] Degreaser | Organic Solvents | 112 | <0°F TCC | Fast | 6.3 KV AC | Moderate | 21.3 | K1 | Yes | 20 |
| | hlor-Free [®] Degreaser | Blend Of Organic Solvents | 106 | <0°F TCC | Fast | 6,000 (aerosol) 20,800 | Moderate | 333 (aerosol) 767 (bulk) 736 (MUO) | K1, K2 | Yes | 20 16 5 55 |
| | Battery Cleaner | Aqueous | NA | None | Moderate | NA | Low | 82.16 | | Yes | 12 |
| | Graffiti Remover | Organic Solvents | ND | 56°F | Moderate | NA | Moderate | 352.4 | C3 | Yes | 16 |
| Co | oil Cleaner | Chlorinated | 105 | None | Fast | 39,200 | Strong | 123.2 | | Yes | 20 |
| | aming Coil Cleaner | Aqueous | NA | None | Slow | NA | Low | 113.4 | C1 A1 | Yes | 20 |
| | ndustrial sive Remover | Petroleum Distillate | 75 | 185°F | Slow | 42,100 | Moderate | 0 | K3 | Yes | 20 1 |
| Ca | rb & Choke Cleaner | Organic Solvents | >200 | <0°F TCC | Fast | 6,300 | Moderate | 70.2 | | Yes | 16 |

TCC = Tag Closed Cup; NA = Not Applicable; KB = Kauri Butanol; ND = Not Determined

 $[\]infty$ – VOC g/L as defined by Consumer Products VOC regulations

HYDROFORCE® INDUSTRIAL STRENGTH DEGREASER

Aqueous degreaser with the powerful performance of a solvent. Upon contact, HydroForce® Industrial Strength instantly begins to hunt-down, break-up and lift-off heavy deposits of grease, oil and dirt. It exhibits a unique spreadability that cleans up to four times the surface area of competitive products. Perfect for facilities seeking an alternative to traditional solvents.

| Container Size | Units Per Case |
|----------------------------|---|
| 20 oz aerosol | 12 |
| 32 oz trigger spray bottle | 12 |
| 1 gallon bottle | 4 |
| 5 gallon pail | 1 |
| 55 gallon drum | 1 |
| | Size 20 oz aerosol 32 oz trigger spray bottle 1 gallon bottle 5 gallon pail |



HYDROFORCE® BUTYL-FREE ALL PURPOSE CLEANER

Butyl-free cleaner that is versatile enough for all of your cleaning tasks, but strong enough to attack and remove tough dirt, dust and grime deposits. HydroForce® Butyl-Free outcleans many competing aqueous cleaners containing butyl. Perfect for facilities seeking an efficacious all-purpose cleaner with maximum regulatory compliance.

| | Part Number | Container Size | Units Per Case |
|---|----------------|----------------------------|-------------------|
| 1 | 14405 | 20 oz aerosol | 12 |
| | 14401 | 32 oz trigger spray bottle | 12 |
| | 14402 | 1 gallon bottle | 4 |
| | 14404 | 55 gallon drum | 1 |



HYDROFORCE® 5

Versatile enough to use for all degreasing tasks. HydroForce® All Purpose breaks-up and lifts-off grease, oil and dirt deposits. HydroForce® All Purpose exhibits a unique spreadability that cleans up to three times the surface area as competing aqueous degreasers. Perfect for facilities seeking an improvement over their current all-purpose aqueous degreaser.

ALL PURPOSE DEGREASER

| Part Number | Container Size | Units Per Case |
|----------------|----------------------------|-------------------|
| 14406 | 20 oz aerosol | 12 |
| 144071 | 32 oz trigger spray bottle | 12 |
| 14408 | 1 gallon bottle | 4 |
| 14409 | 5 gallon pail | 1 |
| 14410 | 55 gallon drum | 1 |
| 14421 | 275 gallon tote | 1 |

HYDROFORCE® GLASS CLEANER Professional Strength

Versatile enough to use on your most delicate glass surfaces, but strong enough to quickly cut through the toughest dirt, dust, fingerprint and haze deposits without streaking. Its ammonia-fortified formula contains a foaming agent for greater coverage and less run-off when cleaning vertical surfaces. HydroForce® Glass Cleaner is nearly twice as effective at eliminating streaks as other leading

| Part Number | Container Size | Units Per Case |
|----------------|----------------------------|-------------------|
| 14412 | 20 oz aerosol | 12 |
| 14411 | 32 oz trigger spray bottle | 12 |
| 1//27 | 55 gallon drum | 1 |



HYDROFORCE® ZERO VOC

General Purpose Cleaner

Provides maximum regulatory compliance without performance compromises. It is strong enough to attack and remove tough dirt, dust and grime deposits; yet its moderate pH formula, biodegradability and zero VOC content make it versatile and safe enough to use daily for all your cleaning tasks. Formulated with a special polymer that keeps dirt and greasy soils from returning to surfaces.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------------|-------------------|
| 14446 | 32 oz trigger spray bottle | 12 |
| 14447 | 1 gallon bottle | 4 |
| 14449 | 55 gallon drum | 1 |



^{1 –} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

HYDROFORCE® SUPER CITRUS™

Heavy Duty Degreaser

Naturally formulated degreaser that offers the superb cleaning power of citrus. HydroForce® Super Citrus™ dissolves grease, oil, ink, tar, asphalt and many other industrial residues.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 14440 | 20 oz aerosol | 12 |
| 14441 | 1 gallon bottle | 4 |
| 14442 | 5 gallon pail | 1 |
| 14443 | 55 gallon drum | 1 |



HYDROFORCE® FOAMING CITRUS ALL PURPOSE CLEANER

Rich, foamy, aqueous-based cleaner with a citrus scent. HydroForce® Foaming Citrus clings to tough, stubborn stains on vertical or inverted surfaces without runs or drips. Its foaming action instantly begins to lift-off and eliminate dirt, dust, ink and grime deposits.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 14400 | 20 oz aerosol | 12 | |



HYDROFORCE® GERMICIDAL FOAM CLEANER

Cleans, disinfects and deodorizes in one easy step. The rich, foamy aqueous based formula clings to vertical or inverted surfaces without runs or drips. HydroForce® Germicidal Foam Cleaner contains powerful cleaning agents that instantly lift off and eliminate dirt, dust, grease and grime. For sale in US, Puerto Rico and Mexico only.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 14430 | 20 oz aerosol | 12 | |



HYDROFORCE® STAINLESS STEEL CLEANER & POLISH

Using an exclusive ultra shine formula, HydroForce[®] Stainless Steel Cleaner & Polish eliminates dirt, dust, fingerprints and watermarks and leaves behind a protective, non-greasy barrier that resists the return of these stains. Created specifically for industrial applications, Stainless Steel Cleaner is formulated with powerful cleaning agents designed to out-clean, out-shine and out-perform competing janitorial stainless steel cleaners.

| Part | Container | Units | |
|---------|---------------|----------|--|
| Number | Size | Per Case | |
| 1/1/2/1 | 20 oz aerosol | 12 | |



VISICLEAR® DISPLAY & ELECTRONIC SCREEN CLEANER

Safely cleans TFT, LCD, Plasma, CRT and Touch Screens. This unique foam cleaner clings, won't drip, and is alcohol and ammonia free. Product is applied with a clean microfiber cloth or sprayed directly onto the display surface.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05131 | 8 oz aerosol | 12 |



HYDROFORCE® FOAMING DEGREASER

A rich, foamy, aqueous based degreaser that removes dirt, dust, grease, ink and grime with a powerful cleaning agent that clings to vertical or inverted surfaces without runs or drips. It is aggressive enough to remove rubber marks but remains gentle enough for use on painted and plastic surfaces.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 14428 | 20 oz aerosol | | |



DRAIN MAINTENANCE

HYDROFORCE® DRAIN MAINTAINER

Natural, non-toxic, non-pathogenic bacteria formula helps keep drains clear. Consumes oils and greases to keep drains flowing free when used on a regular basis. This industrial strength, ready to use formula is safe and easy to dose. It uses natural microbes to consume waste.

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| 14130 | 1 gallon bottle | |



HYDROFORCE® DRAIN RE-NU™

A fast acting alkaline based drain cleaner. Quickly acts to unclog drains and is completely soluble in water. Easy to measure tip & pour spout makes certain you are dosing the correct amount for maximum effectiveness. Formula is non-fuming, non-toxic, low odor, and non-acid. Works through standing water.

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| 14125 | 1 gallon bottle | 4 |



| HydroForce® Industrial Strength Degreaser | Alkaline H ₂ 0 Surfactant | 13.2 (aerosol) 13.1 (bulk) | C1 | Rest Point Rose | Hindent ad | Ottot Pleasant | Cartifate site |
|--|--|--|--------|--|-------------------------------|-----------------------|------------------|
| HydroForce [®] All Purpose Degreaser | H ₂ O Surfactant | 10.7 (aerosol) 10 (bulk) | C1 | None | Yes | Pleasant | 20 32 1 5 55 275 |
| HydroForce® Zero VOC General Purpose Cleaner | H ₂ O Surfactant | 10.3 | A1 | None | Yes | Mild | 32 1 55 |
| HydroForce [®] Butyl-Free All Purpose Cleaner | H₂O Surfactant | 11 (aerosol) 10.5 to 12.2 (bulk) | A1, C1 | None | Yes (aerosol) | Pleasant | 20 32 1 55 |
| HydroForce [®] Super Citrus™ Heavy Duty Degreaser | Solvent in H ₂ O Emulsion (aerosol) Solvent Based Dilutable in H ₂ O (bulk) | 10 (aerosol) | C1 | None (aerosol) 190°F TCC (bulk) | No (bulk) Yes (aerosol) | Citrus | 20 1 5 55 |
| HydroForce® Glass Cleaner Professional Strength | H₂O Surfactant | 10.5 (aerosol) 10 (bulk) | C1 | None | Yes | Ammonia | 20 32 55 |
| HydroForce [®] Germicidal Foam Cleaner | H₂O Surfactant | 11.8 to 12.8 | C1 | None | No | Floral/ Ammonia | 20 |
| HydroForce [®] Foaming Citrus All Purpose Cleaner | H ₂ O Surfactant | 10.9 | C1 | None | Yes | Citrus | 20 |
| HydroForce® Stainless Steel Cleaner & Polish | Solvent/Oil in H ₂ O Emulsion | 10.5 | C1 | None | No | Slight Petroleum | 20 |
| HydroForce [®] Foaming Degreaser | H ₂ O Surfacant | 9.1 | C1 | None | No | Mild | 20 |
| VisiClear® Display Cleaner | H₂O Surfactant | 9 to 10 | No | None | No | Odorless | 8 |
| HyrdroForce [®] Drain Re-Nu™ | H ₂ O Alkaline | 14 | No | >200°F | No | Ammonia | |
| HyrdroForce [®] Drain Maintainer | H ₂ O Microbial/ Surfactant | 8 | No | >200°F | Yes | Pleasant | 1 |
| = Tag Closed Cup | The state of the s | | | | | | FÖRC |

PENETRATING

KNOCK'ER LOOSE®

Penetrating Solvent

An industrial strength, low viscosity lubricant and penetrant designed to quickly loosen and free seized, bound or frozen fasteners. It quickly dissolves rust, scale, gum, grease and corrosion with a formula that creeps into cracks, seams, threads and joints better than the competition. Knock'er Loose® eases the disassembly of machinery, tools and equipment for routine maintenance and emergency repairs.

| Part Number | Container Size | Units Per Case |
|----------------|---------------------------------|-------------------|
| 03016 🚺 | 6 oz aerosol | 12 |
| 03020 🚺 | 16 oz aerosol | 12 |
| 03021 | 1 gallon bottle | 4 |
| 03022 | 5 gallon pail | 1 |
| 03023 | 55 gallon drum | 1 |
| 03024 | 16 oz non-aerosol can w/trigger | 12 |
| 03025 | 8 oz spout can | 24 |



A unique penetrant that immediately drops the temperature of the area in contact with the spray. The freeze shock action cracks rusted surfaces allowing Knock'er Loose® Plus to reach deeper and work more effectively than other penetrants.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 03027 🗘 * | 20 oz aerosol | 12 |

SCREWLOOSE® SUPER PENETRANT


Screwloose® quickly penetrates through rust and corrosion to rapidly free corroded bolts, screws, fasteners, pins and bound mechanisms. Eases disassembly of mechanical equipment, fittings and fixtures.


| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03060 🕕 | 16 oz aerosol | 12 |
| 03062 | 1 gallon bottle | 4 |

4106





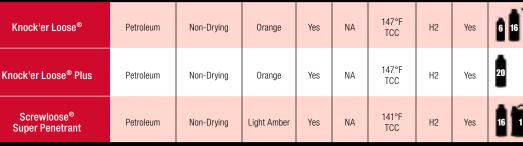



Product

 Ω – 360° spray valve can be sprayed in the UP or DOWN position.

MULTI-PURPOSE

3-36®

Multi-Purpose Lubricant and Corrosion Inhibitor

Multi-purpose lubricant, penetrant and corrosion inhibitor forms a clear, thin film that lubricates, prevents corrosion, displaces moisture and penetrates. 3-36® drives out moisture and leaves a thin, long lasting film to protect against corrosion.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------|-------------------|
| 03004 🚺 | 6 oz aerosol | 12 |
| 03005 🚺 | 16 oz aerosol | 12 |
| 03007 | 16 oz trigger bottle | 12 |
| 03006 | 1 gallon bottle | 4 |
| 03009 | 5 gallon pail | 1 |
| 03011 | 55 gallon drum | 1 |



ULTRA-LITE 3-36®

An ultra-thin, non-staining dry film lubricant that resists oil, dust and dirt build-up. Penetrates into the most minute openings, sealing out moisture and preventing corrosion with an ultra-light protective film.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03160 🕡 | 16 oz aerosol | 12 |
| 03161 | 1 gallon bottle | 4 |
| 03162 | 5 gallon pail | 1 |
| 03163 | 55 gallon drum | 1 |








Container





TYPE

INDUSTRIAL SILICONE

Multi-purpose silicone spray for industrial applications. It forms a colorless, odorless, non-staining film that lubricates and protects in most metal-to-non-metal applications. Silicone film eliminates binding and sticking, while protecting surfaces.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 03032 🚺 * | 16 oz aerosol | 12 |



ROLL-UP DOOR LUBRICANT

Superior lubricant that prevents friction and wear on all roll-up and overhead door assemblies. Its unique viscosity allows it to cover more surface area and penetrate deep into the surface of all metal components found in roll-up and overhead doors. Roll-Up Door Lubricant displaces moisture and leaves a thin, long-lasting film to protect against rust and corrosion.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 03029 | 16 oz aerosol | 12 | |



TECHNICAL GRADE 3-36®

Multi-Purpose Precision Lubricant

Multi-purpose, plastic safe lubricant, penetrant and corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. Technical Grade 3-36® drives out moisture and leaves a thin, long lasting film to protect against corrosion. Excellent for use around modern plastics and insulators.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 03003 🕡 | 16 oz aerosol | |





DRY PTFE LUBE

A multi-purpose, micro-thin film containing PTFE. Dry PTFE Lube penetrates and bonds to most surfaces including metal, wood, rubber, plastic and glass. It forms a micro-thin film that prevents sticking, reducing friction and wear.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03044 | 16 oz aerosol | 12 |





ontainer sir

| Product | THE | Type of | Color | 380, 2 | Falex | Flash | NSF AL | S.D.L. | Contain |
|--------------------------------------|-----------|-----------------|----------------------|--------|-------|--------------|--------|--------|----------------|
| 3-36 [®] | Petroleum | Non-Drying | Blue-Green | Yes | 1000 | 192°F TCC | H2 | Yes | 6 16 16 1 5 55 |
| Ultra-Lite 3-36 [®] | Petroleum | Dry, Ultra-Thin | Amber | Yes | 1000 | 172°F TCC | H2 | Yes | 16 1 5 55 |
| Industrial Silicone | Silicone | Dry | Clear Water-White | Yes | NA | <0°F | H1 | Yes | 16 |
| Technical Grade 3-36 [®] | Petroleum | Non-Drying | Amber | Yes | 1500 | 200°F TCC | H2 | Yes | 16 |
| Dry PTFE Lube | PTFE | Dry, Micro-Thin | White | No | NA | <20°F TCC | H2 | Yes | 16 |
| Roll-Up Door Lubricant | Petroleum | Non-Drying | Blue-Green | Yes | 1000 | 192°F TCC | H2 | Yes | 16 |

TCC = Tag Closed Cup; NA = Not Applicable

^{■ – 360°} spray valve can be sprayed in the UP or DOWN position.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

FOOD GRADE: NSF® H1 REGISTERED

FOOD GRADE SILICONE

Multi-purpose silicone spray for food processing and handling applications. It forms a colorless, odorless, non-staining film that lubricates and insulates in most metal to non-metal applications. Silicone film eliminates binding and sticking. while protecting most surfaces.

| Part Number | | | | |
|----------------|-------------------------------|----|--|--|
| 030393* | 16 oz non-aerosol trigger can | 12 | | |
| 03040* | 16 oz aerosol w/Perma-Lock® | 12 | | |
| 030413* | 5 gallon pail | 1 | | |
| 030423* | 55 gallon drum | 1 | | |



FOOD GRADE MACHINE OIL

Extremely efficient and effective general purpose lubricant for use on food processing equipment. Food Grade Machine Oil penetrates and loosens rust, scale, dirt and corrosion to free parts and fasteners.

| Part | Container | Units |
|--------|-----------------------------|----------|
| Number | Size | Per Case |
| 03081 | 16 oz aerosol w/Perma-Lock® | 12 |



FOOD GRADE PENETRATING OIL

An effective and efficient general purpose penetrant for use on food processing equipment. The highly refined white mineral oil is colorless, odorless and tasteless to meet NSF and FDA standards. Food Grade Penetrating Oil can be used to loosen rust, scale and corrosion around fasteners and hose fittings on food processing equipment.

| Part Number | Container Size | Units Per Case |
|----------------|-----------------------------|-------------------|
| 03086 | 16 oz aerosol w/Perma-Lock® | 12 |
| 03087 | 1 gallon bottle | 4 |
| 03088 | 5 gallon pail | 1 |
| 03089 | 55 gallon drum | 1 |
| | | |



FOOD GRADE WHITE GREASE

A high purity, high quality aluminum complex grease that provides superior lubrication and durability in many food and pharmaceutical processing applications. Designed for heavy load applications requiring a long grease life. Protects equipment against rust, oxidation and wear.

| Part | Container | Units |
|--------|-----------------------------|----------|
| Number | Size | Per Case |
| 03038* | 16 oz aerosol w/Perma-Lock® | 12 |



SYNTHA-TECH™ **LUBRICANT WITH PTFE**

A non-flammable, zero VOC[∞], unique blend of synthetic lubricants that utilizes PTFE, anti-wear and extreme pressure additives to increase equipment life and performance. This food grade synthetic lubricant is NSF H1 Registered for use in meat and poultry facilities. Additionally, its long lasting film minimizes surface contact thereby extending lubricating intervals.

| Part Container | | Units | |
|----------------|-----------------------------|----------|--|
| Number Size | | Per Case | |
| 03054 | 16 oz aerosol w/Perma-Lock® | 12 | |



FOOD GRADE CHAIN LUBE

A special blend of synthetic lubricants and mineral oil, designed to keep roller drive and conveyor chains lubricated. It is specifically designed to provide the convenience of aerosol application where incidental food contact may occur. Food Grade Chain Lube penetrates, lubricates and protects moving parts by reducing friction and wear.

| Part Number | | |
|----------------|-----------------------------|----|
| 03055 | 16 oz aerosol w/Perma-Lock® | 12 |



FOOD GRADE BELT DRESSING

Provides a temporary, food grade, synthetic treatment for worn belts. Extends belt life by reducing slippage, hardening, glazing, dirt build-up and friction. Belt Dressing can be used on leather, rubber, canvas or fabric, and is ideally suited for flat, round and V-belts. Improves traction and reduces belt tension, relieving stress on motors, shafts and wheels for improved operating efficiency.

| Part Number | | |
|----------------|-----------------------------|----|
| 03065* | 16 oz aerosol w/Perma-Lock® | 12 |



WATER BASED SILICONE

Non-flammable, NSF H1 Registered multi-purpose silicone spray for food processing and handling applications. It forms a white emulsion that is odorless and non-staining. It lubricates and protects in most metal to non-metal applications. Water Based Silicone is a silicone rich formula that eliminates binding and sticking, while protecting most surfaces.

| Part | Container | Units |
|--------|-----------------------------|----------|
| Number | Size | Per Case |
| 03035 | 16 oz aerosol w/Perma-Lock® | 12 |





PREVENTION. NOT DETECTION.®

LOCKED IN FOR SAFETY INTEGRATED DESIGN POINTS:

- Secure Spray Straw Locks into Place
- Convenient No-Slip Grip
- Useful Catch Curb
- Wide Spray in the "Down"
- Precision Spray in the "Up" Position

^{3 -} Not for retail sale, for use in manufacturing establishments only.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

FOOD GRADE DIELECTRIC GREASE

Lubricates, waterproofs and insulates with a thin, non-curing silicone compound. Dielectric Grease also provides an exceptional lubricant for fasteners used to support temporary electrical work. Excellent for lubricating and sealing rubber and plastic parts — including o-rings. Great for use in food processing environments where there may be a chance of incidental food contact.

| Part | Container | Units | |
|--------|-----------------------|----------|--|
| Number | Size | Per Case | |
| 03085 | 6 oz pressurized tube | 12 | |

FOOD GRADE AIR TOOL OIL

A fully synthetic food grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2300 | 1 quart bottle | 6 |
| 04258 | 5 gallon pail | 1 |



| Product | (He | Wedfill | Calai | Perfection | ed Figet Point | NSF RE | Jistation S.D.L. | Contrainer size |
|-------------------------------------|----------------------|----------------------------------|----------------|------------|-------------------------------|--------|---------------------|--|
| Food Grade Silicone | Silicone | Dry Non- Hardening | Clear | Yes | <0°F TCC | H1 | Yes | |
| Food Grade Machine Oil | Mineral Oil | Non-Drying | Clear | Yes | 200°F TCC | H1 | Yes | 16 16 5 55 |
| Food Grade Penetrating Oil | Mineral Oil | Non-Drying | Clear | Yes | 200°F TCC | H1 | Yes | 16 1 5 55 |
| Food Grade White Grease | Synthetic | Non-Drying Grease | White | Yes | 20°F TCC | H1 | Yes | 16 |
| Syntha-Tech™ Lubricant with PTFE | Polyolefin/ PTFE | Non-Drying | White | Yes | 253°F (seta) | H1 | Yes | 16 |
| Food Grade Chain Lube | Mineral Oil | Non-Drying Ultra-Thin Oily | Clear | Yes | >370°F COC | H1 | Yes | 16 5 55 |
| Food Grade Belt Dressing | Polyisobutene | Tacky | Light Amber | Yes | <0°F | H1 | Yes | 16 |
| Water-Based Silicone | Silicone | Non-Drying | White | Yes | None | H1 | Yes | 16 |
| Food Grade Dielectric Grease | Silicone | Grease | White | No | >572°F TCC | H1 | Yes | GREGINATION OF THE PROPERTY OF |
| Food Grade Air Tool Oil | Polyalphaolefin | Non-Drying | Clear | No | 473°F (quart) 464°F (pail) | H1 | No | 15 |
| TCC = Tag Closed Cup; COC = | : Cleveland Open Cup | 1 | | | | | | |

FOOD GRADE: NSF® H1 REGISTERED

FOOD GRADE AIR TOOL OIL

A full synthetic food grade oil formulated with high quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment. Formulated with high performance antioxidants and anti-wear additives to meet the challenges of industrial environments.

| ISO Grade | Product # | Container Size |
|-----------|-----------|----------------|
| 20 | SL2300 | 1 quart |
| 32 | 04258 | 5 gallon |
| | | |



FOOD GRADE SYNTHETIC COMPRESSOR OIL

High quality PAO base oils are used to provide long life in compressors. Typically 6,000 plus service hours in rotary screw compressors.

| ISO Grade | Product # | Container Size | |
|-----------|-----------|----------------|--|
| 32/46 | 04202 | 5 gallon | |
| 32/40 | 04203 | 55 gallon | |
| 68 | 04206 | 5 gallon | |
| 00 | 04207 | 55 gallon | |
| 100 | 04543 | 5 gallon | |
| 100 | 04544 | 55 gallon | |

FOOD GRADE COMPRESSOR FLUSH

For cleaning out system prior to changing oil

A synthetic (PAO) flushing fluid designed to remove varnish and sludge from compressors. It may be used as an intermediary step when transitioning from non-food grade to NSF H1 oils. May be used as a lubricant for up to 500 hours.

| ISO Grade | Product # | Container Size | |
|-----------|-----------|----------------|--|
| 46 | 04584 | 5 gallon | |
| 40 | 04585 | 55 gallon | |

FOOD GRADE REFRIGERATION COMPRESSOR OILS

Custom blended polyalphaolefin synthetic hydrocarbon fluid with additional seal treating properties. Conditions o-rings in ammonia systems and compatible with mineral oils. Applications include ice making machines, cold storage facilities and low temperature ammonia refrigeration systems.

| ISO Grade | Product # | Container Size |
|-----------|-----------|----------------|
| 32 | 04560 | 5 gallon |
| 32 | 04561 | 55 gallon |
| 60* | 04564 | 5 gallon |
| 68* | 04565 | 55 gallon |

^{*}Contains Seal Conditioner

DIRECT FOOD CONTACT WHITE OILS

NSF 3H White Oils are purified mineral oils that are edible, colorless, odorless, and tasteless. These products are useful in coating and release applications.

| ISO Grade | Product # | Container Size | |
|-----------------|----------------|----------------|--|
| Pan Divider Oil | 04590 | 5 gallon | |
| 15 | 04591 | 55 gallon | |
| 22 | 04592 | 5 gallon | |
| | 04593 | 55 gallon | |
| 46 | 04594 | 5 gallon | |
| 40 | 04595 | 55 gallon | |
| 100 | 04596 5 gallon | | |
| 100 | 04597 | 55 gallon | |

FOOD GRADE CHAIN LUBES

High Temp Synthetic PAG Oils are biodegradable and have much higher load and wear properties than H1 White Oils or PAOs.

| ISO Grade | Product # | Container Size | Chain Lubes |
|-----------|-----------|----------------|---|
| 400 | 04261 | 5 gallon | Food Grade Proofer Chain Lube |
| 100 | 04262 | 55 gallon | (USP White Oil) (0 to 375°F) |
| 100 | 04264 | 5 gallon | Food Grade Synthetic Chain Lube |
| 100 | 04265 | 55 gallon | PAO (-5 to 450°F) |
| 100 | 04269 | 5 gallon | Food Grade Chain Lube (Mineral Oil) |
| 100 | 04270 | 55 gallon | (8 to 325°F) |
| 000 | 04267 | 5 gallon | Food Grade |
| 220 | 04268 | 55 gallon | High Temp Synthetic Chain Lube (-5 to 600°F) |
| 100 | 04580 | 5 gallon | Food Grade |
| 130 | 04581 | 55 gallon | Synthetic PAG Chain Oil (-30 to 600°F) |
| 200 | 04582 | 5 gallon | Food Grade |
| 220 | 04583 | 55 gallon | Synthetic PAG Chain Oil (-20 to 600°F) |

FOOD GRADE HYDRAULIC OILS

| ISO Grade | Container Size | Mineral Base Oil | Synthetic PAO |
|-----------|----------------|------------------|---------------|
| 22 | 5 gallon | 04218 | 04545 |
| 22 | 55 gallon | 04219 | 04546 |
| 32 | 5 gallon | 04220 | 04547 |
| 32 | 55 gallon | 04221 | 04548 |
| 46 | 5 gallon | 04222 | 04212 |
| 40 | 55 gallon | 04223 | 04213 |
| 68 | 5 gallon | 04226 | 04216 |
| | 55 gallon | 04227 | 04217 |
| 100 | 5 gallon | 04228 | 04549 |
| 100 | 55 gallon | 04229 | 04550 |
| 150 | 5 gallon | 04230 | |
| 150 | 55 gallon | 04231 | |

FOOD GRADE GEAR OILS

PAG Gear Oils are engineered to provide significantly improved wear, oxidation, and lubricity versus PAO and mineral based gear oils. Typical industrial applications include sperm helical, bevel, and worm gears.

| ** | | | | |
|-----------|----------------|------------------|---------------|--------------------------------|
| ISO Grade | Container Size | Mineral Base Oil | Synthetic PA0 | High Performance Synthetic PAG |
| 150 | 5 gallon | | 04551 | 04570 |
| 150 | 55 gallon | | 04552 | 04571 |
| 220 | 5 gallon | 04246 | 04232 | 04572 |
| 220 | 55 gallon | 04247 | 04233 | 04573 |
| 220 | 5 gallon | 04250 | 04236 | 04574 |
| 320 | 55 gallon | 04251 | 04237 | 04575 |
| 460 | 5 gallon | 04254 | 04242 | 04576 |
| 400 | 55 gallon | 04255 | 04243 | 04577 |
| 000 | 5 gallon | 04555 | 04553 | 04578 |
| 680 | 55 gallon | 04556 | 04554 | 04579 |

FOOD GRADE BULK LUBRICANTS TECHNICAL INFORMATION

| NSF Reg | gistration | CRC Product Name | P/N | Container Size | ISO Grade | Viscosity@40°C/100°C | Viscosity Index | Flashpoint °F | Pour Point °F | Specific Gravity |
|---------|----------------|----------------------------------|-------|-----------------------|-----------|----------------------|-----------------|---------------|---------------|------------------|
| | | | 04584 | 5 gallon | | | | | | |
| ŀ | 11 | Food Grade Compressor Flush | 04585 | 55 gallon | 46 | 46 / 8.0 | 135 | 518 | -22 | 0.95 |
| | la . | | 04560 | 5 gallon | 20 | 00.0 / 0.0 | 100 | 404 | 00 | 0.00 |
| r | 11 | Food Grade Refrigeration | 04561 | 55 gallon | 32 | 29.6 / 6.3 | 168 | 481 | -90 | 0.83 |
| | 14 | Compressor Oil | 04564 | 5 gallon | 68 | 66.00 / 10.00 | 148 | 500 | -63 | 0.04 |
| Г | 11 | | 04565 | 55 gallon | 08 | 66.98 / 10.98 | 140 | 500 | -03 | 0.84 |
| | 11 | | 04545 | 5 gallon | 22 | 22 / 4.5 | 116 | 465 | -76 | 0.82 |
| | 11 | | 04546 | 55 gallon | 22 | 227 4.5 | 110 | 403 | -70 | 0.02 |
| + | 11 | | 04547 | 5 gallon | 32 | 31.4 / 5.6 | 117 | 465 | -86 | 0.82 |
| | | | 04548 | 55 gallon | 02 | 01.17 0.0 | | 100 | 00 | 0.02 |
| F | 11 | Food Grade Synthetic | 04212 | 5 gallon | 46 | 55 / 9.5 | 127 | 500 | -55 | 0.83 |
| | | Hydraulic Oil | 04213 | 55 gallon | | 007 0.0 | | | | 0.00 |
| F | 11 | | 04216 | 5 gallon | 68 | 82 / 12.5 | 141 | 500 | -55 | 0.84 |
| | | | 04217 | 55 gallon | | | | | | |
| H | 11 | | 04549 | 5 gallon | 100 | 93.6 / 12.9 | 136 | 500 | -44 | 0.84 |
| | | | 04550 | 55 gallon | | | | | | |
| H | 1 1 | | 04551 | 5 gallon | 150 | 147 / 17.6 | 132 | 460 | -35 | 0.85 |
| | | | 04552 | 55 gallon | | | | | | |
| H | 11 | | 04232 | 5 gallon | 220 | 265 / 27.5 | 128 | 504 | -31 | |
| | | - | 04233 | 55 gallon | | | | | | |
| F | 11 | Food Grade Synthetic Gear Oil | 04236 | 5 gallon | 320 | 375 / 35.9 | 132 | 518 | -27 | 0.85 |
| | | eynanodo dodi en | 04237 | 55 gallon | | | | | | |
| F | 1 1 | | 04242 | 5 gallon 55 gallon | 460 | 542 / 46 | 130 | 518 | -17 | 0.85 |
| | | | 04243 | 5 gallon | | | | | | |
| H | 11 | | 04554 | 55 gallon | 680 | 683 / 52 | 130 | 518 | -29 | 0.85 |
| | | | 04570 | 5 gallon | | | | | | |
| F | 11 | | 04571 | 55 gallon | 150 | 150 / 28.99 | 234 | 543 | -40 | 1.05 |
| | | | 04572 | 5 gallon | | | | | | |
| H | 1 1 | | 04573 | 55 gallon | 220 | 220 / 36.8 | 218 | 543 | -40 | 1.05 |
| | | Food Grade | 04574 | 5 gallon | | | | | | |
| H | 11 | Synthetic PAG Gear Oil | 04575 | 55 gallon | 320 | 320 / 53.8 | 233 | 543 | -40 | 1.05 |
| | | | 04576 | 5 gallon | | | | | | |
| F | 11 | | 04577 | 55 gallon | 460 | 460 / 77.3 | 248 | 554 | -32.8 | 1.06 |
| | | | 04578 | 5 gallon | | / | | | | |
| ŀ | 11 | | 04579 | 55 gallon | 680 | 650 / 128.5 | 299 | 554 | -33 | 1.06 |
| | 14 | Food Grade Synthetic | 04580 | 5 gallon | 100 | 120 / 00 | 100 | EF.4 | 00 | 0.00 |
| | 11 | PAG Chain Oil ISO 130 | 04581 | 55 gallon | 130 | 130 / 22 | 198 | 554 | -38 | 0.99 |
| | 11 | Food Grade Synthetic | 04582 | 5 gallon | 220 | 224.3 / 32.8 | 102 | 540 | 20 | 0.00 |
| r | 11 | PAG Chain Oil ISO 220 | 04583 | 55 gallon | 220 | 224.3 / 32.0 | 192 | 540 | -20 | 0.99 |
| | ВН | Pan Divider Oil ISO 15 | 04590 | 5 gallon | 15 | 15 / N/A | 95 to 100 | 360 | -18 | 0.85 |
| | | Tan Erridor Oil 100 To | 04591 | 55 gallon | 10 | 107107 | 00 10 100 | | 10 | 0.00 |
| .9 | ВН | Direct Food Contact | 04592 | 5 gallon | 22 | 20 / N/A | 95 to 100 | 414 | -18 | 0.85 |
| | | White Oil ISO 22 | 04593 | 55 gallon | | 20, | 23.0.00 | | | 0.00 |

FOOD GRADE BULK LUBRICANTS TECHNICAL INFORMATION

| NSF Registration | CRC Product Name | P/N | Container Size | ISO Grade | Viscosity@40°C/100°C | Viscosity Index | Flashp <u>oint °F</u> | Pour Point °F | Specific Gravity |
|------------------|---|-----------------|----------------------|-----------|----------------------|-----------------|-----------------------|---------------|------------------|
| | Direct Food Contact | 04594 | 5 gallon | | | | | | |
| 3H | White Oil ISO 46 | 04595 | 55 gallon | 46 | 46 / N/A 95 to 100 | 95 to 100 | 410 | 5 | 0.86 |
| 011 | Direct Food Contact | 04596 | 5 gallon | 400 | 405 / N/A | 051, 400 | 505.4 | 40 | 0.00 |
| 3H | White Oil ISO 100 | 04597 | 55 gallon | 100 | 105 / N/A | 95 to 100 | 505.4 | 10 | 0.86 |
| H1 | | 04202 | 5 gallon | 32/46 | 33 / 6.2 | 156 | 501 | -58 | 0.85 |
| ПІ | | 04203 | 55 gallon | 32/40 | 33 / 0.2 | 150 | 501 | -56 | 0.65 |
| H1 | Food Grade Synthetic | 04206 | 5 gallon | 68 | 52 / 8.5 | 150 | 501 | -53 | 0.87 |
| | Compressor Oil | 04207 | 55 gallon | 00 | 327 0.0 | 100 | | 00 | 0.07 |
| H1 | | 04543 | 5 gallon | 100 | 98.7 / 14 | 145 | 526 | -48 | 0.85 |
| | | 04544 | 55 gallon | | 5511 7 11 | | | | |
| H1 | Food Grade Multi-Purpose | 04218 | 5 gallon | 22 | 20.8 / 4.2 | 106 | 410 | -49 | 0.87 |
| | Hydraulic Oil (Mineral Oil) | 04219 | 55 gallon | | | | | | |
| H1 | | 04220 | 5 gallon | 32 | 34 / 5.8 | 112 | 420 | -41 | 0.86 |
| | | 04221 | 55 gallon | | | | 420 | -41 | 0.86 |
| H1 | | 04222 | 5 gallon | 46 | 47.3 / 7.2 | 112 | 450 | -31 | 0.88 |
| | | 04223 | 55 gallon | | | | 450 | -31 | 0.88 |
| H1 | Food Grade Hydraulic Oil (Mineral Oil) | 04226 | 5 gallon | 68 | 71.0 / 9.2 | 106 | 500 | -27 | 0.87 |
| | (Milleral Oll) | 04227 | 55 gallon | | | | 500 | -27 | 0.87 |
| H1 | | 04228 | 5 gallon | 100 | 103 / 11.8 | 104 | 505 | -24 | 0.88 |
| | | 04229 | 55 gallon | | | | 505 | -24 | 0.88 |
| H1 | | 04230 | 5 gallon | 150 | 154 / 14.7 | 93 | 505 | -20 | 0.89 |
| H1 | | 04231 SL2300 | 55 gallon 1 Quart | | | | 505 | -20 | 0.89 |
| H1 | Food Grade Air Tool Oil | 04258 | 5 gallon | 32 | 32 / 6.0 | 135 | 464 | 12 | 0.83 |
| 111 | | 04238 | 5 gallon | | | | | | |
| H1 | Food Grade Proofer Chain Lube | 04262 | 55 gallon | 100 | 115 / 17.2 | 158 | 370 | 5 | 0.88 |
| | | 04264 | 5 gallon | | | | | | |
| H1 | Food Grade Synthetic Chain Lube | 04265 | 55 gallon | 100 | 100 / 8.5 | 130 | 460 | -35 | 0.85 |
| | Food Grade High Temperature | 04267 | 5 gallon | | | | | | |
| H1 | Synthetic Chain Lube | 04268 | 55 gallon | 220 | 223 / 26.9 | 154 | 585 | -31 | 0.95 |
| | | 04269 | 5 gallon | | | | | | |
| H1 | Food Grade Chain Lube | 04270 | 55 gallon | 100 | 100 / ND | ND | >370 | ND | 0.87 |
| | Food Grade Gear Oil | 04246 | 5 gallon | | | | | | |
| H1 | SAE 90 | 04247 | 55 gallon | 150 / 220 | 236 / 20.8 | 97 | 374 | 14 | 0.88 |
| | Food Grade Gear Oil | 04250 | 5 gallon | 0.55 | 050 / 55 | 465 | 45. | | 0.65 |
| H1 | SAE 85W-140 | 04251 | 55 gallon | 320 | 356 / 28.3 | 102 | 464 | 10 | 0.88 |
| 114 | Food Grade Gear Oil | 04254 | 5 gallon | 400 | 410 / 04 5 | 400 | 074 | | 0.00 |
| H1 | SAE 140 | 04255 | 55 gallon | 460 | 413 / 31.5 | 103 | 374 | 0 | 0.89 |
| H1 | Food Grade Gear Oil | 04555 | 5 gallon | 680 | 640 / 43 | 111 | 505 | -27 | 0.87 |
| пі | SAE 250 | 04556 | 55 gallon | 060 | 040 / 43 | 111 | 505 | -21 | 0.87 |

HEAVY DUTY

POWER LUBE®

High-Performance Lubricant w/PTFE

High performance, multi-purpose lubricant with the benefits of PTFE to provide long lasting lubrication and protection against friction, wear and corrosion. Power Lube® will increase the life and operating efficiency of parts and equipment, as well as withstand extreme load carrying situations.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03045* | 16 oz aerosol | 12 |



Premium grade silicone fluid that exhibits superior lubrication and temperature viscosity characteristics. Use Extreme Duty Silicone on all metallic and non-metallic surfaces. Clear, non-staining, odorless and reduces friction and galling.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 03030 🕕 * | 16 oz aerosol | 12 |



Silicone Lubricant

Chute Lube® helps boxes glide down chutes and rails on package handling and sorting conveyors. Silicone spray for package handling applications minimizes corrosion and provides excellent lubricity. Its colorless, odorless, nonstaining film lubricates and protects in most metal to nonmetal applications. Eliminates the binding and sticking of packages and boxes, while protecting most surfaces even in wet conditions.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03204* | 20 oz aerosol | 12 |
| 03220 | 16 oz non-aerosol | 12 |
| 03222 | 5 gallon pail | 1 |
| 03223 | 55 gallon drum | 1 |

CHAIN & WIRE ROPE LUBRICANT

Specifically formulated blend of synthetic lubricants and an organic molybdenum, anti-wear additive that penetrates deep, and leaves a tough film that lubricates and protects. Chain & Wire Rope Lube extends the working life of chains and wire rope and reduces wear caused by friction and corrosion.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 030501* | 16 oz aerosol | 12 |













Silicone spray for package handling applications. It forms a colorless, odorless, non-staining film that lubricates and insulates most metal to non-metal applications. Silicone film eliminates binding and sticking of packages, while protecting most surfaces.

| Part | Container | Units |
|--------|-----------------------------|----------|
| Number | Size | Per Case |
| 03139* | 16 oz non-aerosol sprav can | 12 |

EXTREME DUTY OPEN GEAR & CHAIN LUBE

A tough, tacky, solid film lubricant used for reducing friction and wear. It is a heavy-duty compound with exceptional "stay-put" characteristics. It provides maximum lubrication and shock protection, reduces gear noise, lubricates, prevents scoring and welding of gear teeth.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 030581 | 16 oz aerosol | 12 |

HEAVY DUTY CLEAR PENETRATING GREASE

High tack, clear lubricating gel provides superior lubrication and withstands high temperatures and pressures. Penetrates deep to form a tenacious, long-lasting film and is resistant to acids, alkalis, salt, oxidation, weather and steam. This heavy duty clear penetrating gel can extend the operating service life of equipment and reduce wear, galling and scarring.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 030561* | 20 oz aerosol | 12 |

DRY MOLY LUBE

Specially formulated dry film lubricant incorporating a concentrated dispersion of Molybdenum Disulfide (MoS₂). Dry Moly Lube lowers friction, prevents galling and helps to reduce torque and energy consumption.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03084* | 16 oz aerosol | |





^{■ – 360°} spray valve can be sprayed in the UP or DOWN position.

^{1 -} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

OILFIELD DRY MOLY LUBE

Fast drying film resists dirt and dust buildup. Good adhesion and long lasting formula. Lowers friction, prevents galling and helps to reduce torque and energy consumption. High anti-friction and anti-seize properties.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03284* | 16 oz aerosol | 12 |



TAC 2® ADHESIVE CHAIN LUBRICANT

Low viscosity formula provides the ability to penetrate and thoroughly coat vital chain pin and bushing areas. Contains Molybdenum which provides cling-ability to avoid sling-off or excess dripping. High temperature stability (up to 350°F continuous). Blue color allows instant identification of lubricated parts and equipment.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 030761* | 16 oz aerosol | 12 |



DRY GRAPHITE LUBE

A dry film lubricant that is ideal for applications where petroleum products must be avoided. Dry Graphite Lube bonds instantly to metal, rubber, plastic and most substrates to form a dirt repelling barrier that lubricates and protects the surface from pressure and friction. Withstands temperatures up to 850°F and extreme pressures, as well as water and chemical attack.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| Nullibel | 3126 | i ei case |
| 03094* | 16 oz aerosol | 12 |



INNER SLIDE LUBE

Lubricates and increases slide motion, extending forklift equipment life. Fortified with Molybdenum Disulfide and extreme pressure additives. Resists pound out under severe lubrication requirements. Adheres to metal surfaces and protects against rust and corrosion.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 05305* | 16 oz aerosol | 12 |



RED GREASE

Heavy-duty, NLGI Grade 2 aluminum complex based grease that provides superior lubrication and withstands high temperature and high pressure. It penetrates deep to form a tenacious, long lasting thick film. Red Grease is waterproof and resistant to acids, alkalis, salt, oxidation, weather and steam. It can extend the operating service life of equipment and reduce wear, galling and scoring.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03079* | 16 oz aerosol | 12 |



WELDER'S ANTI-SPATTER

Prevents spatter from adhering to surrounding metal surfaces during welding. Eliminates the need to chisel, grind or wire brush after welding. Water-based formula allows easy clean-up without the use of solvent cleaners.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03083 | 16 oz aerosol | 12 |



WHITE LITHIUM GREASE

High-purity, high-quality, NLGI Grade 2 white lithium-based aerosol grease that provides superior lubrication and durability in any weather or temperature. Excellent as a break-in lubricant for bearings, and for general purpose lubrication and corrosion protection of machinery, tools and equipment.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03080* | 16 oz aerosol | 12 |



COPPER ANTI-SEIZE & LUBRICATING COMPOUND

General purpose anti-seize lubricant that prevents seizing and galling caused by high temperature, heavy loads, vibration and corrosion. This unique formula has a smooth texture, fine particle sizing and familiar copper color, making it an excellent choice for closely fitted parts needing extreme lubrication.

| Part Number | Container Size | Units Per Case |
|----------------|------------------------|-------------------|
| SL35901 | 8 oz brush top bottle | 12 |
| SL35903 | 16 oz brush top bottle | 12 |
| 14095* | 16 oz aerosol | 12 |



DIELECTRIC GREASE


Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants.

| Part | Container | Units |
|--------|-----------------------------|----------|
| Number | Size | Per Case |
| 03082* | 16 oz aerosol w/Perma-Lock® | 12 |



^{1 –} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized



LOCK LUBE AND DE-ICER

Long lasting graphite formula lubricates seized and frozen locks allowing for smooth operation.

| Part | Container | Units | |
|--------|--------------|----------|--|
| Number | Size | Per Case | |
| 03119 | 2 oz aerosol | 24 | |



NICKEL ANTI-SEIZE & LUBRICATING COMPOUND

Nickel-based formulation that is free of copper, lead, sulfides and chlorides. Protects metal-to-metal applications from seizing and galling caused by high temperatures, heavy loads, vibration, chemicals and corrosion. Protects parts up to 2400°F.

| Part Number | Container Size | Units Per Case | |
|----------------|------------------------|-------------------|--|
| SL35911 | 8 oz brush top bottle | 12 | |
| SL35913 | 16 oz brush top bottle | 12 | |



THREAD LUBRICANT

A general purpose lubricant that prevents seizing caused by corrosion. Thread Lubricant aids assembly and disassembly, prevents rust and corrosion, and helps reduce costly downtime and breakage. This unique formula has a smooth texture, and fine particle sizing making it an excellent choice for closely fitted parts that need lubrication.

| Part Number | | |
|----------------|-----------------------|----|
| SL35924 | 2 oz tube | 50 |
| SI 35925 | 8 oz brush-ton bottle | 6 |



| NUCLEAR GRADE | ANTI-SEIZE |
|----------------------|------------|
| & LUBRICATING C | COMPOUND |

A premium high temperature lubricant that offers superior protection against rust and corrosion. This product contains chemically-pure nickel flake in an ashless synthetic fluid thickened by water-resistant complex soap and high carbon synthetic graphite, which has the additional benefit at high temperatures of providing lower torques for easy disassembly. Nuclear Grade Anti-Seize contains no copper, lead, sulfur, halogens, or other ingredients that may poison reactor catalyst beds.

| Part | Container | Units |
|----------|------------------------|----------|
| Number | Size | Per Case |
| SI 35921 | 16 oz brush-top bottle | 12 |



FOOD GRADE ANTI-SEIZE & LUBRICATING COMPOUND

A premium quality anti-seize compound developed specifically for use in applications where incidental food contact is possible and is composed entirely of ingredients that meet NSF H1 requirements. This aluminum complex based anti-seize protects metal parts from seizure, galling, rust, corrosion, and heat freeze by tenaciously adhering to the metal surface.

| Part Number | Container Size | Units Per Case |
|----------------|------------------------|-------------------|
| SL35905 | 8 oz brush-top bottle | 12 |
| SL35906 | 16 oz brush-top bottle | 12 |



| Product | -Ne | Type of Film | Calar | _{જુઈઈ} કુર્ય | Fale In Pour | ties Paint | NS Regist | S.D.I | Containet |
|--|------------------------|----------------|-----------------------|-----------------------|--------------|--|-----------|-------|------------|
| Lock Lube and De-Icer | Alcohol/Graphite | Dry | Black | No | NA | 58°F | | No | 2 |
| Power Lube® | Petroleum/ PTFE | Non-Drying | Light Amber | No | 4500 | <20°F TCC | H2 | Yes | 16 |
| Extreme Duty Silicone | Silicone | Dry | Clear | Yes | NA | <0°F TCC | H2 | Yes | 16 |
| Chute Lube® | Silicone | Non-Drying | Clear Light Yellow | No | NA | <0°F TCC (aerosol) 113°F Setaflash (bulk) | H2 | Yes | 16 20 5 55 |
| Chain & Wire Rope Lubricant | Organic Molybdenum | Non-Drying | Clear | No | NA | <0°F TCC | H2 | Yes | 16 |
| Parcel Glide® | Silicone | Non-Drying | Clear | No | NA | <0°F TCC | H1 | Yes | 1 6 |
| Extreme Duty Open Gear & Chain Lube | Petroleum Oil | Tacky | Black | No | NA | >599°F TCC | | Yes | 16 |
| Heavy Duty Clear Penetrating Grease | Petroleum | Oily | Clear | No | NA | <20°F TCC | H2 | Yes | 20 |
| Dry Moly Lube | Organic Molybdenum | Dry | Dark Gray | No | NA | -20°F TCC | | Yes | 16 |
| Oilfield Dry Moly Lube | Organic Molybdenum | Dry | Gray | No | NA | <0°F | | Yes | 16 |
| Dry Graphite Lube | Graphite | Dry | Black | No | NA | -20.2°F PMCC | | Yes | 16 |
| Red Grease | Aluminum | Red Grease | Red | No | NA | <20°F TCC | | Yes | 16 |
| White Lithium Grease | Lithium Stearate | Grease | White | No | NA | <0°F TCC | H2 | Yes | 16 |
| Dielectric Grease | Silicone | Grease | White | No | NA | <20°F TCC (aerosol) | H1 | Yes | 16 |
| TAC 2 [®] Adhesive Chain Lubricant | Hydrocarbon w/ Moly | Soft Film | Blue | No | NA | <0°F TCC | H2 | Yes | 16 |
| Inner Slide Lube | Organic Solvents | Non-Drying | Black | No | NA | 20°F TCC | | No | 16 |
| Welder's Anti-Spatter | Water Based | Non-Drying | White | No | NA | >265°F | | Yes | 16 |
| Copper Anti-Seize | Copper | Non-Drying | Copper | No | NA | >167°F (aerosol) 430°F COC | | Yes | 8 16 16 |
| Nickel Anti-Seize | Nickel | Non-Drying | Silver-Gray | NA | NA | 430°F COC | | No | 8 16 |
| Nuclear Grade Anti-Seize | Synthetic | Non-Drying | Silver-Gray | NA | NA | 430°F COC | | No | 16 |
| Food Grade Anti-Seize | Aluminum Complex | Non- Drying | White | NA | NA | >400°F TCC | H1 | No | 8 16 |
| Thread Lubricant | Lithium | Grease | Amber | NA | NA | 400°F COC | | No | 2 8 |

CORROSION INHIBITORS



SP-250™

Corrosion Inhibitor

Thin-film, water displacing, corrosion inhibitor that will not emulsify, even in the presence of alkali. Use for process parts drying and protection of all metals, protection for parts subjected to high humidity conditions, anti-corrosion coating for shrink wrapped parts, and moisture displacement for finished parts.

| Part Number | Container Size | Units Per Case | |
|----------------|-------------------|-------------------|--|
| 03226 | 5 gallon pail | 1 | |
| 03228 | 55 gallon drum | 1 | |

SP-300™

Corrosion Inhibitor

Unique blend of solvents, oils and corrosion inhibitors that quickly displaces moisture, excess water-based coolants and grinding compounds. Short-to-medium term protection. Non-drying film protects indoors up to 9 months.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03246 | 5 gallon pail | 1 |



Corrosion Inhibitor

Provides protection for metal parts and assemblies that are stored indoors or in shipment. SP-350TM promotes easy start-up of stored equipment.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03262 🚺 | 16 oz aerosol | 12 |
| 03266 | 5 gallon pail | 1 |
| 03268 | 55 gallon drum | 1 |



SP-400™

Corrosion Inhibitor

Long-term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions. Provides protection of all equipment subject to heat, humidity, chemicals or severely corrosive atmospheres.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 03282* | 16 oz aerosol | 12 |
| 03286 | 5 gallon pail | 1 |
| 03288 | 55 gallon drum | 1 |




BATTERY TERMINAL PROTECTOR

Apply to battery terminals to provide a soft, dry, lead-free protective coating that keeps moisture, salts and road grime from corroding metal contacts. Enhances battery life and power by preventing corrosion-related leakage.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03175* | 12 oz aerosol | 12 |



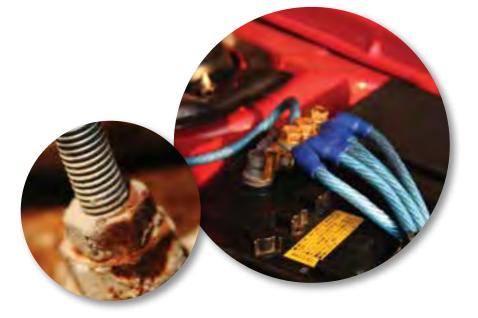

 $[\]Omega$ – 360° spray valve can be sprayed in the UP or DOWN position.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

STEEL RE-NU®

Stainless Steel Coating

Quick-drying, 100% #316L stainless steel coating provides corrosion resistance and protection against weather, sunlight, oil and water, in a variety of environments including marine, utility, chemical processing, food manufacturing and general maintenance repair.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 18211* | 16 oz aerosol | |



SEAL COAT®

Urethane Coating

Urethane Seal Coat® provides a conformal polyurethane coating that insulates electrical equipment and seals out water and moisture. Clear allows for visualization of equipment; Red provides striking contrast. Clear formulation is an excellent insulator of PC boards, since it allows visualization of circuit paths.

| Part Number | Container Size | Units Per Case |
|----------------|---------------------|-------------------|
| 18410* | Red 16 oz aerosol | 12 |
| 18411* | Clear 16 oz aerosol | 12 |



ZINC-IT®

Instant Cold Galvanize

High-performance coating of >93% pure zinc that electrochemically bonds with ferrous metals to form a galvanic cell. Zinc-It® is an excellent touch-up for damaged galvanized coatings.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 18412* | 16 oz aerosol | 12 |
| 18413¹ | 1 gallon can | 1 |



RUST CONVERTER

CRC Rust Converter neutralizes rust and converts it to a tough, black primer in one easy step. Fast drying coating can be painted over. Prevents future rusting by sealing out moisture and other outside elements with oil-based paint. Applications include vehicles, trailers, railings, bridges, equipment, storage tanks, transmission towers, etc.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 18418 | 1 quart bottle | 12 |
| 18419 | 1 gallon bottle | 4 |



BRIGHT ZINC-IT®

Instant Cold Galvanize

Acrylic based, light duty sacrificial zinc coating that inhibits corrosion and provides the beauty of a high shine bright metallic finish. Recommended for touch-up and repair of bright finish, hot-dip galvanized surfaces.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 18414* | 16 oz aerosol | 12 |



RUST REMOVER

CRC Rust Remover is a safe, effective, fast acting formula that removes rust, not metal. It leaves metal clean and ready to paint, plate or powder coat. No heavy wire brushing or sand blasting required. CRC Rust Remover removes only the rust and will not damage metal surfaces

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| 18421 | 1 gallon bottle | 4 |





^{1 -} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

CORROSION INHIBITORS

| Product | Film Type | Application | Corpeidecti | brying time | an specifications | s,D.I | , Schreiner give |
|----------------------------------|-------------------------------------|--|-------------------------|--------------------------|---|-------|------------------|
| SP-250™ | Ultra Thin, Non-Staining, Dry | Indoors – Up To 9 Months | Light | 1 Hour | NSF H2 Registered, Meets requirements of MIL-PRF-16173 Grade 3, Class I (corrosion test only) | No | 5 55 |
| SP-300™ | Ultra Thin | Indoors – Up To 9 Months | Light | Non-Drying | NSF H2 Registered | No | 5 |
| SP-350™ | Thin Oil | Indoors – Up to 2 Years | Moderate | Non-Drying | NSF H2 Registered | Yes | 16 5 55 |
| SP-400™ | Transparent, Amber, Waxy | Indoors & Outdoors – Up to 2 Years | Heavy | 1 Hour | NSF H2 Registered, Meets requirements of MIL-C-16173 Grade 4 (corrosion test only) | Yes | 16 5 55 |
| Battery Terminal Protector | Soft, Visible Waxy | Indoors – Up to 2 Years | Moderate to Heavy | Non- Drying | _ | Yes | 12 |
| Steel Re-Nu [®] | Steel, Dry | Outdoors – Up to 1 Year | Light | 20 Minutes | NSF R2 Registered | Yes | 16 |
| Zinc-It® | Zinc, Dry | Outdoors – 1-2 Years | Heavy | 20 Minutes 30 Minutes | Aerosol: Meets requirements of MIL-P-21035B, MIL-P-26915, MIL-P-46105 Bulk: Meets requirements of MIL- P- 46105, MIL-P-26915 | Yes | 16 1 |
| Bright Zinc-It [®] | Zinc, Dry | Outdoors – Up to 1 Year | Moderate | 20 Minutes | ASTM-A-780-93 | Yes | 16 |
| Seal Coat [®] Red | Brick Red, Dry | Electrical | Light | 15-30 Minutes | _ | Yes | 16 |
| Seal Coat [®] Clear | Clear, Dry | Electrical | Light | 15-30 Minutes | _ | Yes | 16 |
| Rust Converter | Milky Emulsion | Outdoors – Up to 2 Year | Heavy | 1 Hour | _ | No | Ů W |
| Rust Remover | Pale Yellow Liquid | NA | NA | NA | _ | No | 1 |

CONTACT CLEANER 2000®

Precision Cleaner

Provides fast cleaning action for the removal of dirt, light oils and other contaminants. It evaporates quickly, leaves no residue, has no flash or fire point, and contains no Class I or Class II Ozone Depleting Chemicals. Not recommended for use on Noryl® or polycarbonate type plastics.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 02140 🚺 1 | 16 oz aerosol | 12 |
| 021421 | 5 gallon pail | 1 |
| 02143 ¹ | 55 gallon drum | 1 |



XT-2000™ PRECISION CLEANER

A non-flammable, low odor, rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment. It is safe on most plastics and has no flash point.

| | Part | Container | Units |
|---|--------|---------------|----------|
| | Number | Size | Per Case |
| V | 02145 | 16 oz aerosol | 12 |

CO® CONTACT CLEANER



NT™ PRECISION CLEANER

Patented formula NT™ Precision Cleaner relies on advanced COzol® technology to effectively remove dirt, light oils and other contaminants from electronic equipment. It evaporates quickly and leaves no residue. NT™ Precision Cleaner has no flash point and contains no Class I or Class II Ozone Depleting Chemicals and is an optimal alternative to HCFC 141b-based cleaners when sensitive plastics are not an issue.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 02205 🗗 1 | 16 oz aerosol | 12 |



Advanced Technology Formula CO® Contact Cleaner does not contain known ozone depleting substances and is VOC exempt. Its blend of HFE and HFC solvents provide an optimal alternative to CFC, HCFC and flammable contact cleaners. Regular use of CO® Contact Cleaner will help prevent electrical failures, increase performance and prolong equipment life by dissolving and rinsing away contaminants.

| Part Number | Container Size | Units Per Case | |
|----------------|---------------------------------|-------------------|--|
| 02016 🕡 | 16 oz aerosol | 12 | |
| 020171 | 16 oz non-aerosol can w/trigger | 12 | |



CONTACT CLEANER 2000® VC

Precision Cleaner

Contact Cleaner 2000® VC is an aggressive advanced COzol® technology alternative precision cleaner designed to remove contaminants from electronic equipment. It provides an effective alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern. Contains no Class I or Class II Ozone Depleting Chemicals. It is VOC compliant in all 50 states[∞].

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 02240 🚺 | 16 oz aerosol | 12 |



PF PRECISION CLEANER

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue in electronic cleaning applications. PF Precision Cleaner has no flash point and is safe to use on plastics.

| Part | Container | Units |
|-------|-------------|----------|
| Numbe | r Size | Per Case |
| 02190 | 16 oz aeros | ol 12 |



QD® CONTACT CLEANER

A petroleum distillate and alcohol blended precision cleaner suitable for sensitive electronics. QD® evaporates quickly, leaves no residue and is safe to use on all plastics. QD® Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals. Ideal for applications where lower flash point solvents can be used.

| | Part Number | Container Size | Units Per Case |
|---|----------------|---------------------------------|-------------------|
| _ | 02130 🕡 * | 16 oz aerosol | 12 |
| | 021311* | 5 gallon pail | 1 |
| | 021321* | 55 gallon drum | 1 |
| ۱ | 021331* | 16 oz non-aerosol can w/trigger | 12 |





— 360° spray valve can be sprayed in the UP or DOWN position.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized. Noryl® is a registered trademarks of General Electric Corporation

ELECTRONIC COMPONENT CLEANER

Precision Cleaner

Aggressive precision cleaner for use on electronic components in industrial, electrical, and aviation applications. Its high purity, fast penetrating formula aggressively dissolves and rinses away dust, lint, dirt, oils, polar soils, and other contaminants from most non-plastic surfaces. It evaporates very rapidly, leaves no residue, and has no flash point.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 02200 🚺 1 | 16 oz aerosol | 12 |



HF™ CONTACT CLEANER

Petroleum distillate-based precision cleaner that offers the safety of a high flashpoint without leaving a residue. It may be used on most plastic materials. HF™ Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 02125 | 16 oz aerosol | | |



DUSTER™

Aerosol Dust Removal System

Safely removes dirt and dust from energized equipment without damaging sensitive components or surface finish. CRC Duster™ penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast of product to remove embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only.

| Part | Container | Units |
|--------|-----------------------|----------|
| Number | Size | Per Case |
| 14085 | 12 oz aerosol trigger | 12 |



HOT LINE TOOL CLEANER & PROTECTANT WIPES

These pre-moistened, disposable wipes are saturated with a special cleaner and protectant designed to effectively clean dirty fiberglass hot line tools while leaving behind a protectant to help keep them clean. The convenient 8" x 10.5" wipes allow for easy one-time use and eliminate the need for rags and storing bulk chemicals.

| Part Number | | | | |
|----------------|-----------------|---|--|--|
| 04110 | Box of 50 wipes | 1 | | |



Azeotropic blend designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. CE™ Precision Cleaner has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating without leaving a residue. Low odor.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 14035 | 16 oz aerosol | 12 |



— 360° spray valve can be sprayed in the UP or DOWN position.
 1 – Item restricted from sale in some states. See product page on C

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

ELECTRICAL PRECISION CLEANERS

| Product | Type of Cleaner | Flash Poil | drying time | Dielectic | Safe On Place | .s 5.11.1. ¹ | , usf Re | gistration voc gl | Contained Size |
|---|-------------------------------------|---------------|-------------|---|---------------------------------------|----------------------------|----------|-----------------------------------|----------------|
| Contact Cleaner 2000® | HFC/COzol® | None | Fast | 30,800 | May be harmful to some plastics | Yes | K2 | 730.3 | 16 5 55 |
| NT™ Precision Cleaner | HFC/COzol® | None | Fast | 30,800 | May be harmful to some plastics | Yes | K2 | 730.3 | 16 |
| Contact Cleaner 2000® VC | HFC/COzol® | None | Fast | 30,800 | No | Yes | K2 | 388.2 | 16 |
| XT-2000™ Precision Cleaner | HFC/COzol® | None | Fast | 30,200 | Safe on most plastics | Yes | K2 | 324.3 | 16 |
| CO® Contact Cleaner | HFC | None | Very Fast | 27,600 | Yes | Yes | K2 | 0 | 16 16 |
| PF Precision Cleaner | HFC | None | Very Fast | 31,500 | Yes | Yes | K2 | 90.6 | 16 |
| QD® Contact Cleaner | Petroleum Distillate/ Alcohol | <0°F TCC | Very Fast | 36,700 (aerosol) 30,500 (bulk) | Yes | Yes | K2 | 495 (aerosol) 552 (bulk) | 16 16 5 55 |
| Electronic Component Cleaner | HFC/COzol® | None | Fast | 30,800 | No | Yes | K2 | 730.3 | 16 |
| Hot Line Tool Cleaner & Protectant Wipes | Alcohol/ Silicone | 57°F TCC* | Moderate | 10,900 | Safe on most plastics | No | No | 694 | 50 |
| CE™ Precision Cleaner | HFC | None | Slow | 28,400 | Safe on most plastics | Yes | K2 | 221.7 | 16 |
| HF™ Contact Cleaner | Petroleum Distillate | 204°F PMCC | Slow | 45,700 | Safe on most plastics | Yes | K2 | 0 | 16 |
| Duster™ Aerosol Dust Removal System | HFC | None | Fast | ND | Yes | No | K2 | 0 | 12 |

 $\label{eq:continuous} \mbox{TCC} = \mbox{Tag Closed Cup; PMCC} = \mbox{Pensky-Martens Closed Cup; ND} = \mbox{Not Determined}$

*Liquid expressed from wipes

LECTRA CLEAN®

Heavy Duty Electrical Parts Degreaser for Energized Equipment

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances from energized electrical equipment to increase operating efficiency. Lectra Clean® offers quick & efficient degreasing action, fast evaporation and no residue. With no flash point, it is an excellent alternative to 1,1,1-based cleaning products. Use caution near plastics. Designed specifically to be safe for use on energized electrical equipment.

| Part Number | | |
|----------------|-----------------|----|
| 02018 | 20 oz aerosol | 12 |
| 02020 | 1 gallon bottle | 4 |
| 02021 | 5 gallon pail | 1 |
| 02023 | 55 gallon drum | 1 |

LECTRA CLEAN® II

An excellent alternative for cleaning electric motors and equipment where chlorinated solvents are not acceptable. Lectra Clean® II effectively removes soils and cleans surfaces without residue build-up. Use caution on plastics. Nonconductive, non-corrosive, low odor.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 02120 | 20 oz aerosol | 12 |
| 02121 | 1 gallon bottle | 4 |
| 02122 | 5 gallon pail | 1 |
| 02124 | 55 gallon drum | 1 |

ELECTRICAL PARTS CLEANER for Energized Equipment

Effective heavy duty degreaser provides strong degreasing action, fast evaporation and no residue when cleaning energized electrical parts and equipment. It is non-flammable, VOC exempt and contains no Class I or Class II Ozone Depleting Chemicals. Use caution near plastics and paints. Designed specifically to be safe for use on energized electrical equipment.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 02180 | 20 oz aerosol | 12 |
| 02183 | 5 gallon pail | 1 |

FAST DRY DEGREASER

Innovative heavy duty non-chlorinated degreasing solvent. Excellent for cleaning electrical equipment where rapid turn-around is necessary and low flash point solvents can be used. Use caution on plastics.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 021851* | 20 oz aerosol | 12 |



LECTRA FORCE™

Electrical Cleaner

Lectra ForceTM utilizes revolutionary technology that combines the power of a high performance, industrial strength degreaser with lower VOCs. It quickly dissolves grease, oil and sludge for more efficient operation of electrical equipment. Lectra ForceTM evaporates rapidly, leaves no residue, and has a good health and safety profile.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 02115¹ | 20 oz aerosol | 12 |



CITRUS DEGREASER

A unique, heavy duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash off and without leaving a residue. Use caution on plastics and paints.

| Part Number | Container Size | Units Per Case |
|--------------------|---------------------------------|-------------------|
| 14170 🕜 | 20 oz aerosol | 12 |
| 14970 ³ | 20 oz aerosol (MUO) | 12 |
| 14171 ³ | 16 oz non-aerosol can w/trigger | 12 |
| 141723 | 1 gallon bottle | 4 |
| 14173 ³ | 5 gallon pail | 1 |
| 14174 ³ | 55 gallon drum | 1 |



NATURAL DEGREASER™

Citrus-Based Degreaser

Naturally formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Natural Degreaser™ contains no Class I or Class II Ozone Depleting Chemicals or chlorinated solvents. Use caution on plastics and paints.

| Part Number | Container Size | Units Per Case | |
|--------------------|-------------------|-------------------|--|
| 14005 | 20 oz aerosol | 12 | |
| 14007 ¹ | 5 gallon pail | 1 | |
| 140081 | 55 gallon drum | 1 | |







1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

3 - Not for retail sale, for use in manufacturing establishments only.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



| Product | Type of Closure | Cleanin | Strength Hash Pol | dring fif | jelectic Dielectich | th Nates | Ç Oda | NSF RE | gistation S.D.L. | Continue zite |
|-----------------------------|--|-------------|------------------------------------|-----------|------------------------|-----------------------------|--------------|--------|---------------------|---------------|
| Lectra Clean® | Chlorinated | 95 | None | Very Fast | 50,500 | 0 | Moderate | K1, K2 | Yes | 20 1 5 55 |
| Lectra Clean® II | Petroleum Distillate/ Glycol Ether | 75 | 185°F TCC | Slow | 42,100 | 0 | Low | K1, K2 | Yes | 20 1 5 55 |
| Electrical Parts Cleaner | Chlorinated | 95 | None | Fast | 37,500 | 0 | Moderate | K2 | Yes | 20 5 |
| Fast Dry Degreaser | Blend Of Organic Solvents | 106 | <0°F TCC | Fast | 6,000 | 333 | Moderate | K2 | Yes | 20 |
| Lectra Force™ | HFC/DCE | 97 | None | Fast | 39,000 | 541 | Moderate | K2 | Yes | 20 |
| Citrus Degreaser | d-Limonene & Petroleum Distillate | 32 54 | 170°F TCC 100°F TCC (MUO) | Slow | 58,600 35,000 | 79.4 820 790 (MUO) | Light Citrus | C1 | Yes | 20 16 1 5 55 |
| Natural Degreaser™ | Terpene/ Glycol Ether | >200 111 | 150°F TCC 172°F TCC | Slow | 28,600 45,700 | 89.8 35.2 | Citrus | C1 | Yes | 20 5 55 |





ELECTRICAL CABLE CLEANERS



CABLE CLEAN® DEGREASER

High Voltage Splice Cleaner

Advanced technology that combines the power of a high performance, high voltage splice and termination cleaner with a non-chlorinated, industrial strength degreaser. Cable Clean® Degreaser helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions by quickly removing grease, oil, wax, dirt, silicone lubricants and other contaminants.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 02064 | 20 oz aerosol | 12 |
| 02066 | 1 gallon can | 4 |
| | | |



CABLE CLEAN®

High Voltage Splice Cleaner

HFC/COzol® based cleaner that aggressively removes contaminants from the semi-conductive core of high voltage cables during splicing and termination. Cable Clean® helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 02069 | 20 oz aerosol | |



CABLE CLEAN® RD™ (Rapid Dry) High Voltage Splice Cleaner

Chlorinated solvent-based cleaner for the removal of contaminants from the semi-conductive core of high voltage cables. Offers effective cleaning action with the benefits of non-flammability, no residue and fast evaporation. Cable Clean® RD™ can be used to replace 1,1,1-Trichloroethane without sacrificing performance. It contains no known Ozone Depleting Chemicals.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 02150 | 16 oz aerosol | 12 |
| 02152 | 1 gallon bottle | 4 |



CABLE CLEAN® HF[™] (High Flash) High Voltage Cable Cleaner

High flashpoint, petroleum distillate-based cleaner for the removal of contaminants from the semi-conductive core of high voltage cables. Cable Clean® HFTM provides an alternative to chlorinated, ozone depleting or terpene-based cable cleaning products.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 02170 | 16 oz aerosol | 12 |



| Product | Type of the after | s contines | Geaning Cleaning | SHERBIT REEL POLITICAL | nt Dyna i | ne dielectic | Dength Odor | NSF P | S.D.L. | Contained Size |
|---------------------------------------|-------------------------|---------------|------------------|------------------------|-----------|--------------|-------------------|-------|--------|----------------|
| Cable Clean [®] Degreaser | Halogenated | No | 125 | None | Fast | 26,800 | Strong | K2 | Yes | 20 1 |
| Cable Clean® | Halogenated | No | 97 | None | Fast | 39,000 | Faint Ethereal | None | Yes | 20 |
| Cable Clean® RD™ | Chlorinated | No | 96 | None | Fast | 41,100 | Strong | K2 | Yes | 16 1 |
| Cable Clean® HF™ | Petroleum Distillate | No | 25 | 204°F TCC | Slow | 45,700 | Low | None | Yes | 16 |

 ${\tt ODC = Ozone\ Depleting\ Compounds;\ TCC = Tag\ Closed\ Cup;\ KB = Kauri\ Butanol}$

2-26®

Multi-Purpose Precision Lubricant

Corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. 2-26® drives out moisture and leaves a thin, long lasting film. Excellent for use around modern plastics and insulators.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------|-------------------|
| 02004 🚺 | 6 oz aerosol | 12 |
| 02005 🚺 | 16 oz aerosol | 12 |
| 02007 | 16 oz trigger bottle | 12 |
| 02006 | 1 gallon bottle | 4 |
| 02009 | 5 gallon pail | 1 |
| 02011 | 55 gallon drum | 1 |

ELECTRICAL SILICONE LUBRICANT

Lubricates, waterproofs, and protects with a thin, clear, non-staining dry film. Eliminates binding and sticking while protecting most surfaces. Low surface tension permits better coverage and deeper penetration.

| Part Number | | |
|----------------|----------------|----|
| 02094* | 16 oz aerosol | 12 |
| 02096* | 5 gallon pail | 1 |
| 02097* | 55 gallon drum | 1 |

STOR & LUBE®

Corrosion Inhibitor

Product

Corrosion protection for metal parts and assemblies that are stored indoors. Promotes easy start-up of stored equipment. Will also lubricate moving metal parts subject to constant wear.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 02061 | 16 oz aerosol | 12 | |



DIELECTRIC GREASE

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants.

| | Part Number | Container Size | Units Per Case |
|---|----------------|--------------------------------------|-------------------|
| 7 | 02083* | 16 oz aerosol | 12 |
| | 02085 | 6 oz pressurized can w/Select-A-Bead | 12 |

LECTRA SHIELD™

Long Term Corrosion Inhibitor

Long term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions. Lectra Shield™ is an easily removable film that will provide protection of all equipment subject to heat, humidity, chemicals or severely corrosive atmospheres.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 02031* | 16 oz aerosol | 12 |

HOT LINE TOOL CLEANER & PROTECTANT WIPES

These pre-moistened, disposable wipes are saturated with a special cleaner and protectant designed to effectively clean dirty fiberglass hot line tools while leaving behind a protectant to help keep them clean. The convenient 8" x 10.5" wipes allow for easy one-time use and eliminate the need for rags and storing bulk chemicals.

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| 04110 | Box of 50 wipes | 1 |




| | cite | ngth | ation |
|-------------|----------------|-----------------------|----------------------|
| Flash Point | Dielectic Stei | NSF Regi ^e | 5.1.1.1 [®] |

| 2-26 [®] | Petroleum | Non-Drying | Amber | 200°F TCC | 51,300 | H2 | Yes | 6 16 16 1 5 55 |
|---|-------------------------|---------------------|-------|-------------------------------|-------------|----|-----|----------------|
| Electrical Silicone Lubricant | Silicone | Dry | Clear | <0°F TCC | 350 | H1 | Yes | 16 5 55 |
| Stor & Lube® | Petroleum | Non-Drying | Amber | 144°F TCC | ND | H2 | Yes | 16 |
| Dielectric Grease | Silicone- Based | Grease | White | <20°F TCC >572°F COC | 500 >450 | H1 | Yes | 6 16 |
| Lectra Shield™ | Petroleum Distillate | Transparent Waxy | Amber | <0°F TCC | ND | No | Yes | 16 |
| Hot Line Tool Cleaner & Protectant Wipes | Alcohol/ Silicone | Transparent | Clear | 572°F TCC* | 10,900 | No | No | 50 |

TCC = Tag Closed Cup; COC = Cleveland Open Cup

— 360° spray valve can be sprayed in the UP or DOWN position.





^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

TRUETAP® HD

Cutting Fluid

Designed as a heavy duty cutting fluid for use in severe applications, TrueTap® HD is a thick fluid that clings to the cutting tool throughout the operation. Contains no 1.1.1-Trichloroethane.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 03400 ² | 16 oz bottle | 12 |
| 03403 ² | 55 gallon drum | 1 |



CUTTING OIL

Superior thread cutting lubricant for use on all types of both ferrous and non-ferrous metals, including brass, copper and aluminum.

| Part Number | Container Size | Units Per Case | |
|--------------------|-------------------|-------------------|--|
| 14050 ² | 16 oz aerosol | 12 | |
| 14051 ² | 1 gallon bottle | 4 | |



TRUETAP® FOAMY

Cutting Fluid

Excellent extreme duty cutting fluid developed for ease of application. Works well on both ferrous and non-ferrous metals and can be applied before or during cutting operation. Foaming action penetrates deep into the cut to extend cutting tool life and promotes a superior finish.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03/102 | 16 oz gerecel | 12 |



HONING & CUTTING OIL

All-purpose, non-chlorinated, metal cutting/machining oil extends tool life and improves the finish of machined surfaces. It contains extreme pressure, anti-weld, lubricity, wetting agent and anti-corrosion additives to allow higher machine speeds and feed rates. Better Falex values than those produced by Sulfur-Chlorine systems.

| Part Number | | |
|----------------|-----------------|---|
| SL25232 | 1 gallon bottle | 4 |



TRUETAP® AQUA Cutting Fluid

A suitable replacement for solvent or oil-based cutting fluids. TrueTap® Aqua is a water-soluble cutting fluid that exhibits excellent cooling and lubrication properties. Works exceptionally well in machine tools containing water-soluble coolants. Emulsifies with the coolant without causing contamination.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 03440 ² | 16 oz bottle | 12 |
| 034422 | 5 gallon pail | 1 |



SOLUBLE OIL

Improves wetting, cleaning and lubricating during metal cutting and grinding operations. It prevents rust, corrosion and rancidity.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2512 | 1 quart bottle | 12 |
| SL2513 | 1 gallon bottle | 4 |
| SL2515 | 5 gallon pail | 1 |



TRUETAP® WAX STICK LUBRICANT

Innovative, multi-purpose lubricant stick that effectively removes heat and lubricates. Capable of withstanding extreme pressure. Convenient stick is easy to use and mess-free.

| Part | Container | Units |
|--------|-------------|----------|
| Number | Size | Per Case |
| 03480 | 16 oz stick | 10 |



BLUE LAYOUT FLUID

Applies a smooth even coat for all layout work. The dark blue fluid dries very quickly, sticks to both metal and glass and allows you to scribe sharp precise lines.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03066* | 16 oz aerosol | 12 |



LAYOUT FLUID REMOVER

Specifically formulated to remove layout fluids quickly and effectively from metal or glass.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03069* | 16 oz aerosol | |



^{2 -} Item restricted from sale in SCAQMD

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

| Product | 14Pe | Calat | Weightbath | Containers |
|---|---|-------------|--------------------------------|------------|
| TrueTap [®] HD Cutting Fluid | Natural Oil, w/EP Additives | Light Amber | All Metals | 16 55 |
| TrueTap [®] Foamy Cutting Fluid | Natural & Mineral Oils w/ EP Additives | Amber | All Metals | 16 |
| TrueTap [®] Aqua Cutting Fluid | Water-Based | Blue | All Metals except Magnesium | 16 5 |
| TrueTap® Wax Stick | Wax-Based | Amber | All Metals | 16 |
| Cutting Oil | Petroleum | Brown | All Metals | 16 1 |
| Honing & Cutting Oil | Mineral Oil | Red | All Metals | 1 |
| Soluble Oil | Mineral Oil | Amber | All Metals | 1 1 5 |
| Blue Layout Fluid | Organic Solvents/Alcohol | Blue | All Metals | 16 |
| Layout Fluid Remover | Organic Solvents/Alcohol | Clear | All Metals | 16 |



RTV SILICONE ADHESIVE/SEALANTS

CRC Room Temperature Vulcanizing (RTV) Adhesive/Sealants are designed for a wide range of sealing, bonding, protecting and waterproofing. They cure at room temperature — no special curing methods required. The chemically stable formulations show little change in physical properties after exposure to rain, snow, temperature extremes and weathering.

Clear: Forms a barely visible water-tight seal

White: Designed for high moisture, indoor/outdoor applications

Blue: Heavy duty industrial gasket sealant

Red: High temperature, low odor, non-corrosive gasket sealant Black: High pressure, low odor, non-corrosive gasket sealant

Gray: Forms a visible, water-tight seal

RTV SILICONE PRESSURIZED TUBES



Revolutionary packaging with Select-a-Bead® nozzle — allows user to control bead width. Dispenses a uniform bead for consistent results. Pressurized package keeps silicone fresh so it won't dry out. Self-sealing plug — Simply pull out to re-use the product. VOC compliant. $^{\infty}$

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 14055+ | Clear 8 oz tube | 12 |
| 14056+ | White 8 oz tube | 12 |
| 14057 | Blue 8 oz tube | 12 |
| 14059 | Red 8 oz tube | 12 |
| 14072 | Black 8 oz tube | 12 |
| | | |

NSF.



RTV SILICONE CARTRIDGES

Economical for large jobs. Convenient screw-on nozzle. Fast dispensing for applications that require less precision. VOC compliant. $^\infty$

| Part Number | Container Size | Units Per Case |
|----------------|-----------------------|-------------------|
| 14073+ | Clear 12 oz cartridge | 12 |
| 14074+ | White 12 oz cartridge | 12 |
| 14075 | Red 12 oz cartridge | 12 |



FOOD ZONE SILICONE SEALANTS

NSF Certified under Standard 51 for sealing, bonding, protecting and water-proofing food equipment. They show little change in physical properties after exposure to moisture and temperature extremes.

| Part Number | Container Size | Units Per Case |
|----------------|--------------------------|-------------------|
| 14082+ | White 12 oz cartridge | 12 |
| 14083+ | Clear 12 oz cartridge | 12 |
| 14087+ | Gray 12 oz cartridge | 12 |
| 14088+ | Aluminum 12 oz cartridge | 12 |



SILICONIZED ACRYLIC LATEX CAULK

A white latex caulk designed for a wide range of sealing, bonding, protecting and waterproofing. It is based on a 100% acrylic emulsion and is modified with special additives to optimize resistance to oxidation, UV degradation and cold temperatures. It bonds to all common building materials and is flexible enough to be used on moving parts.

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| 14108 | 12 oz cartridge | 12 |

^{+ -} Meets NSF/ANSI Standard 51

SPRAY ADHESIVE

General purpose, quick tack adhesive especially formulated to bond to many foils, plastics, papers, foams, metals, cardboards and cloths. Compare to 3M® Super 77™ Adhesive. Utilizes a unique web spray applicator.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03018 | 24 oz aerosol | |



PIPE THREAD SEALANT

Non-toxic, non-drying thread sealing compound consisting of a blend of non-matting grease, PTFE, and other inert compounds to produce a leak proof seal.

| Part | Container | Units |
|----------|---------------------|----------|
| Number | Size | Per Case |
| SI 35401 | 8 oz bottle w/brush | 6 |



FIRE BLOCK FOAM

Flame Resistant Sealant

Fire Block Foam is an approved foam insulation for sealing air penetrations. By blocking air flow, it effectively slows the spread of fire and smoke. Its advanced formula is tinted orange for easy visual identification by building code officials and inspectors. The reusable foam saver nozzle keeps the product usable for up to 1 month. Self-extinguishing formula meets key building code requirements. UL94 Flammability Test - pass best rating V-0.


| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 14084 | 16 oz aerosol | 12 | |



MINUTE MEND™ Multi-Purpose Epoxy Putty

A two-part epoxy putty packaged in a convenient one piece stick. Permanently repairs scratches, gouges and holes in drums, tanks, pipes, castings, molds, sinks, tubs and leaky gaskets. Perform routine electrical jobs such as mounting terminal blocks, packing wires and repairing breaker boxes. Ideal for stopping leaks, can even be used under water. Can be used in plumbing, electrical, ceramic, vehicle and machinery repair. Ready to use in less than one minute after mixing.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 14070 | 4 oz stick | 24 |
| 14071 | 2 oz stick | 40 |

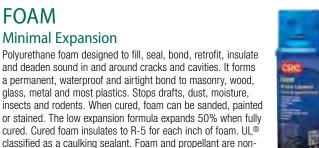

| flammable. Reu | sable for up to 30 days a | fter initial use. |
|----------------|---------------------------|-------------------|
| Part Number | Container Size | Units Per Case |
| 14077 | 16 oz aerosol | 12 |



PERMA-MEND™ **UV Curable Repair Patch**

A fiberglass reinforced, self-adhesive repair patch that is flexible, waterproof and UV resistant. Easy to use, no mixing required. Can be painted after curing. Rated up to 2200 psi when properly applied.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 14089 | 3" x 6" Patch | 12 |
| 14094 | 6" x 9" Patch | 12 |
| 14096 | 9" x 12" Patch | 12 |
| 14098 | UV Flashlight | 1 |







SEALANTS & ADHESIVES

| | m ¹⁸ | Corresi | e to Metals Tennerature Ref | tionstand | h2 Dif Co | dii Terdika sire | s st configurations | Cartifules Safe |
|---|-----------------|---------|---------------------------------|------------|------------|-------------------------|--|--------------------|
| Product | Rooti | Calu | Territ | Florigast | Dielegolis | Tensil ab | Configuez. | Conte |
| Food Zone Silicone Sealant White | Yes | Yes | -70°F to 400°F | 400% | 25 KV/mm | 250 psi | Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600 | 12 |
| Food Zone Silicone Sealant Clear | Yes | Yes | -70°F to 400°F | 400% | 25 KV/mm | 250 psi | Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600 | 12 |
| Food Zone Silicone Sealant Gray | Yes | Yes | -70°F to 400°F | 400% | 25 KV/mm | 250 psi | Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600 | 12 |
| Food Zone Silicone Sealant Aluminum | Yes | Yes | -70°F to 400°F | 400% | 25 KV/mm | 250 psi | Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600 | 12 |
| RTV Silicone Adhesive/Sealant Clear | Yes | Yes | -76°F to 400°F 400°F Interm. | 400% | 25 KV/mm | 250 psi | MIL A-46106 TT-S-00230C TT-S-001543A FDA 21 CFR-175.105 | 8 12 |
| RTV Silicone Adhesive/Sealant White | Yes | Yes | -76°F to 400°F 400°F Interm. | 400% | 25 KV/mm | 250 psi | MIL A-46106 TT-S-00230C TT-S-001543 FDA 21 CFR-175.105 | 8 12 |
| RTV Silicone Adhesive/Sealant Blue | Yes | Yes | -60°F to 450°F | 400% +25% | 25 KV/mm | 250 psi | MIL A-46106 TT-S-00230C TT-S-001543A FDA 21 CFR-175.105 | 8 |
| RTV Silicone Adhesive/Sealant Red | Yes | No | -80°F to 500°F 600°F Interm | 550% | 18 KV/mm | 250 psi | MIL A-46106 TT-S-001543A TT-S-00230C | 8 12 |
| RTV Silicone Adhesive/Sealant Black | Yes | No | -30°F to 450°F | 400% +25% | 18 KV/mm | 250 psi | MIL A-46106 TT-S-001543A TT-S-00230C | 8 |
| RTV Silicone Adhesive/Sealant Gray | Yes | Yes | -70°F to 400°F | 400% | 25 KV/mm | 250 psi | TT-S-001543A TT-S-00230C MIL-A-46106 FDA 21 CFR-175.105 | 8 |
| Siliconized Acrylic Latex Caulk | Yes | No | -20°F to 180°F | 500% +/-50 | | 41 psi | ASTM C-834-76 | 12 |
| Spray Adhesive | Yes | No | -20°F to 123°F | | | | | 24 |
| Pipe Thread Sealant | NA | No | -35°F to 550°F | | | | ASTM B-117 | Ď |
| Fire Block Foam | Yes | No | -200°F to 200°F (cured foam) | | | 26 psi | UL 1715 ASTM E-814 | 16 |
| Foam Minimal Expansion | Yes | No | -200°F to 200°F (cured foam) | | | | Insulates to R-5 UL R14175 | 16 |
| Minute Mend™ | Yes | No | -40°F to 250°F 350°F Interm. | | 300 V/mil | 500 lbs. to 900 lbs. | | 2 |
| Perma-Mend™ | Yes UV Cure | No | -40°F to 392°F | | 9 KV/mm | 2200 psi | | 9 x 12 6 x 9 3 x 6 |

AIR TOOL OIL

SAE 10

Lubricates and protects pneumatic equipment. Increases torque; assures long tool life. Reduces rust, varnish, sludge and acids.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2531 | 15 oz bottle | 12 |
| SL2533 | 1 gallon bottle | 4 |



UNIVERSAL 2-CYCLE OIL

Extends engine service life. Minimizes plug fouling, port plugging and ring sticking. Clean burning with minimal smoke. Protects against heat, corrosion and rust.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2261 | 15 oz bottle | 12 |
| SL2262 | 1 quart bottle | 12 |



FOOD GRADE AIR TOOL OIL

NSF H1 Registered for incidental food contact. A fully synthetic food grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment. Provides lubrication for all air line equipment used in food processing plants.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2300 | 1 quart bottle | 6 |
| 04258 | 5 gallon pail | 1 |



HYDRAULIC & JACK OIL

SAE 20

Protects all parts in hydraulic jacks over a wide temperature range. Prevents foaming, rust, oxidation, corrosion and seal swell.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2621 | 15 oz bottle | 12 |
| SL2552 | 1 quart bottle | 12 |
| SL2553 | 1 gallon bottle | 4 |
| SL2555 | 5 gallon pail | 1 |



GL-4 MULTI-PURPOSE GEAR OIL

SAE 85W90

Provides lubrication over a wide temperature range. Protects against corrosion in industrial drives, worm and hypoid gear sets. Good high temperature properties. Reduces wear; extends life of gear teeth.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL24229 | 1 quart bottle | 12 |
| SL24239 | 1 gallon bottle | 4 |
| SL24259 | 5 gallon pail | 1 |



BAR & CHAIN LUBRICANT

Reduces wear and friction. Remains fluid in cold temperatures. Performs well on equipment subjected to loads, water and high speeds.

| | Part | Container | Units |
|---|--------|----------------|----------|
| | Number | Size | Per Case |
| • | SL2612 | 1 quart bottle | 12 |



COMPRESSOR OIL

SAE 30

Helps promote longer life in all types of reciprocating and rotary compressors. Solvent refined and clay filtered for long lasting, anti-foul operation. Cleans valve seat deposits as they form. Prevents ring sticking and reduced wear.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL22131 | 1 quart bottle | 12 |
| SL22133 | 1 gallon bottle | 4 |



GL-4 MULTI-PURPOSE GEAR OIL

SAE 140

Contains anti-rust, anti-oxidation, anti-wear and extreme pressure additives. Provides the corrosive protection and film strength needed in industrial drives, worm and hypoid gear sets. Wide temperature range. Extends life of gear teeth.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL24228 | 1 quart bottle | 12 |
| SL24238 | 1 gallon bottle | 4 |



GL-5 PLUS NEW GENERATION™

Heavy Duty Limited Slip Gear Oil SAE 85W140

Meets many military and commercial specifications and service requirements. Excellent for use where seasonal temperatures fluctuate widely. Minimum viscosity change during service. Superior performance in extreme pressure and high load conditions.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2432 | 1 quart bottle | 12 |
| SL2433 | 1 gallon bottle | 4 |



GL-5 PLUS NEW GENERATION™ Limited Slip Gear Oil SAE 80W90

Thermally stable, high-quality, multi-purpose automotive and truck lubricant with extreme pressure properties. Especially suited for use in high performance differentials. Assures absolute lubrication and protection against shock loading, gear scoring; prevents chatter, noise and vibration in limited-slip axles. Contains rust and corrosion inhibitors. Provides protection for operations under both high speed/low torque and low speed/high torque conditions.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2472 | 1 quart bottle | 12 |
| SL2473 | 1 gallon bottle | 4 |
| SL2475 | 5 gallon pail | 1 |



GL-5 PLUS NEW GENERATION

Heavy Duty Limited Slip Gear Oil SAE 75W90

Protects against corrosion, seal damage, oxidation and wear. Provides better protection and extended drain intervals in new cars, 4-WDs, high performance vehicles, and domestic and import cars and trucks with limited-slip, sure-grip and posi-traction type differential systems. Excellent performance over a wide range of temperatures. Provides protection for operations under both high speed/low torque and low speed/high torque conditions.

| Part Number | Container Size | Units Per Case |
|------------------|-----------------------------------|-------------------|
| SL2462 SL2463 | 1 quart bottle 1 gallon bottle | 12 |
| 3L2403 | i galloii bottle | 4 |
| | | |



SYN-GO® OEM GRADE Synthetic Gear Oil SAE 75W140

Excellent performance and reliability under the most demanding and harsh operating conditions. Enhances transmission and differential life and reduces maintenance costs and downtime. Dramatically extends drain and fill intervals. Improves fuel efficiency. Provides superior lubrication protection from -40°F to 350°F.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL2495 | 1 quart bottle | 6 |
| SL2496 | 1/2 gallon bottle | 4 |



| Product | 115 ° 51. | 115° 100° C.5.1. | € ^{kg®} | ACIMA | WH Stee |
|---|-----------|------------------|------------------|-------|--------------------------------|
| GL-4 Multi-Purpose Gear Oil 85W90 | 210 | 17 | Mineral Oil | 5 EP | MIL-PRF-2105 |
| GL-4 Multi-Purpose Gear Oil 140 | 210 | 27.5 | Mineral Oil | 8 EP | MIL-PRF-2105 |
| GL-5 Plus New Generation™ Heavy Duty Gear Oil w/Limited Slip 85W140 | N/A | 27 | Mineral Oil | 7 EP | MIL-PRF-2105E |
| GL-5 Plus New Generation™ Gear Oil w/Limited Slip 75W90 | 70 | 14.5 | Mineral Oil | 6 EP | MIL-PRF-2105E MIL-PRF-2105D |
| GL-5 Plus New Generation™ Heavy Duty Gear Oil w/Limited Slip 80W90 | N/A | 14 | Mineral Oil | 4 EP | MIL-PRF-2105D |
| Syn-Go [®] Synthetic Gear Oil 75W140 | 156 | 25 | Synthetic Fluid | 6 EP | |

٠2.

LITHIUM-BASED

SUPER WHITE™

Multi-Purpose Grease

Meets late-model high-tech specifications. NLGI-1.5 lithium base. Wide temperature range of 0°F to 300°F.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------|-------------------|
| SL3150 | 14 oz cartridge | 10 |
| SL3151 | 14 oz can | 12 |
| SL3155 | 35 lb pail | 1 |
| SL3360 | 10 oz tube | 6 |
| SL3361 | 1.75 oz squeeze tube | 24 |



MOLY-GRAPH®

Extreme Pressure Multi-Purpose Grease

Molybdenum and graphite establish a fine micron plating on all surfaces. Lithium base NLGI-2 grease with drop point of 350°F. Great for use on ball joints, chassis points, bushings and roller bearings.

| | Part Number | Container Size | Units Per Case |
|---|----------------|-------------------|-------------------|
| Ü | SL3141 | 14 oz can | 12 |
| | SL3144 | 3/3 oz cartridges | 6 |
| | SL3145 | 35 lb pail | 1 |
| | SL3146 | 7 lb pail | 4 |
| | SL3330 | 14 oz cartridge | 10 |



Extreme Pressure

Prevents friction, galling and wear on all types of engine components during assembly, start-up and break-in periods.

ENGINE ASSEMBLY LUBE

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3331 | 10 oz tube | 6 |
| SL3333 | 2.75 oz tube | 12 |



SYNTHETIC-BASED

SILARAMIC®

Brake System Grease

Protects all moving caliper hardware, mating surfaces and backing plates with the latest rust, oxidation and anti-wear additives to provide lasting protection against friction, wear and corrosion. Ideal for high performance or racing applications.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| 05361 | 5 oz tube | 12 |



PERMATHERM™

High Temp Synthetic Grease

High performance, synthetic NLGI-1.5 grease. Contains rust and oxidation inhibitors to increase service life and protect against corrosion. Withstands constant operating temperature up to 400°F and intermittent temperatures of 500°F- 600°F. Beyond 600°F, base fluid slowly evaporates with no carbon residue.

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| SL3580 | 14 oz cartridge | 10 |





LITHIUM GENERAL **PURPOSE GREASE**

Lithium base NLGI-2 grease designed for light duty applications. Use on motor bearings, pump bearings and light duty applications. Drop point: 340°F.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3310 | 14 oz cartridge | 10 |
| SL3311 | 14 oz can | 12 |
| SL3315 | 35 lb pail | 1 |
| SL3317 | 120 lb keg | 1 |



Extremely stable lithium base grease with molybdenum disulfide; extends the life of C.V. joints. Will not attack or run out of C.V. boot. Protects against rust and oxidation. Contains extreme pressure and anti-wear additives.

| Part | Container | Units |
|---------|--------------------|----------|
| Number | Size | Per Case |
| SI 3174 | 4 oz tube (carded) | |



SYNTHETIC BRAKE & CALIPER GREASE

Synthetic grease prevents caliper binding, vibration and corrosion. Contains molybdenum, PTFE and graphite for an extreme temperature range of -30°F to 600°F. Eliminates uneven pad wear.

| Part Number | Container Size | Units Per Case |
|----------------|------------------------|-------------------|
| 05351 | 2.5 oz. tube | 6 |
| 05353 | 12 oz. tub | 12 |
| 05359 | 8 fl. oz. bottle | 6 |
| SL3301 | 2.5 oz. tube | 6 |
| SL3302 | 1/3 oz. carded packets | 12 |
| SL3303 | 12 oz. tub | 12 |



LITHIUM COMPLEX-BASED

DRILLER RED GREASE

Premium quality lithium complex, Extreme Pressure (EP) grease with an industry high 80+ lb Timken OK load. Driller Red Grease is designed to withstand greater amounts of pressure, especially in oil and gas applications. It offers superior wear and shock load protection to applications with high axial or thrust loads.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3640 | 14 oz cartridge | 10 |
| SL3650 | 35 lb pail | 1 |

Extreme Pressure

STA-PLEX™ PREMIUM RED GREASE

A superior multi-purpose certified lithium complex based NLGI-2 GC-LB grease. Contains extreme pressure, anti-wear, and anti-oxidation additives. Ideal for high temperature and performance applications. Drop point: 500°F.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3190 | 14 oz cartridge | 10 |
| SL3191 | 14 oz can | 12 |
| SL3195 | 35 lb pail | 1 |
| SL3197 | 120 lb keg | 1 |

STA-PLEX

POLYUREA-BASED

LECTRA LUBE™ ELECTRIC MOTOR GREASE

Lectra LubeTM is a premium long-life grease with excellent thermal stability. This grease has excellent water resistance and will not washout. It maintains its consistency under severe working conditions and resists oxidation.

| Part | Container | Units |
|--------|-----------------|----------|
| Number | Size | Per Case |
| SL3586 | 14 oz cartridge | 10 |



NEW GENERATION™ WHEEL BEARING GREASE

For Disc and Drum Brakes

Meets late-model high-tech specifications. NLGI-2 GC-LB lithium complex base. Wide temperature range of -40°F to 325°F. Use on late-model wheel bearings, chassis and suspension points.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3110 | 14 oz cartridge | 10 |
| SL3111 | 14 oz can | 12 |



SODIUM-BASED

HEAVY DUTY DRUM BRAKE

Wheel Bearing Grease

For drum brakes and slow speed bearings. NLGI-2.5 sodium base. Ideal for use where heavy loads and slow speeds are prevalent. Drop point: 360°F.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3131 | 14 oz can | 12 |
| SL3136 | 7 lb pail | 4 |



ALUMINUM COMPLEX-BASED

BALL & ROLLER BEARING

Hi-Temp Grease

NLGI-2 grease. Made to handle high loads and high temperatures inherent in bearing applications. Combines moderately high oil viscosity with low temperature pumpability to provide high performance in a wide operating range. Won't wash out, splatter or run out under the heaviest loads. Resists mild detergent and alkaline wash.

| Part | Container | Units |
|---------|-----------------|----------|
| Number | Size | Per Case |
| SI 3630 | 1/Loz cartridge | 10 |

MULTI-PURPOSE FOOD GRADE GREASE

NSF H1 Registered. Aluminum complex, NLGI-2 grease. Meets FDA regulation 21 CFR 178.3570 for incidental food contact. Appropriate for food processing and handling equipment. Will not pound out of bearings and bushings during shock loads.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL35600 | 14 oz cartridge | 10 |
| SI 35605 | 35 lb pail | 1 |

HI-TEMP DISC BRAKE

Wheel Bearing Grease

For high temperature, high speed bearings. NLGI-2 aluminum complex base. For use on disc brake systems, chassis points and suspension systems. Drop point: 500°F.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3160 | 14 oz cartridge | 10 |
| SL3161 | 14 oz can | 12 |
| SL3165 | 35 lb pail | 1 |
| SL3166 | 7 lb pail | 4 |

MARINE BOAT TRAILER AND 4x4 WHEEL BEARING GREASE

Aluminum complex, NLGI-2 grease. Excellent water resistance. Superior rust and corrosion protection. Typical drop point: 500°F.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| SL3120 | 14 oz cartridges | 10 |
| SL3121 | 14 oz can | 12 |
| SL3125 | 35 lb pail | 1 |
| SL3127 | 120 lb keg | 1 |
| SL3184 | 3-3 oz cartridge | 6 |



SILICA)

SYNTHETIC FOOD GRADE GREASE

NSF H1 Registered for incidental food contact. NLGI-2 lubricating grease formulated with the highest quality synthetic NSF registered raw materials available. Performs extremely well in cold temperature applications as the base fluid exhibits a very low pour point. Resists rust and oxidation. Water wash-down resistant. Wide temperature range – provides superior lubrication from -20°F to 350°F.

| Part | Container | Units |
|---------|-----------------|----------|
| Number | Size | Per Case |
| SL35610 | 14 oz cartridge | 10 |




CALCIUM SULFONATE

EXTREME DUTY FOOD GRADE GREASE

NSF H1 Registered for incidental food contact. NLGI-2 high performance lubricating grease excels in applications where resistance to water washout and broad operating temperatures are absolutely necessary. Provides unsurpassed resistance to extreme pressures and corrosion, including salt spray. Timken OK Load of 65 lbs. Wide temperature range – provides superior lubrication from -20°F to 400°F.

| Part | Container | Units |
|---------|-----------------|----------|
| Number | Size | Per Case |
| SL35615 | 14 oz cartridge | 10 |



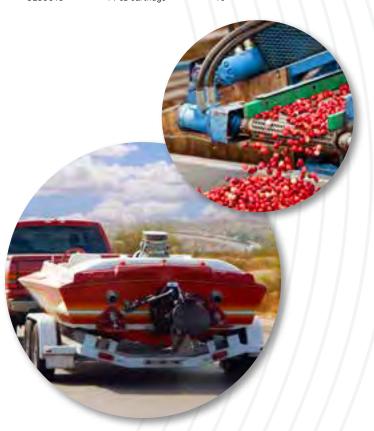



| NSF H1 Food Grade Grease | NSF Registration | NLGI Grade | Base Oil | Base 0il Viscosity@40°C | Thickener | Drop Point °F | Worked Penetration |
|---------------------------------|------------------|------------|----------|----------------------------|--------------------------------|---------------|-----------------------|
| Multi-Purpose Food Grade Grease | H1 | 2 | Mineral | 64-70 | Aluminum Complex | 500 | 265-295 |
| Synthetic Food Grade Grease | H1 | 2 | PAO | 60-65 | Silica | 650 | 265-295 |
| Extreme Duty Food Grade Grease | H1 | 2 | Mineral | 100-120 | Overbased Calcium Sulfonate | 572 | 265-295 |

| | THE | | gle. | Waking le | Mater Ref | jstenes Tinken d | A Ball Pul | 8 % |
|---|---------------------|-------|---------------|--------------------|--------------|---------------------|------------|--|
| Product | chease type | Meder | Calar | Working | Water K | Tinken | A Ball E | Additives |
| Super White™ Multi-Purpose Grease | Lithium | 1.5 | White | 0°F to 300°F | Good | 25 lbs | ND | Whitening Agents, Anti-Rust, Anti-Oxidant, Anti-Wear |
| Lithium General Purpose Grease | Lithium | 2 | Amber | 0°F to 250°F | Very Good | ND | ND | NA |
| Constant Velocity Joint Grease | Lithium | 1 | Dark Gray | 10°F to 275°F | Good | 50 lbs | ND | Extreme Pressure, Anti-Wear, Rust and Oxidation Inhibitors |
| Moly-Graph® Extreme Pressure Multi-Purpose Grease | Lithium | 2 | Dark Gray | -25°F to 250°F | Very Good | 45 lbs | 250 | Extreme Pressure, Molybdenum Disulfide, Anti-Wear, Anti-Rust, Anti-Oxidant |
| Extreme Pressure Engine Assembly Lube | Lithium | 0.5 | Black | 0°F to 250°F | Good | NA | ND | Extreme Pressure, Molybdenum Disulfide, Anti-Rust, Anti-Wear, Tackifier, Anti-Oxidant |
| Silaramic [®] Brake System Grease | Synthetic | 2 | Off White | -50°F to 3000°F | Excellent | NA | NA | Anti-Wear, Anti-Rust |
| Permatherm™ High Temp Synthetic Grease | Synthetic | 1.5 | Amber | -40°F to 400°F | Very Good | 50 lbs | ND | Anti-Wear, Anti-Oxidant, Anti-Rust |
| Driller Red Grease | Lithium Complex | 2 | Red | -10°F to 400°F | Excellent | 80 lbs | 315 | Anti-Rust, Anti-Wear, Extreme Pressure |
| Sta-Plex™ Extreme Pressure Premium Red Grease | Lithium Complex | 2 | Red | -20°F to 325°F | Excellent | 60 lbs | 500 | Extreme Pressure, Anti-Wear, Anti-Rust, Anti-Oxidant, Tackifier |
| New Generation™ Wheel Bearing Grease for Disc and Drum Brakes | Lithium Complex | 2 | Amber | -40°F to 325°F | Very Good | 50 lbs | 250 | Extreme Pressure, Anti-Wear, Anti-Rust, Tackifier |
| Synthetic Brake Caliper Grease | Synthetic | 2 | Black | -30°F to 600°F | Good | 60 lbs | ND | Molybdenum Disulfide, Extreme Pressure, Anti-Seize Polymers, Lubrication Fortifiers including PTFE |
| Lectra Lube™ Electric Motor Grease | Polyurea | 2 | Blue Green | 0°F to 400°F | Excellent | 50 lbs. | 400 | Extreme Pressure, Anti-Wear |
| Heavy Duty Drum Brake Wheel Bearing Grease | Sodium | 2.5 | Dark Amber | 10°F to 250°F | Moderate | ND | ND | Anti-Oxidant |
| Ball & Roller Bearing Hi-Temp Grease | Aluminum Complex | 2 | Dark Gray | 0°F to 325°F | Excellent | 40 lbs | 250 | Extreme Pressure, Molybdenum Disulfide, Anti-Wear, Anti-Rust, Anti-Oxidant |
| Hi-Temp Disc Brake Wheel Bearing Grease | Aluminum Complex | 2 | Dark Gray | 0°F to 325°F | Excellent | 60 lbs | 315 | Rust and Oxidation Inhibitors, Anti-Wear, Extreme Pressure, Molybdenum Disulfide, Graphite |
| Marine Boat Trailer and 4x4 Wheel Bearing Grease | Aluminum Complex | 2 | Blue | 0°F to 325°F | Excellent | ND | ND | Anti-Rust, Polymer Adhesives |

NA = Not Applicable; ND = Not Determined

GENERAL PURPOSE SILICONE MOLD RELEASE

A general purpose mold release used for a variety of applications including injection molding, compression molding, blow molding, and extruding. Provides fast and easy part removal from molds. Medium duty silicone content 3.5%. Ideal for use on cold and hot metals.

| Part Number | Container Size | Units Por Cook | |
|----------------|-------------------|-------------------|--|
| Number | Size | Per Case | |
| 03300 | 16 oz aerosol | 12 | |



LECITHIN MOLD RELEASE

Non-silicone mold release helps assure multiple releases and will not interfere with parts to be painted, bonded, heat sealed or laminated. Lecithin Mold Release imparts a smooth dry, non-toxic film. No special cleaning required before part decoration.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03306 | 16 oz aerosol | 12 |



FOOD GRADE SILICONE MOLD RELEASE

Formulated to be used for light duty applications. Contains the same high-quality ingredients as our General Purpose Silicone Mold Release. Light duty silicone content 3%. NSF M1 Registered

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 03301 | 16 oz aerosol | 12 | |



BORON NITRIDE MOLD RELEASE

Ideal when working with the latest high temperature resins. It is also an excellent release for die-casting of low melting point metals such as lead, zinc and aluminum. Forms a non-reacting layer with molten metals, salts, fluxes and slags. High electrical resistance and thermal conductivity.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 03310* | 16 oz aerosol | 12 | |



HEAVY DUTY SILICONE MOLD RELEASE

Superior lubrication that provides maximum releases. Formulated for difficult to remove molded parts. Heavy duty silicone content 5%. Helps avoid molding material build-up.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 03302 | 16 oz aerosol | 12 | |



HEAVY DUTY MOLD CLEANER

Safety-solvent designed to quickly dissolve and remove silicone, grease, oil and residue on mold surfaces. Fast evaporating formulation is ideal for cleaning cold molds. Non-flammable, chemically stable, non-conductive and non-corrosive.

| Part | Container | Units | |
|--------|---------------|----------|--|
| Number | Size | Per Case | |
| 03315 | 16 oz aerosol | | |



FOOD GRADE MOLD RELEASE WO

Silicone-free, paintable mold release is perfect for use in medical and food packaging applications. The pure white oil based formula makes it an excellent all-purpose mold release. NSF H1, M1 Registered. Safe for use on most plastics.

| Part | Container | Units | |
|--------|-----------------------------|----------|--|
| Number | Size | Per Case | |
| 03311 | 16 oz aerosol w/Perma-Lock® | 12 | |



^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

| MOLD RELEASE CHARACTERISTICS | #03300 General Purpose | #03301 Food Grade | #03302 Heavy Duty | #03311 Food Grade W0 | #03306 Lecithin | #03310 Boron Nitride |
|--|---------------------------|----------------------|----------------------|-------------------------|--------------------|-------------------------|
| No ozone depleting chemicals | • | • | • | • | • | • |
| Will not interfere with bonding | | | | • | • | |
| Ultrasonic welding compatible | | | | • | • | • |
| Recommended for medical molding | | | | • | * | |
| Safe on solvent sensitive plastics | • | • | • | • | * | • |
| Odorless | • | • | • | • | * | • |
| MOLD RELEASE / RESIN RECOMMENDATION | #03300 General Purpose | #03301 Food Grade | #03302 Heavy Duty | #03311 Food Grade W0 | #03306 Lecithin | #03310 Boron Nitride |
| ABS | • | • | • | • | • | • |
| Acetal | • | • | • | • | * | • |
| Acrylic | • | • | • | • | * | • |
| Noryl® | • | | • | * | | |
| Nylon | • | • | • | • | * | |
| Polycarbonate | • | * | • | * | • | • |
| Polyethylene | | | | • | • | |
| Polypropylene | | | | • | * | |
| Polystyrene | • | • | • | • | * | • |
| Polysulfone | • | • | • | • | • | |
| Rubber | • | • | • | • | • | |
| Wax | • | • | • | • | | |

This release/resin recommendation chart is intended to be a general guide based on field testing performed over the last 45 years. Always pre-test any release with a particular resin. Mold configuration and conditions can greatly affect part release ability.

| Product | 4Ae | THE OF FIFT | Paint Con | Terificative Terificative | s.D.I.L.® | Golfdiner Size |
|--|---------------|-------------|-----------|---------------------------|-----------|----------------|
| General Purpose Silicone Mold Release | Silicone | Non-Drying | No | Up to 600°F | Yes | 16 |
| Food Grade Silicone Mold Release | Silicone | Non-Drying | No | Up to 600°F | Yes | 16 |
| Heavy Duty Silicone Mold Release | Silicone | Non-Drying | No | Up to 600°F | Yes | 16 |
| Food Grade Mold Release WO | Mineral Oil | Non-Drying | Yes | Up to 400°F | Yes | 16 |
| Lecithin Mold Release | Lecithin | Non-Drying | Yes | Up to 500°F | Yes | 16 |
| Boron Nitride Mold Release | Boron Nitride | Dry | Yes | Up to 800°F | Yes | 16 |
| Heavy Duty Mold Cleaner | Chlorinated | NA | NA | NA | Yes | 16 |

NA = Not Applicable

Noryl® is a registered trademarks of General Electric Corporation

WORKER SAFETY

FIRE ANT KILLER

Fast-acting, highly effective insecticide used to kill fire ants. Product offered in an aerosol version or long-lasting granules. The aerosol version kills on contact, is safe on most plastics, contains no chlorinated solvents. High dielectric strength of 47,600 volts.

| Part | Container | Units |
|--------|-----------------------|----------|
| Number | Size | Per Case |
| 140371 | 20 oz aerosol trigger | 12 |

The granules are ready to use and kill the queen within 24 hours. Prevents new fire ant mounds from forming. Non-corrosive, non-conductive. 4 oz. single-use pouch treats up to 12" x 12" area.

| Part | Container | Units |
|--------|-------------|----------|
| Number | Size | Per Case |
| 140391 | 4 oz packet | 40 |







WASP & HORNET KILLER PLUS™

Insecticide

Fast acting, high strength insecticide that knocks down and kills wasps, hornets, fire ants, black widow spiders and scorpions on contact. Contains no chlorinated solvents. Safe on most plastics. CRC trigger provides a dense, accurate spray that will reach up to 20 feet to drench harmful insects and their nests. High dielectric strength of 47,600 volts. Extension tube doubles as a locking mechanism.

| Part | Container | Units |
|--------|--------------------------|----------|
| Number | Size | Per Case |
| 14010 | 20 oz aerosol trigger | 12 |



FR (FLAME RESISTANT) CLOTHING INSECT REPELLENT

Repellent for the treatment of flame resistant clothing. Provides a protective barrier against mosquitoes, gnats, chiggers, ticks, biting flies and other flying insects. Contains Permethrin which is a contact insecticide that not only repels but also kills insects. It will not damage or negatively affect the protection properties of flame resistant clothing. Binds to fabric and protects up to two weeks, even through washing. Convenient aerosol package provides easy and controlled application of product. Conforms to ASTM F2621-06 Standard Practice for Determining Response Characteristics and Design Integrity of Arc Rated Finished Products in Electric Arc Exposure. Non-flammable, non-DEET formula is safe for clothing. Do not apply to skin.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 14036 | 8 oz aerosol | 12 |



BEE BLAST® with Residual Wasp & Hornet Killer

Fast-acting, high strength insecticide that instantly soaks harmful insects and their nests with a high output 20' jet blast. Bee Blast® contains no chlorinated solvents and is safe on most plastics. High output 20' jet blast kills wasps, hornets, yellow jackets and bees on contact. Safety Data Label S.D.[L.]® right on the can – a CRC exclusive. High dielectric strength of 47,300 volts. Kills with residual action as wasps and hornets return to nests.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 14009 | 20 oz aerosol | 12 |

INSECT REPELLENT

Insect Repellent uses a high strength formula to repel mosquitoes, gnats, chiggers, fleas, ticks, biting flies and other biting insects up to twice as long as common consumer insect repellents. Insect Repellent protects outdoor workers by reducing the risk of contracting Lyme Disease from ticks when sprayed on exposed skin and clothing.. Convenient aerosol package. Contains 25% active ingredient (DEET). The only insect repellent in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. Safe on most plastics.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 14011 | 8 oz aerosol | 12 |



14010, 14009, 14037, 14039, 14036 and 14011 are not registered outside the United States and Puerto Rico.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

TESTING

SMOKE TEST® Smoke Detector Tester

Convenient, easy and safe product to test the functional ability of a smoke detector. Smoke Test® also checks for obstructions or debris, which clog detector vents and prevents smoke from properly entering the sensing chamber. Simulates smoke to provide a true, functional test for smoke detectors. Aerosol spray extends user reach up to 6', allows testing to be done while standing safely on the floor. No harmful residue, plastic safe, non-staining. Contains no Class I or Class II Ozone Depleting Chemicals. UL® Listed.

| . Part | Container | Units |
|--------|--------------|-----------|
| Number | Size | SPer Case |
| 02105* | 6 oz aerosol | 12 |



CRC Leak Detector is formulated for the quick and easy site detection of gas leaks and air leaks. Reliably locates gas leaks and pressure losses in pipes and pressurized systems by forming highly visible bubbles when applied over any leak. The water-based formula contains no oils, silicones or harmful solvents. Highlights all leaks, even under low pressure. Non-flammable aerosol package enables fast and easy application with no waste or spillage. No odor. NSF P1 Registered.

| Part Number | | |
|----------------|---------------|----|
| 14503 | 20 oz aerosol | 12 |



WELD CHECK®

A 3-part system used to detect cracks & imperfections on welded surfaces and structures. Consisting of a quick drying cleaner, penetrant & developer, this system is used for the non-destructive testing of metal surfaces by liquid penetration method.

Weld Check® Weld Cleaner & Penetrant Remover

A fast drying, powerful solvent blend cleaner designed for the pretreatment of a weld surface, prior to liquid penetration inspection, and to remove all visible, colored traces of penetrant from weld.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03108* | 16 oz aerosol | |

Weld Check® Penetrant

A red-dye liquid penetrant for seeking out and identifying cracks and imperfections, when used in conjunction with Weld Check® Developer. Many cracks in welded materials can be deep in spite of having a very small opening width on the surface and can cause very serious defects. By normal visual inspection, such cracks may be very difficult to detect, but penetrant flaw detection is an extension of the visual inspection method.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 03106* | 16 oz aerosol | 12 |

CRC In Deck

Weld Check® Developer

A quick drying developer draws penetrant out of the imperfections of the surface with a dispersion of a white powder in a fast evaporating solvent. With visible dyes, the vivid color contrast between the penetrant and the developer makes the 'bleed-out' easy to see.





UL® is a registered trademark of UL LLC.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.







CRC's Industrial Hand Cleaners contain premium cleansing agents which quickly remove the toughest dirt. Pumice scrubbing particles safely and effectively remove dirt, grease, resin, ink, paint, and glue.

| Part | | Container | Units |
|--------|-----------|-------------------------|----------|
| Number | Fragrance | e Size | Per Case |
| SL1218 | Cherry | 1 gallon hand pump | 4 |
| SL1219 | Cherry | 1 gallon refill | 4 |
| SL1220 | Grape | 1 gallon hand pump | 4 |
| SL1221 | Grape | 1 gallon refill | 4 |
| SL1222 | NA | hand cleaner wall mount | 1 |

MECHANIX ORANGE™ Citrus Lotion Hand Cleaner with Pumice

Formulated with the natural cleaning power of citrus. This fast, yet gentle hand cleaner is pH balanced, highly concentrated and very effective at cleaning the toughest soil, grime, ink, oil and paint. Use with or without water. Contains no harsh solvents. Biodegradable formula has a fresh citrus scent.

| Part Number | Container Size | Units Per Case |
|----------------|------------------------|-------------------|
| SL1712 | 16 fl oz bottle | 12 |
| SL1719 | 1 gallon bottle w/pump | 4 |

LANOLIN CREAM & PUMICE HAND CLEANER

An extra-tough formula with buffing-grade pumice for deep-cleaning power. Use with or without water. For use in industrial plants, farms, mines, construction sites and anywhere hands get dirty and soiled. Leaves hands feeling clean with lanolin and lemon scent.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| SL1621 | 14 oz can | 12 |



HAND CLEANER TOWELS These shop-sized pre-moistened, heavy duty towels with

pumice scrubbing power work fast to loosen, dissolve and absorb dirt and grease. Hand Cleaner Towels are absorbent, non-scratching, easy to use and are fortified with emollients for the skin.

| Part | Towel | Towels | Containers |
|--------|----------------|---------------|------------|
| Number | Size | per Container | per Case |
| 04100 | 10.5" x 12.25" | 72 | |





SURE SHOT® REUSABLE SPRAYER

An all-metal, one quart, reusable air-pressurized sprayer. For use with most bulk lubricants, solvents and corrosion inhibitors.

| Part | Units |
|--------|----------|
| Number | Per Case |
| 14016 | 111 |



HEAVY DUTY LEVER GREASE GUN

3-way easy loading for standard 14 oz cartridges. Provides 10,000 lbs of pressure. Short stroke feature for confined areas. Sure-grip knurled barrel. Heavy duty thick wall steel construction.

| Part | Units |
|---------|----------|
| Number | Per Case |
| SL37019 | 1 |

EMPTY TRIGGER BOTTLE

New 24 oz design improves stability while Level III fluorination provides maximum durability. Features blank lines and charts for product and safety information.

| Part | Units |
|--------|----------|
| Number | Per Case |
| 14021 | 12 |



GREASE GUN FLEX HOSE

Replacement flexible hose in 12" length. For pistol grip or lever type grease guns. Working pressure 3,000 psi.

| Part | Units |
|---------|----------|
| Number | Per Case |
| SL46022 | 10 |

FLUID OIL PUMP

Constructed of durable PVC plastic. For all fluid reservoirs including differentials, transmissions and gear cases. Dispenses 1fl.oz. of product with each depression. Designed to fit all Sta-Lube quart, half-gallon and gallon containers. Not for use with brake fluid.

| Part | Units |
|---------|----------|
| Number | Per Case |
| SI 4344 | 6 |



POLY TANK SPRAYER

Designed for professional use. Easy to use, holds 1 gallon. Excellent corrosion resistance. High density polyethylene. Equipped with a 36" reinforced multi-layer PVC braided hose and adjustable nozzle. Replacement parts available.

| Part | Units |
|--------|----------|
| Number | Per Case |
| MK1991 | 1 |



SureShot® is a registered trademark of Milwaukee Sprayer Mfg. Co.


ALL-PURPOSE ENAMEL SPRAY PAINT

Remarkably versatile, general purpose, quick-dry, non-fading coating for use in exterior and interior applications. Recommended for general use in every day factory and contractor applications.

The only paint in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. Resistant to heat up to 180°F (82°C). Dries tack free in 10 to 20 minutes and fully dry in less than 1 hour. Recoat within 2 hours or after 24 hours. Yellows and reds cover 10-12 sq. ft. per can, others cover 16-22 sq. ft. per can. Good resistance to abrasion and corrosion; fair resistance to solvents.

Available in a wide range of colors. Compliant with state and federal aerosol coatings VOC regulations. Vinyl toluene oil enamel resin system.

SPRAY PAINT COLORS

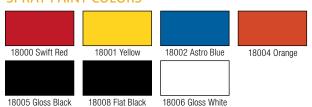

| Part Number | Color | Container Size | Units Per Case |
|----------------|-------------|-------------------|-------------------|
| 18000* | Swift Red | 16 oz aerosol | 6 |
| 18001* | Yellow | 16 oz aerosol | 6 |
| 18002* | Astro Blue | 16 oz aerosol | 6 |
| 18004* | Orange | 16 oz aerosol | 6 |
| 18005* | Gloss Black | 16 oz aerosol | 6 |
| 18006* | Gloss White | 16 oz aerosol | 6 |
| 18008* | Flat Black | 16 oz aerosol | 6 |

RUST PROOF ENAMEL **SPRAY PAINT & PRIMER**

Rust resistant, premium quality alkyd enamel, and the premier corrosion fighter in the marketplace. Rust Proof Enamel is designed for moderate to severe corrosive environments and is specially formulated to resist rusting, peeling and fading. Fights weathering, salt spray and the most severe and demanding industrial conditions.

The only paint in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. Dries tack free in 15 to 30 minutes and fully in 1 hour, recoat anytime. Resistant to heat up to 300°F (149°C).

Yellows and reds cover 15-18 sq. ft. per can, others cover 22-30 sq. ft. per can. Coverage increases when CRC Rust Proof Enamel Primer is used. Excellent resistance to corrosion and solvents and good resistance to abrasion. CRC Rust Proof Primers seal out moisture and fill hairline cracks and other slight surface imperfections to provide a uniform basecoat for CRC Rust Proof Enamels.

Available in a wide range of colors including OSHA and machinery matches. Compliant with state and federal aerosol coatings VOC regulations. Modified chain stop alkyd enamel resin system.

SPRAY PAINT COLORS

Caution and physical

Designates traffic

18100 OSHA Red

18101 OSHA Yellow 18102 OSHA Blue 18106 OSHA White

ates traffic and

Part

PRIMER

Units

18105 OSHA Black 18109 Flat Black

18114 Machinery Light Gray

Container

18150 Grav

| 008* | Flat Black | 16 oz aerosol | 6 | Number | Color | Size | Per Case |
|------|------------|----------------|---|--------|-------------------------|---------------|----------|
| 000 | FIAL DIALK | 10 02 de10501 | O | 18100* | OSHA Red | 20 oz aerosol | 6 |
| | | | | 18101* | OSHA Yellow | 20 oz aerosol | 6 |
| | | | | 18102* | OSHA Blue | 20 oz aerosol | 6 |
| | | | | 18105* | OSHA Black | 20 oz aerosol | 6 |
| | | | | 18106* | OSHA White | 20 oz aerosol | 6 |
| | | | | 18109* | Flat Black | 20 oz aerosol | 6 |
| | | | | 18114* | Machinery Light Gray | 20 oz aerosol | 6 |
| | | 8 | | 18150* | Gray Primer | 20 oz aerosol | 6 |
| 4 | | | | | | | |
| | /E = | -/ -/// | | | | | |

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.




UPSIDE DOWN MARKING PAINT

These paints clearly and effectively mark the location of underground utilities and are the professionally preferred markers at construction sites. Colors meet the A.P.W.A One Call International Color Standards. Particularly safe on turf grass, fields and golf courses.

The only paint in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. One can covers up to 700 linear feet with a 1 to 3 inch bright vivid line width. Lead free formula won't harm grass. Nonclogging nozzle & unique spray head is easy to use, less finger fatigue. Twist cap prevents accidental discharge. Dries fast and tack free in 2 to 5 minutes.

SPRAY PAINT COLORS



| Part Number | Color | Container Size | Units Per Case |
|----------------|------------------------|-------------------|-------------------|
| 18200* | Safety Red | 20 oz aerosol | 6 |
| 18201* | Caution Yellow | 20 oz aerosol | 6 |
| 18202* | Caution Blue | 20 oz aerosol | 6 |
| 18203* | Safety Green | 20 oz aerosol | 6 |
| 18204* | Alert Orange | 20 oz aerosol | 6 |
| 18206* | White | 20 oz aerosol | 6 |
| 18207* | Red Fluorescent | 20 oz aerosol | 6 |
| 18208* | Orange Fluorescent | 20 oz aerosol | 6 |
| 18210* | Red/Orange Fluorescent | 20 oz aerosol | 6 |

The Occupational Safety and Health Act (OSHA) stipulates that industrial plants provide color coded safety equipment in the workplace. OSHA also requires that hazardous areas be identified with certain colors. CRC provides a range of OSHA colors for the correct application and safety.

These reflective and durable paints are formulated using glass microsphere technology. The water based polyurethane resin, extremely fade resistant pigments and reflective glass spheres ensure years of bright reflection. These products are useful to mark safety hazards or objects which need to be located in low-light or dark areas: fire hydrants, industrial equipment, safety equipment, guard rails, electrical switch boxes, gas meters, boat piers, docking buoys, to name a few. They reflect brightly back to the source of light using a flashlight or headlights.

| Part Number | Color | Container Size | Units Per Case |
|----------------|--------------------|-------------------|-------------------|
| 18015* | Aluminum Base Coat | 16 oz aerosol | 6 |
| 18016* | Yellow Top Coat | 16 oz aerosol | 6 |
| 18017* | Red Top Coat | 16 oz aerosol | 6 |
| 18018* | Clear Top Coat | 16 oz aerosol | 6 |







Safety Anti-Slip Paint produces a textured coating eliminating dangerous, slick surfaces in just one coat. Resistant to oil, gas, and most chemicals. Quality epoxy resin formula stands up in tough industrial applications. Adheres to wood, fiberglass, cement and most metals. Convenient aerosol applications. Use as a finish coat and recoat every 2-4 months based on traffic.

| Part Number | Color | Container Size | Units Per Case |
|----------------|--------|-------------------|-------------------|
| 18024* | Clear | 16 oz aerosol | 6 |
| 18025* | Yellow | 16 oz aerosol | 6 |
| 18026* | Black | 16 oz aerosol | 6 |
| 18027* | White | 16 oz aerosol | 6 |
| | | | |

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

AVIATION DEGREASER

A halogenated solvent-based degreaser that is chemically stable and extremely effective in heavy duty cleaning applications. It is fast acting, non-flammable and evaporates quickly leaving no residue. Meets performance requirements of Boeing D6-17487 and Douglas CSD-1, Category II with the exception of acrylic crazing.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 10900¹ | 20 oz aerosol | 12 |

AVIATION C.I.C. REMOVER

Revolutionary alternative to 1,1,1-Trichloroethane and other chlorinated solvents that effectively removes grease, oil, dirt and other contaminants from aircraft interior surfaces and equipment. Low odor compound. High flash point: 185°F. Chemically stable, non-conductive and non-corrosive. Controlled evaporation for enhanced cleaning action. Passes the performance tests of Boeing's Spec D6-17487, Rev. P-solvent degreasers.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| | 0.20 | |
| 10480 | 20 oz aerosol | 12 |

AVIATION XT-2000™ PRECISION CLEANER

A non-flammable, low odor, rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment. No flash point. Evaporates rapidly leaving no residue. Chemically stable, non-conductive and non-corrosive. Safe on most plastics. Meets performance requirements of Boeing D6-17487. Approved by Pratt & Whitney for use in SPOP1&6.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 10315 🚺 | 16 oz aerosol | 12 |

AVIATION QUICK DRY PRECISION CLEANER

Effectively removes contaminants from electrical and electronic components and contacts. Ideal for applications where rapid evaporation is desired and flammability is not an issue. Harmless to most sensitive plastics. Evaporates rapidly, leaves no residue. Displaces moisture. Meets performance requirements of Boeing D6-17487 and McDonnell Douglas CSD-1 specifications.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 10340 🚺 * | 16 oz aerosol | 12 |



AVIATION T-FORCE® DEGREASER

Effective heavy duty, non-flammable degreaser. Evaporates quickly and leaves no residue. Airframe approved non-HAP degreaser. Meets performance requirements of Boeing D6-17487.

| Part | Container | Units |
|--------------------|---------------|----------|
| Number | Size | Per Case |
| 10321 ¹ | 20 oz aerosol | 12 |

AVIATION 3-36®

Corrosion Inhibitor

Meets MIL-C-81309E, Amendment 3, Type III, Class 1 & 2 - Listed on the Military QPL Since 12/1999. This versatile, petroleum-based formula protects all metal surfaces leaving behind a corrosion inhibiting film. The low viscosity of Aviation 3-36® allows it to cover a large surface area and penetrate deep into the surface of all metals including steel, copper, brass and aluminum alloys. It displaces and seals out moisture and prevents the return of wear and corrosion. For use in applications that require compliance to MIL-C-81309E.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 10200 | 16 oz aerosol | 12 |



AVIATION NEXT GENERATION DEGREASER

Quickly dissolves grease, oil and sludge for efficient operation of mechanical equipment. No flash or fire point. Non-chlorinated, non-conductive, non-corrosive and non-staining. Meets performance requirements of Boeing D6-17487.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 103221 | 20 oz aerosol | 12 |




A modern blend of detergents designed to safely clean aircraft glass and mirrors. Safe on electronic display panels. Removes grease, fingerprints, scum and smoke haze from surfaces. Contains no alcohol or ammonia. Meets the performance requirements of AMS-1534A.


| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 10420 | 16 oz aerosol | 12 |







^{1 -} Item restricted from sale in some states. See product page on CRC website for specific restrictions. *This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.





CLEANERS

BRĀKLEEN®

Brake Parts Cleaner

Quickly removes brake fluid, grease, oil and other contaminants from brake linings and pads. Helps brakes last longer and perform more efficiently.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------------|-------------------|
| 05089 ¹ | 20 oz aerosol | 12 |
| 05089T1 | 20 oz aerosol w/trigger | 12 |
| 05090 ¹ | 1 gallon bottle | 4 |
| 050911 | 5 gallon pail | 1 |
| 05093 ¹ | 55 gallon drum | 1 |



BRĀKLEEN®

Non-Chlorinated Brake Parts Cleaner

Cleans fast, dries fast, leaves no residue. Instantly removes brake fluid, grease & oil. SCAQMD Rule #1171 compliant. Contains no chlorinated solvents. $\textit{Ultra-Low VOC formula.}^{\circ}$

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 05151* | 20 oz aerosol | |



BRĀKLEEN®

Non-Chlorinated Brake Parts Cleaner

Use where compliance calls for a chlorine-free product. Quickly removes brake fluid, grease, oil and other contaminants from brake linings and pads.

| Part Number | Container Size | Units Per Case |
|------------------|-------------------|-------------------|
| 050881* | 20 oz aerosol | 12 |
| 050851* | 1 gallon bottle | 4 |
| 051861* | 5 gallon pail | 1 |
| 050871* | 55 gallon drum | 1 |
| Less than 45% VC | OC [∞] | |
| 050841* | 20 oz aerosol | 12 |
| 050861* | 5 gallon pail | 1 |



MASS AIR FLOW

Sensor Cleaner

Safely cleans and protects mass air flow sensors. Plastic safe, dries rapidly and leaves no residue. Increases horsepower, gain 4 to 10 horsepower after using. Reduces rough idle.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| | | |



BRĀKLEEN®

Brake Parts Cleaner, 50 State Formula

Removes brake fluid, grease, oil and other contaminants quickly & effectively. Non-chlorinated. Degreases instantly. Leaves no residue. Meets all state & federal consumer products VOC regulations. Low VOC formula.[∞]

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 050502* | 20 oz aerosol | 12 |
| 050512* | 1 gallon bottle | 4 |
| 050522* | 5 gallon pail | 1 |
| 050532* | 55 gallon drum | 1 |



ENGINE DEGREASER

Citrus Formula

Powerful citrus cleaning formula. Dissolves and lifts off the toughest grease and road grime. Low VOC formula.c

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| 05027 🚺 | 20 oz aerosol | 12 |







∞ – As defined by Consumer Products VOC regulations.

^{1 –} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

^{2 -} Item restricted from sale in SCAOMD

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

ENGINE DEGREASER

Gel Formula

Penetrates fast and removes the most stubborn baked on engine greases and road grime. Formula clings to all surfaces allowing it to penetrate deep. High visibility yellow color shows where it has been applied. When rinsed with water it emulsifies and washes away the grease. Low VOC formula.[∞]

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 05026 | 20 oz aerosol | |



CLEAN-R-CARB™

Carburetor Cleaner

Instantly dissolves deposits on venturies, linkages, butterflies and PCV systems. Improves fuel system performance. Harmless to catalytic converters and oxygen sensors.

| Container Size | Units Per Case |
|-------------------|--|
| 16 oz aerosol | 12 |
| 20 oz aerosol | 12 |
| 20 oz aerosol | 12 |
| | Size 16 oz aerosol 20 oz aerosol |



FNGINF DFGRFASFR

Quickly lifts grease and grime off engines for cooler, more efficient running. Leaves no residue. Easy to use: spray on, rinse off.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 050251 | 20 oz aerosol | 12 |
| 05025CA | 20 oz aerosol | 12 |



LUBRICANTS

FREEZE-OFF®

Super Penetrant

Freezes and cracks rust for deep penetration and fast results. Dissolves rust, gum and corrosion. Lubricating film residue displaces water and prevents corrosion. Low VOC formula. $^\infty$

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 05002 🗗 * | 20 oz aerosol | 12 |



THROTTLE BODY & AIR-INTAKE CLEANER

Removes gum and varnish from throttle valves and throttle body for easier starting and smoother engine performance. Low VOC formula. $^{\infty}$ Eliminates hesitation and rough idling.

| Part | Container | Units |
|-----------|---------------|----------|
| Number | Size | Per Case |
| 05078 🕩 * | 16 oz aerosol | 12 |



DE-SQUEAK™

Brake Conditioning Treatment

Prevents brake noise. Contains aluminum and graphite to plate and protect metal surfaces up to temperatures of 1800°F. Prevents rust and oxidation on drums, rotors and lug nuts. For use on disc, drum and ABS systems.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 05080* | 20 oz aerosol | 6 |






Forms a water resistant, high temperature film that instantly absorbs noise and quiets disc brake squeaks and squeals. Easy to apply to new or previously installed pads.

| Part Number | Container Size | Units Per Case |
|--------------------|-------------------|-------------------|
| 05016 | 4 oz bottle | 12 |
| 05017 ¹ | 12 oz aerosol | 12 |





^{1 –} Item restricted from sale in some states. See product page on CRC website for specific restrictions.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

FUEL ADDITIVES

MOTOR TREATMENT

Instantly cleans power-robbing carbon deposits, gums and varnish. Cleans and lubricates internal fuel and oil systems. Increases MPG and reduces emissions. Fuel stabilizer removes moisture from fuel and oil.

| Part | Container | Units |
|--------|-----------------------|----------|
| Number | Size | Per Case |
| 05316 | 16 oz non-aerosol can | 12 |



PREMIUM FUEL INJECTOR CLEANER

Prevents rust and corrosion. Meets BMW spec #88886900307 lifetime certificate for intake valve cleanliness. Controls deposits in port fuel injectors, intake valves, and fuel lines. Keeps injectors clean.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05062 | 12 oz bottle | 12 |



OCTANE BOOST

Lead Substitute

Increases octane by 2.5%-5.5% for maximum horsepower and torque. One bottle is sufficient to treat up to 20 gallons of fuel. Contains a smoke suppressant. Decreases NOx and carbon monoxide emission.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05077 | 12 oz bottle | 12 |



STOR-X[™] Fuel Stabilizer

Stabilizes fuel by inhibiting formation of varnishes, peroxides and gum. Preserves gasoline and diesel fuel for up to 1 year. Treats up to 20 gallons. Does not contribute to induction system deposits. OK for Biodiesel.

| Part | Container | Units |
|--------|-------------|----------|
| Number | Size | Per Case |
| 402815 | 8 oz bottle | 12 |



FUEL INJECTOR & CARBURETOR CLEANER

Removes deposits from injectors, carburetor and intake system. Reduces engine demand for high octane fuel. Harmless to catalytic converters and oxygen sensors.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05061 | 12 oz bottle | 12 |



GASOLINE 1-TANK POWER RENEW® with G2P® Technology

Concentrated one-tank cleanup for your dirty fuel system. Maximum power restoration and deposit control. Helps increase MPG. Boosts power instantly.

| Part | Container | Units |
|--------|------------|----------|
| Number | Size | Per Case |
| 05815 | 15 fl. oz. | 6 |







DIESEL FUEL ADDITIVES

DIESEL FUEL THERAPY®

Diesel Injector Cleaner Plus

Cleans injectors, conditions and stabilizes fuel and lubricates fuel system for increased engine life. Increases power and fuel economy and reduces emissions. ULSD approved. OK for Biodiesel.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 05212 | 12 oz bottle | 12 |
| 05232 | 1 quart bottle | 12 |
| 05228 | 1 gallon bottle | 4 |
| 05255 | 55 gallon drum | 1 |



BIO-CON™

Part

Number

05670

approved. OK for Biodiesel.

Diesel Water Remover

Sludge Sediment Remover

Removes sludge and sediment from diesel fuel and furnace oils. Absorbs and disperses moisture. Improves storage stability of fuel.

Dissipates water to minimize smoke and improve fuel economy.

Units

Per Case

Prevents corrosion and harmful sludge sediment. ULSD

Container

Size

12 oz bottle

| | Part umber | Container Size | Units Per Case |
|----|---------------|-------------------|-------------------|
| 0 | 5557 | 12 oz bottle | 12 |
| 0; | 5558 | 5 gallon pail | 1 |



DIESEL 1-TANK POWER RENEW® with G2P® Technology

Concentrated diesel and emissions system cleanup. Maximum power restoration and deposit control. Helps free sticky injectors and increases MPG. Works great in biodiesel blends.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 05832 | 1 quart bottle | 12 |
| 05816 | 16 oz bottle | 6 |





DIESEL FUEL THERAPY®

Diesel Injector Cleaner with Anti-Gel

Prevents diesel fuel from gelling in cold temperatures. Lowers pour point, cleans injectors and helps restore spray pattern for more efficient combustion. ULSD approved. OK for Biodiesel.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 05412 | 12 oz bottle | 12 |
| 05432 | 1 quart bottle | 12 |
| 05428 | 1 gallon bottle | 4 |
| 05425 | 5 gallon pail | 1 |
| 05455 | 55 gallon drum | 1 |



OIL ADDITIVES

VALVE-KLEEN™

Engine Valve & Lifter Cleaner

Dissolves sludge, gum and varnish on valves, lifters and oil passages and prevents new deposits from forming. Quiets noisy operation.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05331 | 12 oz hottle | 12 |



JUMP START®

Starting Fluid with Lubricity

Assures fast, economical starts in extremely cold or humid climates. Upper cylinder lubricant minimizes wear during cold starts. Effective to -65°F. For diesel and gasoline engines. ULSD approved.

| | Part | Container | Units |
|---|--------|---------------|----------|
| | Number | Size | Per Case |
| j | 05671* | 16 oz aerosol | 12 |



TRANSMISSION/POWER STEERING ADDITIVES

TRANS-KLEEN™

Automatic Transmission Treatment

Replaces the essential additives in transmission fluid that are depleted during normal operation. Smoothes uneven shift patterns. Eliminates hesitation.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05332 | 12 oz bottle | 12 |



COLD FLOW™

Anti-Gel with Lubricity

Prevents fuel gelling and waxing. Contains lubricity additive for low sulfur fuels. Formulated for cold weather use in all diesel equipment. ULSD approved. OK for Biodiesel.

| Container Size | Units Per Case |
|-------------------|--------------------------------|
| 12 oz bottle | 12 |
| 1 quart bottle | 12 |
| 55 gallon drum | 1 |
| | 12 oz bottle 1 quart bottle |



QUICK FLOW™

Emergency Diesel-Gel Relief

Instantly works to dissolve gelled fuel and thaws frozen fuel filters. Lowers pour point by as much as 35°F. ULSD approved. OK for Biodiesel.

| Part | Container | Units |
|--------|----------------|----------|
| Number | Size | Per Case |
| 05911 | 1 quart bottle | 12 |



WINTER PRODUCTS

FOR GAS TANKS

Isopropanol Formula

Removes water from gasoline. Protects down to -50°F. Inhibits rust in gas tank. Prevents fuel line freezing.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 05343 | 12 oz bottle | 12 |



ICE-OFF®

Windshield Spray De-Icer

Melts ice, snow and frost on contact. Harmless to car finish. Thaws frozen locks.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 05346 | 16 oz aerosol | 12 |



DIESEL AIR BRAKE ANTI-FREEZE & CONDITIONER

Provides complete winter protection for air brake systems. Eliminates and prevents moisture accumulation and icing. Prevents damage to air brake seals. Anti-freeze and anti-rust.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 05532 | 32 oz bottle | 12 |
| 05528 | 1 gallon bottle | 4 |
| 05555 | 55 gallon drum | 1 |



UNDERCOATING

RUBBERIZED UNDERCOATING

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 05347* | 20 oz aerosol | |



 $[\]infty$ – As defined by Consumer Products VOC regulations.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

LUBRICANTS

MARINE 6-56® Multi-Purpose Lube

Clear, thin film lubricates and protects against wear and saltwater corrosion. Drives out moisture to help start wet engines. Loosens rusted parts. Will not harm oxygen sensors.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 06005 🚺 | 6 oz aerosol | 12 |
| 06006 🚺 | 12 oz aerosol | 12 |
| 06007 🚺 | 16 oz aerosol | 12 |
| 06008 | 1 gallon bottle | 4 |
| 06010 | 5 gallon pail | 1 |



CORROSION INHIBITORS

SALT TERMINATOR®

Engine Flush, Cleaner & Corrosion Inhibitor

Dissolves destructive salt debris that can't be removed by water alone without leaving a residue. Leaves a protective coating, guarding against future corrosion. Biodegradable formula.

| Part Number | Container Size | Units Per Cas |
|----------------|-------------------------|------------------|
| SX32 | 32 fl oz bottle | 7 |
| SX32M | 32 fl oz bottle w/mixer | 6 |
| SX128 | 1 gallon bottle | 6 |
| SX55 | 55 gallon drum | 1 |
| SXMXR | mixer only | 12 |
| | | |



MARINE 6-56® Multi-Purpose Lube – Zero VOC®

Odor-free, zero VOC^∞ alternative. Drives out moisture that can cause electrical failures and hard starting. Penetrates deep through rust and corrosion to loosen frozen parts. Will not harm oxygen sensors.

| Part | Container | Units |
|--------|---------------|----------|
| Number | r Size | Per Case |
| 06002 | 11 oz aerosol | 12 |



MARINE ENGINE STOR®

Fogging Oil

Protects electrical connections, outboard motors and marine engines to ensure longer life. Keeps engine components corrosion-free during seasonal storage. Preserves reels, tools, and metal surfaces subject to rust.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------|-------------------|
| 06068 | 16 oz aerosol | 12 |
| 06069 | 1 gallon bottle | 4 |
| 06072* | 16 oz aerosol w/hose | 12 |



MARINE HEAVY DUTY SILICONE LUBRICANT

Clean, odorless, highly water resistant; fights corrosion. Lubricates and protects wood, nylon, metal, canvas and leather. Eliminates squeaking and binding. Wide temperature range (-40°F to 400°F).

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| 06077* | 16 oz aerosol | 12 |





FUEL ADDITIVES

MARINE FUEL TREATMENT AND STABILIZER

Reduces octane requirement, combustion deposits, hydrocarbon emissions, knock and ping, valve seat wear. Improves fuel economy and stabilizes fuel up to 8 months. Reduces diesel smoke up to 40%.

| Part | Container | Units |
|--------|-------------|----------|
| Number | Size | Per Case |
| MK4908 | 8 oz hottle | 12 |



MARINE STOR & GO®

Ethanol Fuel Treatment & Stabilizer

Prevents phase separation and protects against corrosion. For all Gas-Powered 2 and 4-cycle engines. Improves fuel economy and stabilizes fuel up to 1 year. Cleans entire fuel system.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| 06141 | 8 oz bottle | 12 |
| 06142 | 16 oz bottle | 12 |
| 06143 | 32 oz bottle | 6 |



 $[\]Omega$ – 360° spray valve can be sprayed in the UP or DOWN position. ∞ – As defined by Consumer Products VOC regulations.

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

MARINE FUEL STABILIZER GASOLINE FORMULA

For all 2 and 4-cycle engines. Protects against corrosion during storage. Prevents gum and resin build-up; keeps filters and injectors clean. Non-staining.

| Container Size | Units Per Case |
|-------------------|---|
| 8 oz bottle | 12 |
| 16 oz bottle | 12 |
| 1 quart bottle | 12 |
| 1 gallon bottle | 4 |
| | Size 8 oz bottle 16 oz bottle 1 quart bottle |



CLEANERS

ON & OFF

Hull & Bottom Cleaner

Removes waterline stains, algae stains, rust and gas exhaust stains. Use on fiberglass only. Easy to use – brush it on, rinse it off.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| MK2032 | 1 quart bottle | 12 |
| MK20128 | 1 gallon bottle | 4 |
| MK20550 | 55 gallon drum | 1 |



MARINE OCTANE BOOST

Increases octane rating of gasoline. Reduces or eliminates engine knock and ping. Improves starting. One bottle treats up to 20 gallons of fuel.

| Part | Container | Units |
|--------|--------------|----------|
| Number | Size | Per Case |
| 06067 | 12 oz bottle | 12 |



ON & OFF GEL

Hull & Bottom Cleaner

Unique viscous formula that clings to the surface to break down grease, oil and scum lines and stains. Blue color for easy visualization. Easy to use – brush it on and rinse it off.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| MK3532 | 1 quart bottle | 12 |
| MK35128 | 1 gallon bottle | 4 |



BIG BULLY®

Natural Orange Bilge Cleaner

Works fast to emulsify oil, grease and scum. Leaves bilge areas clean and fresh. Self-cleaning formula is activated by the rolling action of the boat.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| MK2332 | 1 quart bottle | 12 |
| MK23128 | 1 gallon bottle | 4 |



ALUMINEX™

Pontoon & Aluminum Hull Cleaner

Specially formulated for cleaning hulls & bottoms of aluminum & pontoon boats. Quickly removes waterline stains, lime deposits, algae stains and oxidation.

| Part | Container | Units |
|---------|-----------------|----------|
| Number | Size | Per Case |
| MK3132 | 1 quart bottle | 12 |
| MK31128 | 1 gallon bottle | 4 |







ALUMINEX™ CLEAN & SHINE

Aluminum Cleaner & Brightener

Dual-action formula specially designed to instantly clean and brighten aluminum hulls with Safe Acid Technology™. Best results on surfaces with light to medium oxidation. Safe on anodized and painted aluminum.

| Part | Container | Units |
|--------|----------------|----------|
| Number | Size | Per Case |
| MK3332 | 1 quart bottle | 12 |



MILDEW STAIN REMOVER

Quickly removes even the toughest mildew and mold stains. Fine mist spray won't run, even on vertical surfaces. No scrubbing necessary. Just spray on, wipe off. Use on any vinyl or hard surface. Safe on boat covers and marine fabrics.

| Part | Container | Units |
|--------|----------------------|----------|
| Number | Size | Per Case |
| MK3732 | 1 quart spray bottle | 12 |



CLEANING DETAIL®

Non-Skid Deck Cleaner

Cleans and brightens fiberglass, stainless steel, chrome, brass and aluminum. Use on most surfaces above the waterline. Great for non-skid decks, shower stalls and tubs.

| Part | Container | Units |
|--------|-------------------------|----------|
| Number | Size | Per Case |
| MK2132 | 1 quart flip-top bottle | 12 |



SUPER SUDS™

Boat Soap

Highly concentrated synthetic detergent. Non-streaking. Leaves no residue. Cleans away dirt and grime, leaving surfaces sparkling clean. Will not strip wax. Biodegradable formula.

| Part Number | Container Size | Units Per Case |
|----------------|-------------------|-------------------|
| MK2232 | 1 quart bottle | 12 |
| MK22128 | 1 gallon bottle | 4 |



SPRAY AWAY™

All Purpose Cleaner

Cleans grease, grime, oil, rain stains, fish blood and more. Great on virtually any surface. Non-flammable.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------|-------------------|
| MK2832 | 1 quart spray bottle | 12 |
| MK28128 | 1 gallon bottle | 4 |



INFLATABLE BOAT CLEANER

Effectively cleans PVC, vinyl, Hypalon, EVA, Nylon, plastic, Neoprene and Polyurethane materials. Helps prevent corrosion of metal hardware. Won't fade covers. Great for cleaning skis and wakeboards.

| Part | Container | Units |
|--------|----------------------|----------|
| Number | Size | Per Case |
| MK3832 | 1 quart spray bottle | 12 |





VINYL CARE

ULTRA VINYL CLEANER

Removes deeply embedded dirt, grease, grime and oil. Easy to use. Concentrated foam cleaner works fast. Excellent for all interior and exterior vinyl.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| MK2718 | 20 oz aerosol | 12 |



GREASE AWAY Engine Degreaser

Heavy duty engine degreaser. Formulated for outboards, inboards, stern drives, machinery and more. Spray on/rinse off. Contains no petroleum solvents.

| Part Number | Container Size | Units Per Case |
|----------------|----------------------|-------------------|
| MK5232 | 1 quart spray bottle | 12 |
| MK52128 | 1 gallon bottle | 4 |

CLEAR VINYL Cleaner & Polish

Cleans, polishes and protects all transparent clear vinyl in one easy step. Great for isinglass, clear vinyl enclosures, plastic windshields, hatches and instruments made of Plexiglas®, acrylic, and polycarbonates. Easy spray-on-buff-off formula.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| MK6414 | 16 oz aerosol | 12 |



GLASS PLEX™ Glass Cleaner

Non-streaking formula. Contains no ammonia or alcohol. Use on glass, Plexiglas®, plastics, acrylics, isinglass, fiberglass, computer screens, counters, appliances, stainless steel and chrome.

| Part | Container | Units |
|--------|----------------------|----------|
| Number | Size | Per Case |
| MK3918 | 1 quart spray bottle | 12 |

TEAKWOOD CARE

NU-TEAK[™] One Step Teak Cleaner

Cleans teak and other hardwoods. Removes stains and weathering. Contains no acids. Will not raise wood grain. Also great for decks, patios and outdoor furniture.

| Part | Container | Units |
|--------|----------------|----------|
| Number | Size | Per Case |
| MK2432 | 1 quart bottle | 12 |



BLACK STREAK REMOVER

Instantly removes black streaks caused by water run off on fiberglass and metal surfaces. Test on plastic surfaces.

| Part | Container | Units |
|--------|----------------------|----------|
| Number | Size | Per Case |
| MK6732 | 1 quart spray hottle | 12 |



CRYSTAL LAKES™ Hull & Bottom Cleaner

Cleans and brightens the hull and bottom while removing brown water stains, mold stains, algae stains, rust stains and more.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| MK7320 | 20 oz tub | 12 |





Plexiglas® is a registered trademark of Arkena France Corporation

WAXES/POLISHES

HIGHLIGHT™

Spray Wax

Instantly gives a high-gloss hand-rubbed look. Protects against sun, salt and weathering. Waxes and polishes fiberglass, stainless steel, chrome and brass.

| Part | Container | Units |
|--------|---------------|----------|
| Number | Size | Per Case |
| MK2618 | 20 oz aerosol | |



TREWAX®

Four Seasons Boat Wax

Contains Carnauba, the world's hardest natural wax. Leaves a hard, brilliant finish with long lasting durability. Designed specially for marine finishes; use on fiberglass, painted surfaces, aluminum, chrome, stainless steel. Protects against the adverse effects of sun, salt, rain, etc.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| MK66 | 12 oz tub | 12 |



HEADS UP™

Liquid Holding Tank Deodorant

Works instantly to control odors. Long-lasting pleasant fragrance. Helps keep holding tanks and recirculating or portable toilets clean and breaks down waste and tissue. Non-formaldehyde formula.

| Part | Container | Units |
|--------|----------------|----------|
| Number | Size | Per Case |
| MK4532 | 1 quart bottle | 12 |



LIQUID ROLLERS® **Trailer Bunk Boards Lubricant**

Makes the loading and unloading of boats easy. Dramatically reduces friction to make bunk boards as slick as rollers. Long lasting, nongreasy, non-staining formula. Repels road dirt and grime.

| Part | Container | Units |
|---------|---------------|----------|
| Number | Size | Per Case |
| MK6810* | 16 oz aerosol | 12 |



MOISTURE ABSORBER

Dries air in cabins, lockers, bathrooms, closets, basements and other enclosed areas. Super dry concentrated pellet formula absorbs up to 50% more moisture than flake formulas. Package includes protective web lid.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| MK6912 | 12 oz tub | 12 |



FABRIC WATERPROOFER

Premium grade heavy duty water repellent solution. Restores water repellency of cotton and synthetic fabrics. Contains no color or dyes. Use on boat covers, bimini tops, convertible tops, awnings, tents, clothing, footwear and more. Safe on Sunbrella® and other marine grade fabrics.

| Part Number | Container Size | Units Per Case | |
|----------------|----------------------|-------------------|--|
| MK6332 | 1 quart spray bottle | 12 | |
| MK63128 | 1 gallon bottle | 4 | |



MOISTURE CONTROL BAG

Absorbs dampness that leads to rust and musty odors. Soaks up moisture from the air like a sponge. Does not drip. Great for lockers, head, galley, bilge, cabin and rope storage. Also great for RV, home and apartment use. Reusable.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| MK7112 | 12 oz bag | 12 |



POLY TANK SPRAYER

A poly tank sprayer designed for professional use. Easy to use. Holds one gallon. High density polyethylene. Equipped with a 36" reinforced multi-layer PVC braided hose and adjustable nozzle. Replacement parts available.

| Part | Container | Units |
|--------|-----------|----------|
| Number | Size | Per Case |
| MK1991 | 1 gallon | 1 |



Sunbrella® is a registered trademark of Glen Raven, Inc.

67

^{*}This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized




SmartWasher® BIOREMEDIATING parts washing system

Get Clean and Be Green

SmartWasher®: a green alternative to a conventional petroleum-based parts washing system. Through the process of bioremediation, the SmartWasher® constantly maintains the cleanliness of the OzzyJuice® cleaning/degreasing solution without the need for hauling, skimming or evacuating the unit.

What is OzzyJuice®?

OzzyJuice® is a powerful, aqueous based degreasing solution that is pH-neutral, non-irritating, non-flammable, and non-toxic. Armed with superior cleaning capability, the OzzyJuice® solutions will match or surpass the performance of premium solvents without all the associated risks. All OzzyJuice® solutions are NSF A1 Registered and certified "Clean" Air Products" by SCAQMD (South Coast Air Quality Management District.)

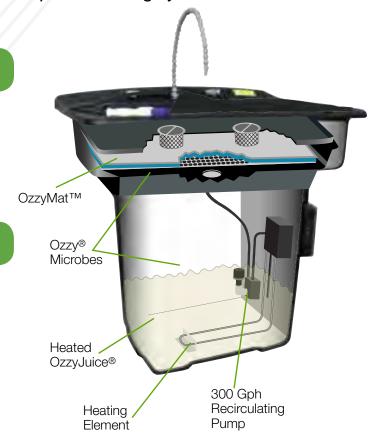



SmartWasher® is a registered trademark of ChemFree Corporation Chemfree Corporation is a subsidiary of CRC Industries.

BIOREMEDIATING PARTS WASHER SYSTEM

Ozzys Keep Solution Clean & Strong

Ozzy® Microbes, introduced into the SmartWasher® system through the OzzyMat™, eat the grease, oil and other contaminants, cleaning off the dirty parts, creating the harmless by-products of carbon dioxide and water. The OzzyJuice® is heated to encourage Ozzy® microbe growth.

Clean OzzyJuice® Means Clean Parts

The OzzyJuice® cleaning/degreasing solution cleans the dirty parts and the Ozzy® microbes clean the OzzyJuice® leaving it strong and clean for every use. You should never need to haul away dirty parts cleaning fluid again, if the unit is maintained properly, and according to the operating instructions.

| OzzyMat™ | |
|---|--------------|
| FL-4 Multi-Layer Filter (recommended for normal to heavy parts cleaning applicatio 6-Pack | 14124 ns) |
| FL-3 Single Layer Filter (recommended for light parts cleaning applications) 6-Pack | 14149 |



| SmartWasher® Covers | | | |
|---------------------|---|----|--|
| 14889 | Cover for SmartWasher® SW23 Mobile Parts Washer – Fits 14161 | | |
| 14890 | Cover for SmartWasher® SW25 & SW25C Signature Parts Washer – Fits 14145 & 14711 | | |
| 14891 | Cover for SmartWasher® SW28 SuperSink Parts Washer – Fits 14144 | == | |
| 14892 | Cover for SmartWasher® SW28XE SuperSink Parts Washer – Fits 14710 | | |
| 14893 | Cover for SmartWasher® SW37 Mobile Heavyweight Parts Washer – Fits 14162 | | |

SMARTWASHER® START-UP KITS



| SmartWasher® Start-Up Kits | | |
|--|---|-------|
| SW-423 Mobile Parts Washer Kit | 1 SW-23 Unit + 3 Pails SW-4 OzzyJuice® Fluid + 1 FL-4 OzzyMat™ Filter | 14740 |
| SW-437 Mobile Heavyweight Parts Washer Kit | 1 SW-37 Unit + 5 Pails SW-4 OzzyJuice® Fluid + 1 FL-4 OzzyMat™ Filter | 14741 |
| SW-737 Mobile Heavyweight Parts Washer Kit | 1 SW-37 Unit + 5 Pails SW-7 OzzyJuice® Fluid + 1 FL-4 OzzyMat™ Filter | 14742 |
| SW-723 Mobile Heavyweight Parts Washer Kit | 1 SW-23 Unit + 3 Pails SW-7 OzzyJuice® Fluid + 1 FL-4 OzzyMat™ Filter | 14743 |
| SW-323 Mobile Parts Washer Kit | 1 SW-23 Unit + 3 Pails SW3 OzzyJuice® Fluid + 1 F-L4 OzzyMat™ Filter | 14744 |

BIODEGRADABLE

A substance that is capable of being broken down into harmless products by the action of living things. The rate at which compounds may be chemically broken down by bacteria and/or natural environmental factors.

CLASS I OZONE DEPLETERS

Chlorinated solvents including Carbon Tetrachloride, 1, 1, 1-Trichloroethane and CFCs (Freon). Since 1993, these products have required special labeling and have been banned from manufacture by the EPA.

CLASS II OZONE DEPLETERS

Products that contain HCFCs like HCFC-141b and HCFC-225. The production and importation phase out date is January 1, 2003 and January 1, 2015 respectively.

DIELECTRIC STRENGTH

The minimum electrical gradient that a material can withstand without decomposition usually specified in volts per millimeter of thickness. Also known as the breakdown voltage.

ELONGATION PERCENT

Directly related to Tensile Strength. Elongation is the deformation that results from the application of a tensile force and is calculated as the change in length divided by the original length.

EMULSION

A mixture of water-soluble and water-insoluble groups held together by a surfactant. Emulsions are usually milky white.

EXTREMELY FLAMMABLE

As defined by the Consumer Products Safety Commission, a substance with a flashpoint at or below 20°F as determined by Tagliabue Open Cup Tester. Or, for an aerosol, if the flame travels back to the actuator and the flashpoint is at or below 20°F.

FALEX TEST

A method for determining the extreme pressure (EP) or anti-wear properties of oils and greases. Vee blocks (with large "V-shaped notch) are placed on opposite sides of rotating steel shaft, and the apparatus is immersed in the test lubricant. Load is automatically increased until seizure occurs. Measurable wear scars are formed on the blocks.

FERROUS

Metals related to or containing iron.

VISIT THE CRC STOPLIGHTS WEB PAGE TO LEARN MORE ABOUT OUR FOOD SAFETY PROGRAM & NSF! Stoplight Many 9 GP (CO) TRANST? VISE YOU THE DOOR HOME!

FLAMMABLE

Capable of catching fire easily and burning rapidly. OSHA defines flammable liquids as having a flashpoint below 100°F.

FLASH POINT

The lowest temperature of a liquid or solid at which it gives off vapors that will ignite but not continue to burn when a small flame is periodically passed over the surface.

GALLING

Destructive wear of a metal surface characterized by large chunks of metal being removed.

KB VALUE

The Kauri Butanol (KB) value is a measure of the solvent power of a hydrocarbon liquid. Kauri gum is readily soluble in butanol but insoluble in hydrocarbons. The KB value is the measure of the volume of solvent required to produce turbidity in a standard solution containing kauri gum dissolved in butanol. The higher the KB value, the more powerful the solvent.

NLGI GRADE

National Lubricating Grease Institute. A numerical scale for classifying the consistency of a particular grease. The most common consistency number is #2. Softer grades, especially #0 and #1, are often used for improved pumpability or low-temperature service. High consistency numbers, #3 through #6 are used for certain high-speed bearings where leakage and sealing are particular concerns.

NSF RATING

National Sanitation Foundation Registration
Program for Proprietary Substances and Nonfood
Compounds. This program mirrors the prior USDA
program. Product evaluation is based on formulation
and label review. Approved products receive a Letter
of Authorization and are included on the NSF White
Book List of Proprietary Substances and Nonfood
Compounds.

NON-FERROUS

Metals that contain no iron.

ODCs

Ozone Depleting Compounds. Substances that contribute to the deterioration of the ozone. There are two types of ODCs: Class I and Class II ozone depleters. Class I ODCs are the most harmful to the ozone. Currently listed as Class I ODCs are chlorofluorocarbons (CFCs), carbon tetrachloride, and 1,1,1-Trichloroethane. Class II ODCs are less harmful but still pose a threat. Currently listed as Class II ODCs are HCFCs.

OTC STATES

Ozone Transport Commission. As of August 1, 2012, the following states have adopted the OTC Model Rule regulating VOC's in consumer products: Connecticut, Delaware, District of Columbia, Illinois, Indiana, Maine, Maryland, Massachusetts, Michigan, New Hampshire, New Jersey, New York, Ohio, Pennsylvania, Rhode Island and Virginia.

PH

A scale ranging from 0 to 14 used to measure acidity and alkalinity. The lower the number the more acidic; the higher the number, the more alkaline; 7 is neutral.

PSI

Pound per Square Inch. A unit of pressure equal to the pressure resulting from a force of 1 pound applied uniformly over an area of 1 square inch.

SAE

Society of Automotive Engineers.

SUBSTRATE

The surface being cleaned; the substrate may be metal, plastic, ceramic, etc.

SURFACTANT

A specialized molecule that connects water soluble and water-insoluble groups.

TENSILE STRENGTH

The strength of different metals to support different loads (masses) before going through the point at which they change from being elastic to being plastic. The tensile strength test measures the elastic and plastic properties of metal.

TIMKEN OK LOAD

The highest load than can be applied without abrasive wear to a rotating test cup containing a grease sample. The higher the OK number, the better protection a grease provides under severe service. The highest number typically given to any sample is 80.

VISCOSITY

The resistance to flow or degree of thickening fluid. Flow requires stress; liquids such as additive-free lubricating oils are known as Newtonian fluids in that shear rate is proportional to the pressure or stress applied. This proportion is the coefficient of viscosity.

VOCS

Volatile Organic Compounds. A class of chemicals that contain carbon and have the potential to form ground-level ozone (smog). Many common items including gasoline, oil-based paints and alcohols produce VOCs.



VISIT CRC ON THE WEB TO ACCESS CURRENT VOC INFORMATION!

Need a QR code reader? Visit your app store today!



CATEGORY CODE 3H

This product is acceptable for use as a Release Agent on grills, ovens, loaf pans, boning benches, chopping boards, or other hard surfaces in contact with meat and poultry food products to prevent food from adhering during processing.

CATEGORY CODE A1

This product is acceptable for use as a general cleaning agent on all surfaces, or for use with steam or mechanical cleaning devices in all departments. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. After using this compound, surfaces must be thoroughly rinsed with potable water. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

CATEGORY CODE C1

This product is acceptable for use as a general cleaner/degreaser in inedible product processing areas, and/or exterior areas of official establishments operating under the Federal Meat, Poultry, Shell Egg Grading, and Egg Products Inspection Programs provided that it is not used to mask odors resulting from unsanitary conditions, and that any characteristic odor or fragrance does not penetrate into an edible area. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

CATEGORY CODE C3

The product is acceptable for use in official establishments operating under the Federal Meats and Poultry Products Inspection Program. This compound may be acceptable in areas of food processing facilities where edible products are neither processed nor stored in open containers. This category also covers paint removers and snow and ice melting products intend for use in non-processing areas.

CATEGORY CODE D2

This product is acceptable for use as a sanitizer on all surfaces not always requiring a rinse in and around food processing areas. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. A potable water rinse is not required following the use of this compound on previously cleaned hard surfaces provided that the surfaces are adequately drained before contact with food so that little or no residue remains which can adulterate or have a deleterious effect on edible products. A potable water rinse is required following use of this compound under conditions other than stated above. The compound must always be used according to applicable label directions.

CATEGORY CODE E4

The product is acceptable for use as a hand cream, lotion or cleaner in non-processing areas. The use of such products is limited to toilets, dressing rooms and other non-processing areas. Employees who handle edible products may use such compounds only when leaving the plant.

CATEGORY CODE H1

This product is acceptable as a lubricant with incidental food contact for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used on food processing equipment as a protective anti-rust film, as a release agent on gaskets or seals of tank closures, and as a lubricant for machine parts and equipment in locations in which there is potential exposure of lubricated part to food. The amount used should be the minimum required to accomplish the desired technical effect on the equipment. If used as an anti-rust film, the compound must be removed from the equipment surface by washing or wiping, as required to leave the surface effectively free of any substance, which could be transferred to food being processed. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE H2

This product is acceptable as a lubricant where there is no possibility of food contact in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used as lubricants, release agents, or anti-rust films on equipment and machine parts or in closed systems (ex. Hydraulic systems) in locations where there is no possibility of the lubricant or lubricated part contacting edible products. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE K1

This product is chemically acceptable as a solvent cleaner for use in non-processing areas of official establishments operating under the Federal Meat and Poultry Products Inspection Program. After using the product, equipment and utensils must be thoroughly washed with an acceptable detergent solution and rinsed with potable water to remove all traces of the cleaner before being returned to the processing area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE K2

This product is chemically acceptable as a solvent for cleaning electronic instruments and devices which will not tolerate aqueous cleaning solutions in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging material are re-exposed in the area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE K3

This product is acceptable for use as an adhesive or glue remover, for removing adhesive or glue from food packaging materials in and around food processing areas, where its use is not intended for direct food contact. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. After using these compounds, all surfaces must be thoroughly washed with an acceptable detergent solution, and rinsed with potable water. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging materials are re-exposed in the area.

CATEGORY CODE P1

This product is chemically acceptable for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. This compound must be used in a manner which prevents direct or indirect contamination of edible products or potable water. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE M1

This product is acceptable for use as a mold release agent on molds that are used to produce packaging materials that will contact food to prevent the finished product from adhering to the mold. The amount used on the equipment should be the minimum required to accomplish the effect.

CATEGORY CODE R2

This product is acceptable for use as a coating where there is no possibility of food contact such as floors, walls, and ceilings. The coating must be applied in a manner which prevents direct or indirect contamination of edible products. Before the food product may be placed in the area where the material is being used, the area should be sufficiently free of odor to prevent product contamination. As a safety precaution, smooth coatings should not be applied to walking or standing surfaces in processing area.

| 0 - 9 | Chute Lube® Silicone Lubricant 24, 27 | F | Н |
|--|---|---|---|
| 1 TANK POWER RENEW® Diesel 61 | Citrus Degreaser9, 12, 34, 35 | Fabric Waterproofer | Hand Cleaner, Cherry |
| 1 TANK POWER RENEW® Gasoline 60 | Clean-R-Carb ™ Carburetor Cleaner59 | Fast Dry Degreaser | Hand Cleaner, Grape |
| 2-26® Multi-Purpose Precision | Cleaning Detail® | Fire Ant Killer | Hand Cleaner, Lanolin Pumice53 |
| Lubricant | Non-Skid Deck Cleaner65 | Fire Block Foam | Hand Cleaner, Mechanix Orange $^{\text{TM}}$ 53 |
| 3-36® Multi-Purpose Lubricant 16, 17 | Clear Vinyl Cleaner & Polish66 | Fluid Oil Pump | Hand Cleaner Towels |
| | CO® Contact Cleaner | Foam Minimal Expansion41, 42 | Hand Cleaner, Wall Mount |
| A | Coil Cleaner | Foaming Coil Cleaner | Heads Up ™ |
| | Cold Flow™ Anti-Gel w/Lubricity 62 | Food Grade Air Tool Oil 19, 20, 23, 43 | Liquid Holding Tank Deodorant 67 |
| Aerosol Leak Detector | Compressor Oil SAE 30 | Food Grade Anti-Seize26, 27 | Heavy Duty Clear |
| Air Tool Oil | Constant Velocity (C.V.) Joint Grease | Food Grade Belt Dressing 18, 19 | Penetrating Grease |
| Aluminex [™] Pontoon & Aluminum Hull Cleaner | Contact Cleaner | Food Grade | Heavy Duty Degreaser |
| Aluminex™ Clean & Shine | ' | Chain Lube 18, 19, 21, 22, 23 | Heavy Duty Degreaser II |
| Anti-Seize & Lubricating Compound, | Contact Cleaner & Protectant | Food Grade Synthetic | Heavy Duty Drum Brake Wheel Bearing Grease |
| Copper | (Electrical) | Compressor Oil | Heavy Duty Lever Grease Gun |
| Anti-Seize & Lubricating Compound, | Contact Cleaner 2000® | Food Grade Dielectric Grease | HFTM Contact Cleaner |
| Food Grade | (Industrial) | Food Grade Compressor Flush | (Electrical) |
| Anti-Seize & Lubricating Compound, | Contact Cleaner 2000® VC | Food Grade Gear Oils | HF™ Contact Cleaner |
| Nickel | Crystal Lakes™ | Food Grade Hydraulic Oils | (Industrial) |
| Anti-Seize & Lubricating Compound, Nuclear Grade | Hull & Bottom Cleaner | Food Grade Grease Synthetic 47, 48 | Highlight ™ Spray Wax 67 |
| Aviation C.I.C Remover | Cutting Oil | Food Grade Synthetic PAG Chain Oils | Hi-Temp Disc Brake |
| Aviation Degreaser | | Food Grade Machine Oil | Wheel Bearing Grease |
| Aviation Next Generation Degreaser | D | | Honing & Cutting Oil |
| Aviation Quick Dry Precision Cleaner 57 | De-Squeak™ Brake Treatment | Food Grade Penetrating Oil | Hot Line Tool Cleaner Wipes |
| Aviation T-Force® Degreaser | Dielectric Grease | Food Grade Refrigeration Compressor Oils | Wipes |
| Aviation 3-36® | Diesel Air Brake Anti-Freeze & | Food Grade Silicone | HydroForce® All Purpose |
| Aviation Window Cleaner | Conditioner | Food Grade White Grease 18, 19 | Degreaser |
| Aviation XT-2000™ Precision Cleaner 57 | Diesel Dry™ Diesel Water Remover 61 | Food Zone Silicone Sealant – | HydroForce® Butyl-Free |
| Aviation X1-2000 Flecision cleaner | Diesel Fuel Therapy® Diesel | White | Cleaner |
| | Injector Cleaner Plus 61 | Food Zone Silicone Sealant – | HydroForce® Drain Maintainer 14, 15 |
| В | Diesel Fuel Therapy® Plus w/Anti-Gel61 | Clear40, 42 | HydroForce® Drain Re-Nu™ 14, 15 |
| Ball & Roller Bearing | Direct Food | Food Zone Silicone Sealant – | HydroForce® Foaming Citrus |
| Hi-Temp Grease47, 48 | Contact White Oils | Gray | Áll Purpose Cleaner |
| Bar & Chain Lubricant | Disc Brake Quiet | Food Zone Silicone Sealant – Aluminum | HydroForce® Foaming |
| Battery Cleaner | Driller Red Grease | For Gas Tanks | Degreaser |
| Battery Terminal Protector | Dry Graphite Lube | Isopropanol Formula62 | HydroForce® Germicidal Foam Cleaner |
| Bee Blast® Wasp & Hornet Killer | Dry Moly Lube | FR Clothing Insect Repellent | HydroForce® Glass Cleaner |
| Big Bully® Bilge Cleaner | Dry PTFE Lube | Freeze-OFF® Super Penetrant59 | Professional Strength |
| Bio-Con™ Sludge Sediment Remover61 | Duster [™] Aerosol Dust Removal System 7, 8, 32, 33 | Freeze Spray | HydroForce® Industrial Strength |
| Black Streak Remover | Duster™ Moisture-Free | Fuel Injector & Carburetor Cleaner 60 | Degreaser |
| Brake Caliper Synthetic Grease 46, 48 | Dust & Lint Remover | | HydroForce® Stainless Steel |
| Brakleen® Brake Parts Cleaner | | G | Cleaner & Polish |
| Brakleen® Brake Parts Cleaner, 50 State Formula58 | E | Gasket Remover | HydroForce [®] Super Citrus [™] Heavy Duty Degreaser |
| 30 State Formula | | , | HydroForce® Zero VOC General |
| C | Electrical Silicone Lubricant | GL-4 Multi-Purpose Gear Oil SAE 85W90 | Purpose Cleaner |
| Cable Clean® Degreaser | Electronic Component Cleaner | GL-4 Multi-Purpose Gear Oil SAE 14043, 44 | |
| Cable Clean® HF™ | (Electrical) | GL-5* PLUS New Generation™ HD | 1/ / / / / / |
| Cable Clean® High Voltage | Electronic Component Cleaner | Limited Slip Gear Oil SAE 75W90 44 | Ice-Off® Windshield Spray De-Icer 62 |
| Splice Cleaner | (Industrial) | GL-5* PLUS New Generation™ | Industrial Adhesive Remover |
| Cable Clean® NT™ High Voltage | Empty Trigger Bottle | Limited Slip Gear Oil SAE 80W90 44 | Industrial Silicone |
| Splice Cleaner | Engine Degreaser, Citrus Formula 58 | GL-5* PLUS New Generation™ | Inflatable Boat Cleaner |
| Cable Clean® RD™36 | Engine Degreaser, Gel Formula 59 Extreme Duty Silicone | HD Limited Slip Gear Oil SAE | Inner Slide Lube |
| Carb & Choke Cleaner11, 12 | · · · · · · · · · · · · · · · · · · · | 85W140 | Insect Repellent |
| CE™ Precision Cleaner 6, 8, 32, 33 | Extreme Duty Open Gear & Chain Lube24, 27 | Glass-Plex TM Glass Cleaner | Insta-Solv® Degreaser |
| Chain & Wire Rope Lubricant 24, 27 | Extreme Duty Food Grade Grease 47, 48 | Grafitti Remover | Isopropyl Alcohol Precision Cleaner 7, 8 |
| Chlor-Free® Degreaser | Extreme Pressure Engine | Grease Away Engine Degreaser | |
| | | Grease GUILFIEX HOSE 54 | |

CRC PRODUCT NAME INDEX

| J | N | Q | Syn-Go® (OEM Grade) Synthetic |
|---|---|--|---|
| Jump Start® Starting Fluid /Lubricity 62 | Natural Degreaser™ Citrus Based Degreaser9, 12, 34, 35 | QD® Contact Cleaner (Electrical) 31, 33 QD® Contact Cleaner (Industrial) 6, 8 | Gear Oil SAE 75W140 |
| K | New Generation™ | Quick Clean™ Safety Solvent 9, 12 | with PTFE |
| Knock'er Loose® Penetrating Solvent 16 | Wheel Bearing Grease | Quick Flow [™] Emergency | Synthetic rood drade drease47, 40 |
| Knock'er Loose® Plus | Brake Parts Cleaner | Diesel-Gel Relief | т |
| | Non-Chlorinated Brakleen® Brake Parts Cleaner, | R | T-Force® Degreaser 4, 9, 12 |
| L | SCAQMD #1171 Compliant | Red Grease | Tac 2® |
| Layout Fluid, Blue | NT™ Precision Cleaner (Electrical)31, 33 | Roll-Up Door Lubricant | Technical Grade 3-36® |
| Layout Fluid Remover | | RTV Silicone Sealant – Black | Thread Lubricant |
| Lectra Clean® Heavy Duty Electrical Parts Degreaser 5, 34, 35 | NT™ Precision Cleaner (Industrial) | RTV Silicone Sealant – Blue | Throttle Body Air Intake Cleaner 59 |
| Lectra Clean® II Non-Chlorinated | Nu-Teak™ One Step Teak Cleaner 66 | RTV Silicone Sealant – Clear | Trans-Kleen™ Automatic Transmission Treatment |
| Heavy Duty Degreaser5, 34, 35 | | RTV Silicone Sealant – Red | Trewax® Four Season Boat Wax67 |
| Lectra Force™ | 0 | RTV Silicone Sealant – White 40, 42 | TrueTap® Aqua Cutting Fluid 38, 39 |
| Lectra Lube™ | Octane Boost Lead Substitute 60 | Rubberized Spray Undercoating | TrueTap® Foamy Cutting Fluid 38, 39 |
| Lectra Shield ™ Long Term Corrosion Inhibitor | Oilfield Dry Moly Lube | Rust Converter | TrueTap® HD Cutting Fluid38, 39 |
| Liquid Rollers® Trailer Bunk Boards | On & Off Hull & Bottom Cleaner 64 | Rust Remover | TrueTap® Wax Stick Lubricant 38, 39 |
| Lubricant | On & Off Gel64 | | |
| Lithium General Purpose Grease 45, 48 | Ozzy Booster TM | S | U |
| Lock Lube and De-Icer | OzzyJuice® SW-8 Aircraft & Weapons | Salt Terminator® | Ultra-Lite 3-36® |
| | Degreasing Solution | Screwloose® Super Penetrant | Ultra Vinyl Cleaner |
| M/////// | OzzyJuice® SW-1 Degreasing Solution69 | Seal Coat® Urethane Coating29, 30 | Universal 2-Cycle Oil |
| Marine Engine Stor® Fogging Fluid 63 | OzzyJuice® SW-4 Heavy Duty | Silaramic® Brake System Grease | |
| Marine Fuel Stabilizer Gasoline | Degreasing Solution | Siliconized Acrylic Latex Caulk 40, 42 | V |
| Formula | OzzyJuice® SW-7 Parts/Brake | SmartWasher® Mobile Heavyweight | Valve-Kleen™ Engine Valve & |
| Marine Fuel Treatment & Stabilizer 63 | Cleaning Solution | Parts Washer | Lifter Cleaner |
| Marine Grease for Boat Trailer Wheel Bearings | OzzyJuice® SW-6 Select Metals Degreasing Solution69 | SmartWasher® Mobile Parts/ Brake Washer | Visiclear® Display & Electronic Screen Cleaner |
| Marine Heavy Duty Silicone Lubricant 63 | OzzyJuice® SW-3 Truck Grade | SmartWasher® Signature Parts | |
| Marine Octane Boost | Degreasing Solution | Washer | w |
| Marine 6-56® Zero VOC | OzzyMat® Single-Layer | SmartWasher® Start-Up Kits | Wasp & Hornet Killer Plus™ |
| Marine 6-56® Multi-Purpose Lubricant | Ozzywat [©] wuiu-Layei | SmartWasher® SuperSink Parts Washer | Insecticide51 |
| Marine Stor & Go® | P | SmartWasher® SuperSink XE | Water Based Silicone |
| Mass Air Flow Sensor Cleaner | Paints – All Purpose Enamel | Parts Washer68 | Weld Check® Cleaner & Penetrant Remover |
| Mech Force™ Industrial | Spray Paint & Primer | Smoke Test® Smoke Detector Tester | Weld Check® Developer |
| Degreaser | Paints – Anti-Slip | Soluble Oil | Weld Check® Penetrant |
| Mildew Stain Remover | Paints – Reflective Spray | SP-250™ Corrosion Inhibitor 28, 30 | Welder's Anti-Spatter Spray |
| Minute Mend™ Epoxy Putty | Paints – Rust Proof Enamel | SP-300 TM Corrosion Inhibitor 28, 30 | White Lithium Grease |
| Moisture Absorber | Spray Paint & Primer | SP-350™ Corrosion Inhibitor 28, 30 | |
| Moisture Control Bag | Pan Divider Oil Direct | SP-400™ Corrosion Inhibitor 28, 30 | X,Y |
| Mold Cleaner, Heavy Duty | Food Contact | Spray Adhesive | XT-2000™ Precision Cleaner |
| Mold Release, Food Grade | Parcel Glide® Silicone | Spray Away™ All Purpose Cleaner 65 | (Electrical) |
| Silicone49, 50 | Lubricant | Sta-Plex [™] Premium Red Grease | XT-2000™ Precision Cleaner |
| Mold Release, Food Grade WO 49, 50 | Perma-Mend [™] | Extreme Pressure | (Industrial)6, 8 |
| Mold Release, General Purpose | Permatherm™ Synthetic Grease | Steel Re-Nu [®] | |
| Silicone | PF Precision Cleaner | Stor & Lube® Corrosion Inhibitor | Z |
| Mold Release, Heavy Duty Silicone 49, 50 | (Electrical) | Stor-X® Fuel Stabilizer60 | Zinc-It® Bright Instant Cold |
| Mold Release, Lecithin | PF Precision Cleaner | Super Degreaser TM 4, 9, 12 | Galvanize |
| Moly-Graph® Extreme Pressure | (Industrial) | Super Degreaser Plus | Zinc-It® Instant Cold Galvanize 29, 30 |
| Multi-Purpose Grease | Pipe Thread Sealant | Super Suds™ Boat Soap | |
| Multi-Purpose Food Grade Grease 47, 48 | Poly Tank Sprayer | Super Soy [™] Degreaser | |
| maia i dipodo i oda diado diodoc47, 40 | Power Lube® High Performance Lubricant | Super White™ Multi-Purpose Grease | |
| | Promium Fuel Injector Clospor 60 | Sure Shot® Reusable Sprayer | |

CRC Offers
Chemical
Management
Solutions Through
Our Programs.

RISK REDUCTION PARTNERSHIP PLAN™

STOPLIGHT® FOOD SAFETY PROGRAM

• ENVIRONMENTALLY PREFERRED PRODUCTS

SAFETY SHORTS – TRAINING

RISK REDUCTION PARTNERSHIP PLAN™

CRC's commitment to providing our customers with value-added services has prompted the creation of the Risk Reduction Partnership Plan™. Much more than just a chemical use guide, this plan is a presentation piece that highlights CRC's value-added services. CRC, together with distribution, works with our key end-users to improve the overall management of their MRO chemicals and provide them with documented cost savings.

STOPLIGHT® FOOD SAFETY PROGRAM

Developed in response to a growing need within the industry to minimize the risk of food contamination from maintenance chemicals across all food processing areas, the StopLight[®] Program helps to insure proper product usage, minimum risk and cost, and helps you meet the FSMA (Food Safety Modernization Act).

ENVIRONMENTALLY PREFERRED PRODUCTS

To address the growing need for sustainable and environmentally friendly products, CRC offers alternative chemistries in key MRO categories. These products have been specially formulated to provide a cleaner and safer work environment while maintaining performance. Leading this category is the SmartWasher® Bioremediating Parts Washer and the HydroForce® Water Based Cleaners.

SAFETY SHORTS – TRAINING

CRC will conduct Safety Shorts Training for groups of any size in your facility. Our training presentations cover a variety of topics including Chemical Handling, Fire Safety, General Aerosol & Chemical Safety, Hazardous Waste, Personal Protective Equipment, Safety Data Sheets and Ventilation. Each presentation is 20-30 minutes in length and attendees receive a certificate upon completion. A sign-in sheet records who attended training which is required by many companies to satisfy training objectives.

Minute Mend Citrus Degreaser Mass Air Flow Sensor Cleaner manufacturing • food & beverage • utility & electrical oil & gas • healthcare • mining • railway **Sealants & Adhesives Cooling System Maintenance Salt Terminator Starting Fluid** Syn-Go Customer Care: 800-272-4620 Technical Assistance: 800-521-3168

www.crcindustries.com

10421CG