



Digital Projector

Quick Start Guide

Portable Entertainment Series | GVI

Projecteur numérique


Guide de démarrage rapide

Gamme de divertissement portable | GVI


V2.01

Package contents


GVI Projector

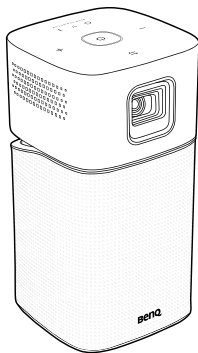

Adapter



Plug Head



USB-C™ Cable



Remote Control
(with one CR2032 battery)




Carry Bag



Quick Start Guide



Regulatory Statements &
Warranty Card




HDMI to USB-C™ Adapter



- Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.
- Some of the accessories may vary from region to region.
- The warranty card is only supplied in some specific regions. Please consult your dealer for detailed information.


Product Overview

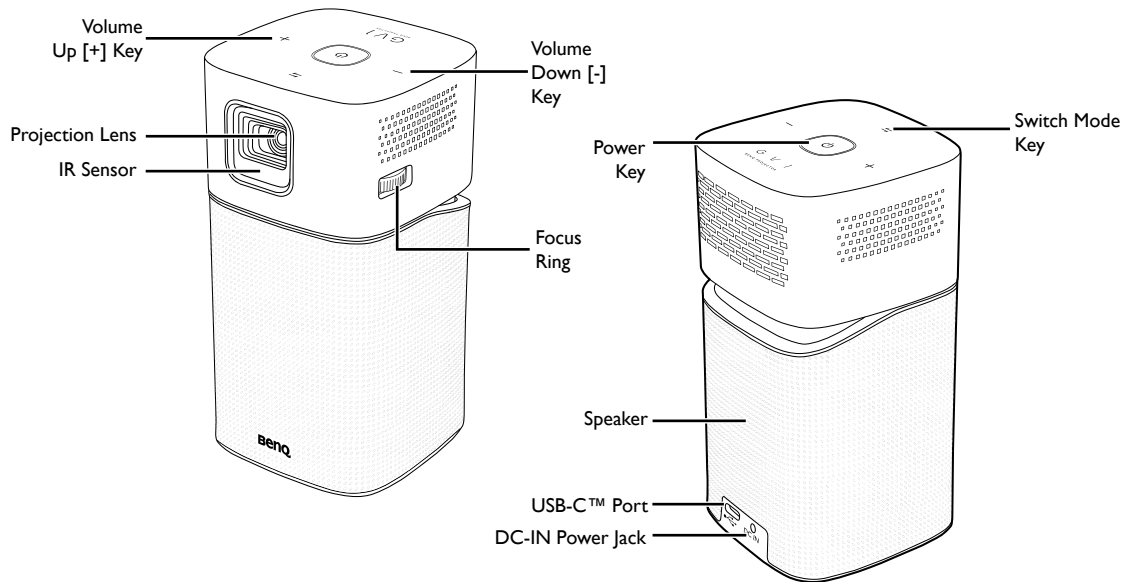


LED Indicators

Scenario	Status	Power Key		Switch Mode Key	
		LED Behavior	Schema	LED Behavior	Schema
Charging with Adapter	Battery <20%	Red - breathing		N/A	
	Battery 20-60%	Yellow - breathing		N/A	
	Battery >60%	Green - breathing		N/A	
	Battery 100%	Green - solid		N/A	
Battery Mode	Battery <20%	Red - flashing		N/A	
	Battery 20-60%	Yellow - solid		N/A	
	Battery > 60%	Green - solid		N/A	
Bluetooth Speaker Mode	Ready to Pair/Pairing	Depends on power status		Blue - flashing	
	Pair successful	Depends on power status		Blue - solid	
System Update	System update in progress	Green - flashing		Blue - flashing	
	System updated has failed	Red - solid		Red - solid	
	System update is successful and system is restarting	Green - solid		Blue - solid	
Error	LED Error	Yellow - solid		Red - flashing	
	Fan Error	Red - solid		Red - flashing	
	Optical Engine Temperature Error	N/A		Red - solid	
	Battery Temperature Error	N/A		Red - flashing	
	Driver Board Error	Red - flashing		Red - flashing	

Attaching the Plug Head


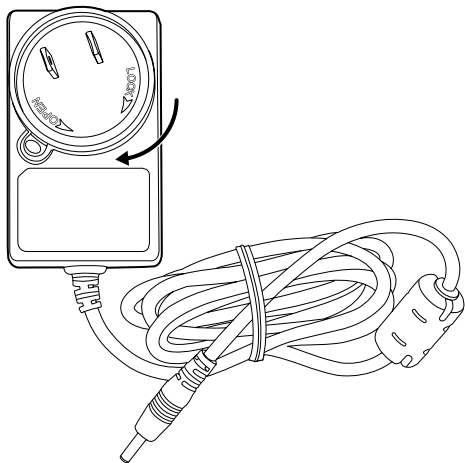


Removing the Plug Head

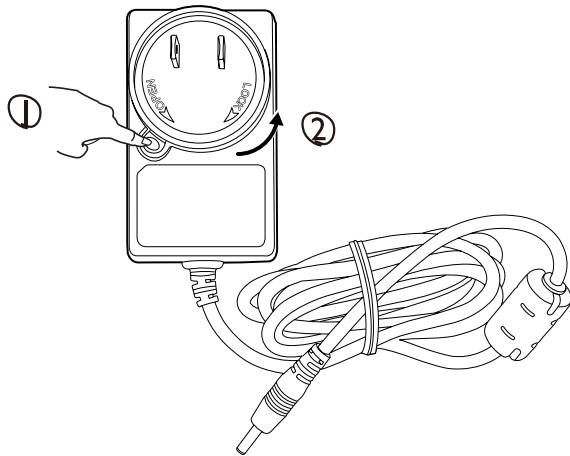


The plug head shown may be different depending on region.

Powering / Charging the Projector

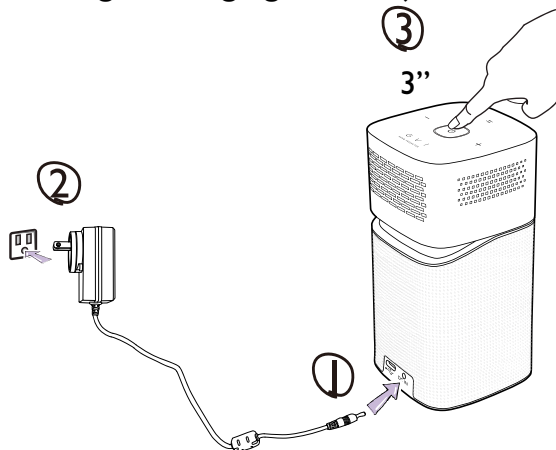


- **Charge the battery fully to ensure a successful OTA update.**
- See "LED Indicators" on page 4 for charging behavior for the Power Key/LED Indicator.
- Once the projector is fully charged the adapter can be disconnected.
- For initial power up, press and hold the Power Key/LED Indicator for 3 seconds. To turn off or on the projector after initial power up, simply short-press the Power Key/LED Indicator.
- For AC/DC adapter, the socket-outlet shall be installed near the equipment and shall be easily accessible.



Adjusting the Projector Angle

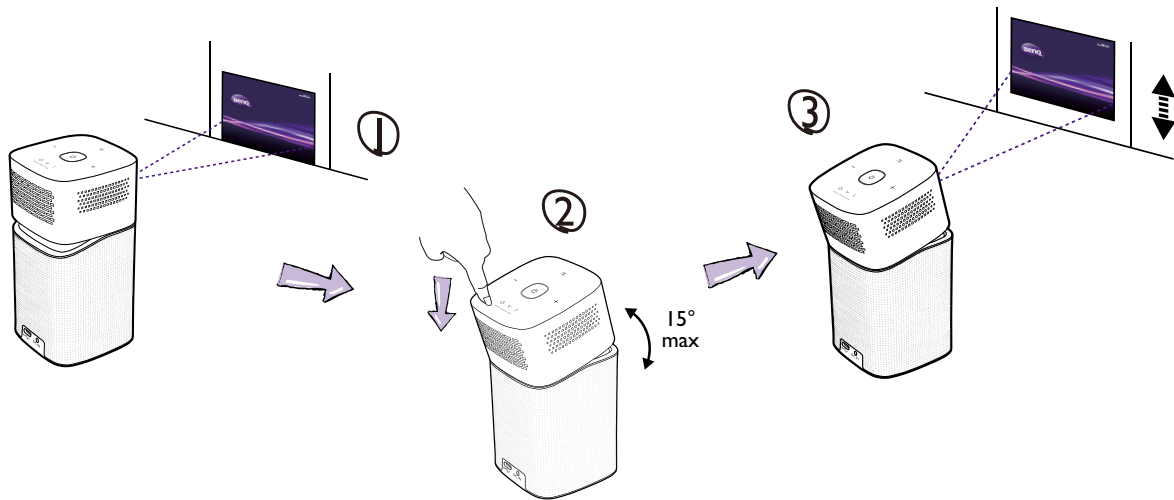


Adjusting the Focus

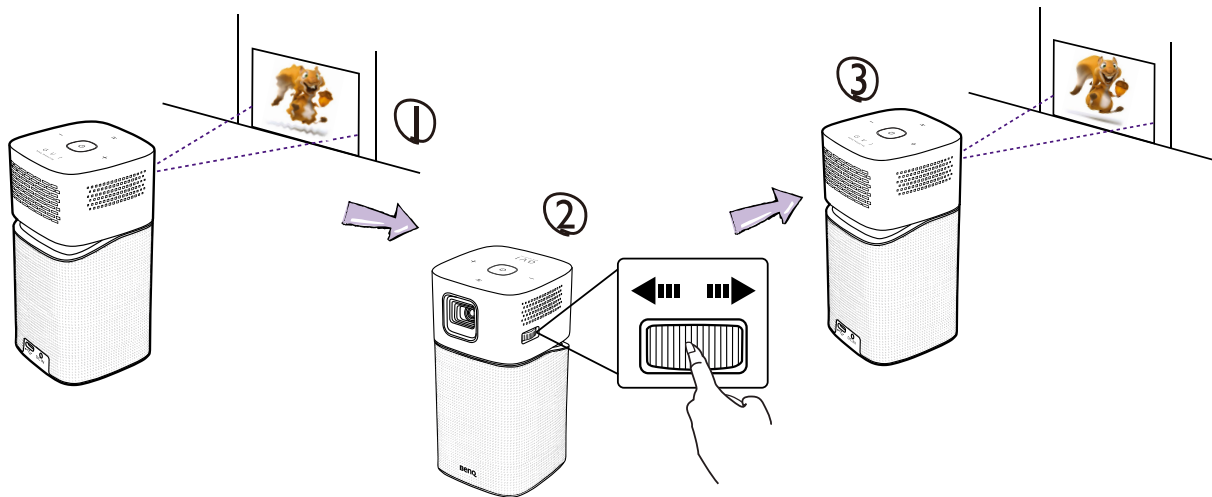

Remote Control

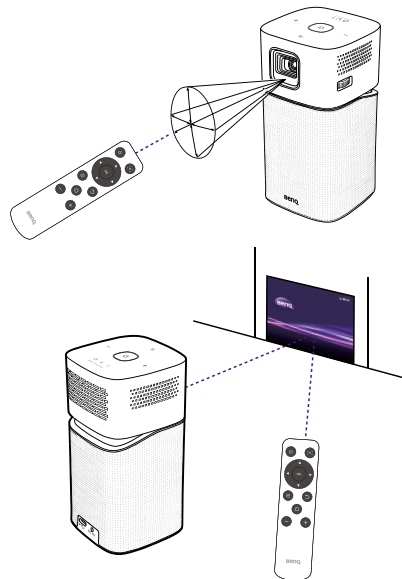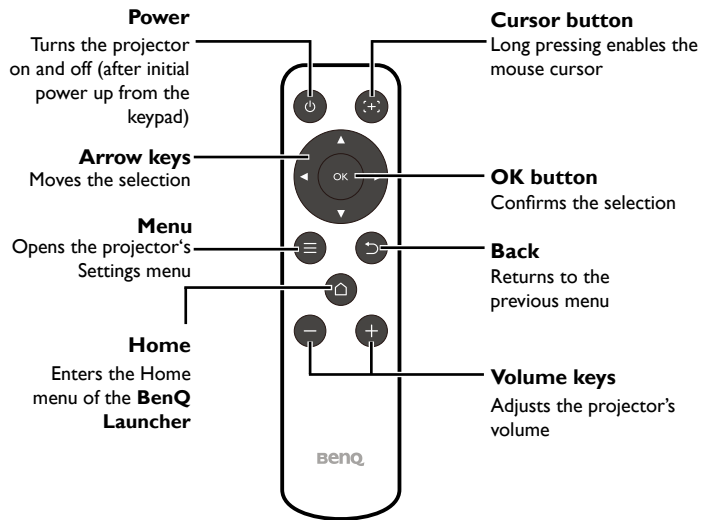


Connecting Devices

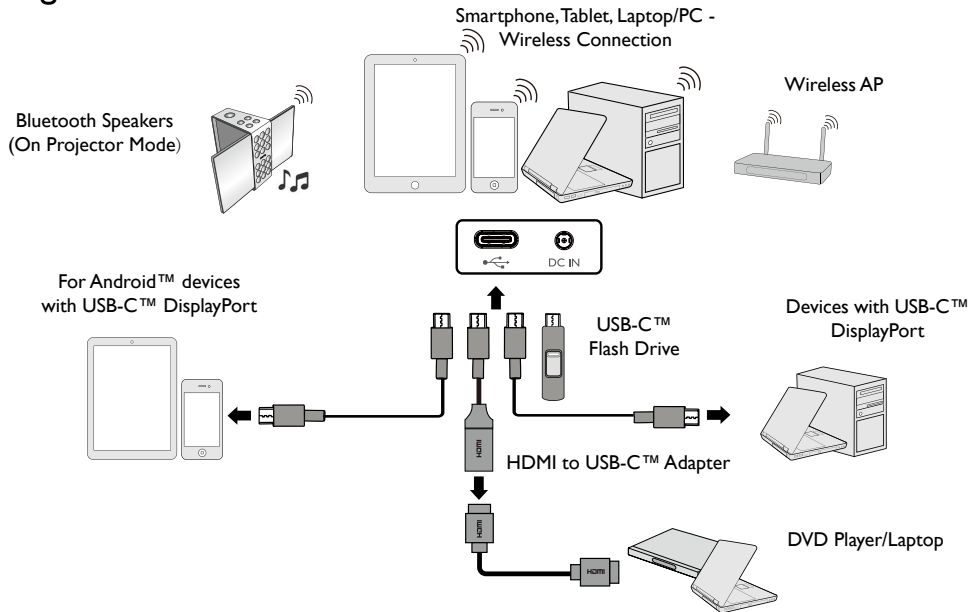


Setup Wizard


①

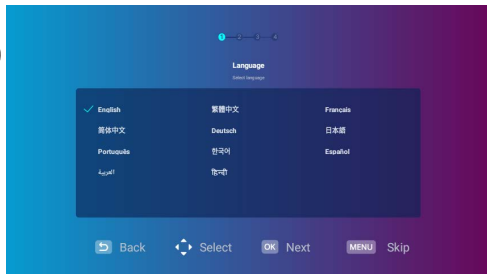


②

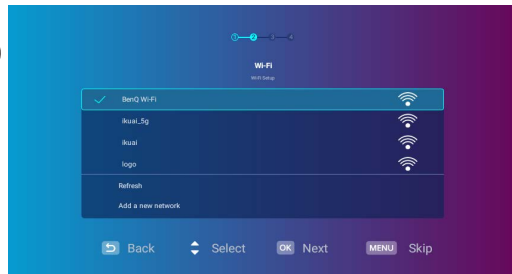

③

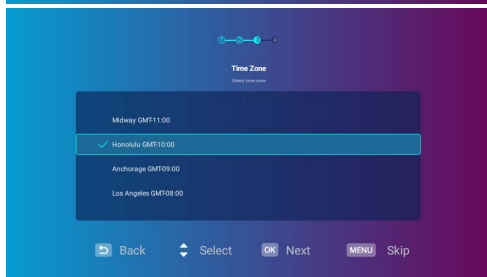

④

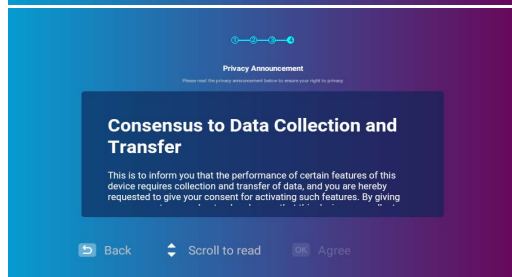

BenQ Launcher Home Page

BenQ Startup Panel

Displays the access to **Wi-Fi Settings** only if the projector is not connected to an available Wi-Fi network

Input Source

Displays the current device connected via USB-C™ (devices with DisplayPort functionality can project via the connection)

Status Bar

Shows time, wireless and battery status



Wireless Projection for iOS and macOS - Projects wirelessly via iOS or Mac OS

Wireless Projection for Android™ - Projects wirelessly via Android™

Wireless Projection for PC - Projects wirelessly via PC



Media Player

Displays the media files from a device connected via USB-C™

- Keep the battery charged to at least 60% (3 bars on the battery status icon) to ensure a successful OTA update.
- The Media Player button only appears when a USB-C™ device is connected to the projector.

BenQ Launcher Settings Menu

Press ▽ to view the app shortcuts or settings menu

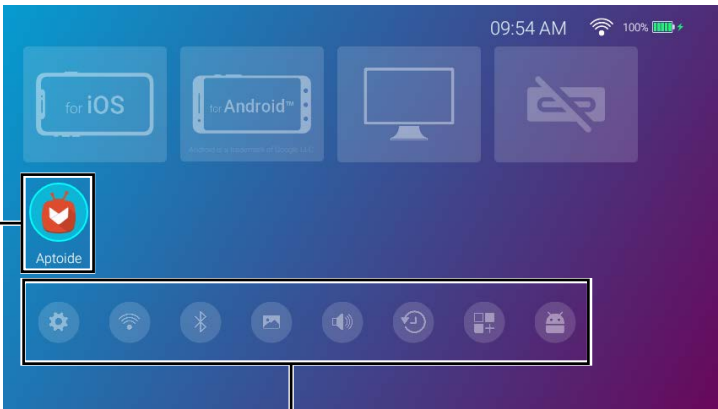

App Shortcuts

Displays the shortcuts to apps installed on this projector

Settings Menu


Displays the buttons to adjust Wi-Fi, Bluetooth and other settings




These screens are for reference only and may vary by the product supplied for your region.

Wireless Internet Connection




① Press **OK** from the BenQ Launcher Home Page to access Wi-Fi settings.

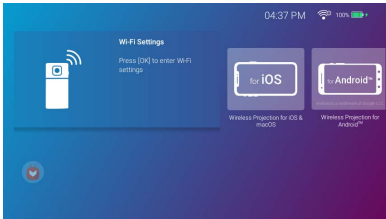

② Make sure the **Wi-Fi** function is enabled. If disabled, press **OK** to turn it on.

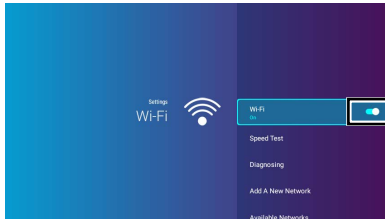


③ Press ∇ to choose the SSID and press **OK**. Enter the password and press **OK** (if required).

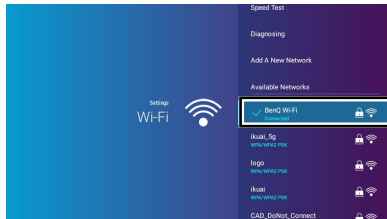

Wireless Projection - iOS Devices

①

Select **Wireless Projection for iOS and macOS** from the BenQ Launcher Home Page and press **OK**.

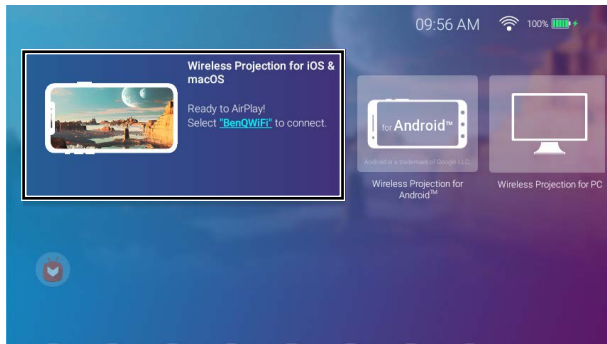

②


Refer to the **Wireless Projection for iOS and macOS** screen for wireless or hotspot connection details. Using your iOS device, connect to the projector via Airplay.



Wireless Projection - Android™ Devices

①

Select **Wireless Projection for Android™** from the BenQ Launcher Home Page and press **OK**.

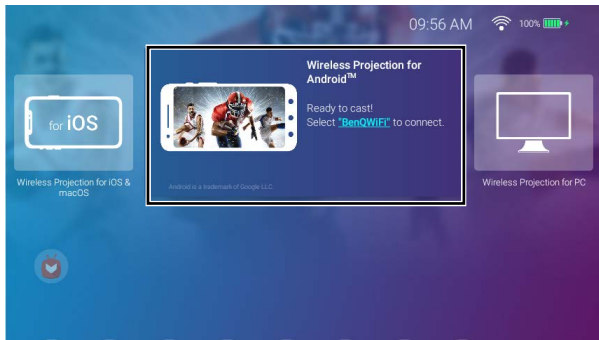

②


Refer to the **Wireless Projection for Android™** screen for wireless or hotspot connection details. Using your Android device, connect to the projector via screencasting.



Wireless Projection - PC


①

Select **Wireless Projection for PC** from the BenQ Launcher Home Page and press **OK**.

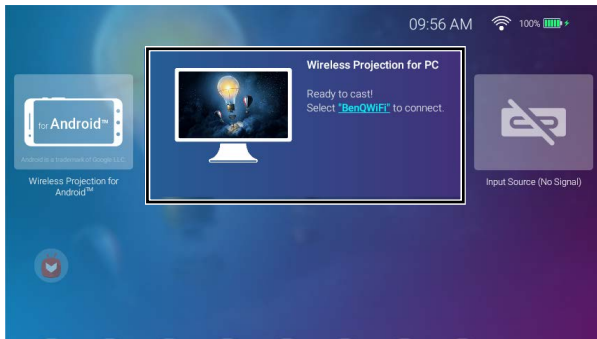

②


Refer to the **Wireless Projection for PC** screen for wireless or hotspot connection details. Using your PC or laptop, connect to the projector via screencasting.



Bluetooth Speaker Mode

①

Press the **Switch Key** to enable Bluetooth Speaker mode on the projector.

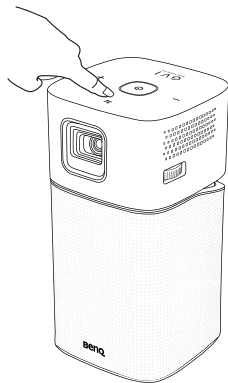

②


Using your device, connect to the GVI via Bluetooth.



Wireless AP


①

Select **Hotspot** in the settings menu and press **OK**.

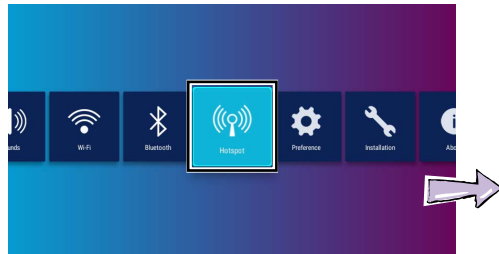


②

(Optional) Create a Hotspot name and press **OK**.
(Optional) Create a Hotspot password and press **OK**.

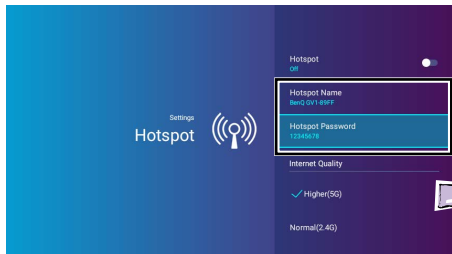

③

Press **OK** to enable the **Hotspot** switch.

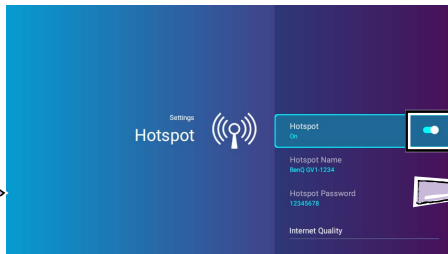

④

Using your device, connect to the Hotspot name and enter the Hotspot password.




BenQ Smart Control (remote control app)

Installing the **BenQ Smart Control** app


①

Make sure your smart-phone is connected to the Internet.




②

Select **BenQ Smart Control** in the **Settings** menu of the **BenQ Launcher** home screen and then press **OK**.

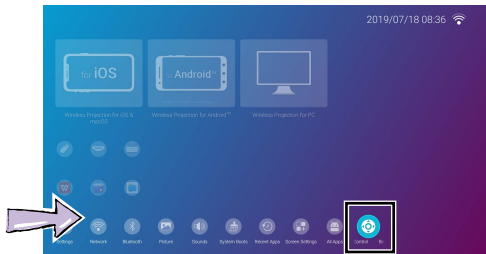

③


Scan the QR code shown on the projector with your smartphone to download and install **BenQ Smart Control**.

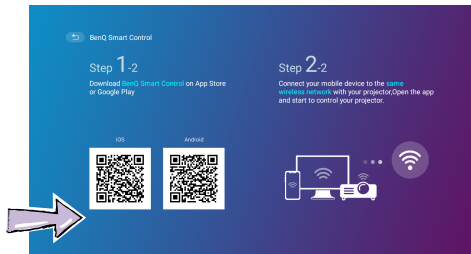

Using the **BenQ Smart Control** app

①

Connect your smartphone to the same wireless network as your projector.




②

Open the **BenQ Smart Control** app on your smartphone.



③


Select the projector from the **BenQ Smart Control** device list.




4

Choose one of the following methods to use **BenQ Smart Control**:

Tap **DPad** to use the pre-configured buttons in the app to control your projector.

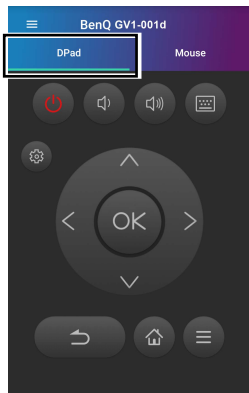

Tap **Mouse** to use touch gestures on your smartphone to control the cursor on the projector similar to a mouse.

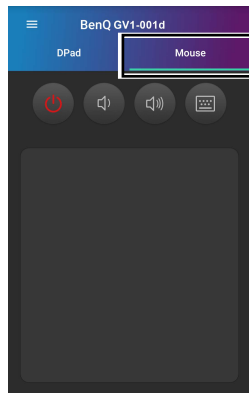

Specifications

Projection System		DLP
Native Resolution		WVGA (854 x 480)
Brightness		200AL
Contrast Ratio (FOFO)		100,000:1
Lens		F=1.5, f=5.53mm
Throw Ratio		1.3 (35" @ 1M)
SoC		Qualcomm Snapdragon 210 MSM8909
OS		Android 7.1.2
RAM		1G LPDDR3
Flash		8G EMMC
WLAN		IEEE 802.11 a/b/g/n, 2.4G/5G
2G	A SKU	Ch1-Ch11
	E SKU	
5G	A SKU	Band1: Ch36, Ch40, Ch44, Ch48
		Band4: Ch149, Ch153, Ch157, Ch161, Ch165
	E SKU	Band1: Ch36, Ch40, Ch44, Ch48
Interface		DC in x1 USB-C™ (DP Alt mode, Data) x1

Dimensions (WxHxD)	80 x 155 x 80 mm
Weight	708 g
Working Temperature	0°C-40°C

Power	DC Supply	
	Frequency	AC 100 to 240V, 50/60 Hz 0.8A
	Power Rating	12.0V 2.0A 24.0W
	Battery Supply	
	Type	Lithium-ion Polymer
	Electrical Rating	7.4V 3000.0mAh 22.2W
	Battery Cycle Life	300 cycles
	Charging Time	3 hours from 0% to 100%
	Battery Life	3 hours in battery mode

Codec	Video	XVID(.avi) MPEG-4(3gp, mp4) H.263(3g2, .avi, .mkv, .webm, 3gp, mp4)
	Subtitle	N/A
	Audio	MP3, AAC
	Picture	JPG(.jpg, .jpeg), PNG(.png), BMP(.bmp)
	Document	.txt



<http://www.BenQ.com> > Projectors > GVI > Downloads / Support > User Manual

Scan the QR code with an appropriate mobile app to access the latest QSG in various languages.

Scannez le code QR avec une appli mobile appropriée pour accéder au dernier Guide de démarrage rapide en plusieurs langues.

Scannen Sie den QR-Code mit einer entsprechenden Mobil-App, um auf die aktuelle Kurzanleitung in verschiedenen Sprachen zuzugreifen.

Eseguire la scansione del codice QR con un'applicazione mobile adeguata per accedere alla guida rapida più recente in varie lingue.

Escanee el código QR con una aplicación para móviles adecuada para acceder a la Guía de inicio rápido más reciente en distintos idiomas.

Digitalize o código QR com uma aplicação móvel adequada para aceder ao Guia de Iniciação Rápida mais recente em diferentes idiomas.

Scan de QR-code met een geschikte mobiele app voor de nieuwste versie van de Snelgids in diverse talen.

Läs av QR-koden med lämplig mobilapp för åtkomst till den senaste snabbstartsguiden på flera språk.

Pro přístup k nejnovější stručné příručce v různých jazycích naskenuj přes příslušnou mobilní aplikaci QR kód.

Zeskanuj kod QR przy użyciu odpowiedniej aplikacji mobilnej, aby uzyskać najnowszą instrukcję szybkiego uruchomienia w różnych językach.

Отсканируйте этот QR-код с помощью подходящего мобильного приложения для доступа к самой новой версии Краткого руководства на разных языках.

対応するモバイルアプリでQRコードをスキャンして、最新のQSGにアクセスしてください（多言語対応）。

적절한 모바일 앱을 사용하여 QR 코드를 스캔하고 다양한 언어로 된 최신 QSG에 액세스합니다.

用适当的移动应用程序扫描二维码可访问不同语言的最新QSG。

使用適當的行動應用程式掃描QR碼，存取不同語言版本的最新QSG。

Çeşitli dillerdeki en son QSG'ye erişmek için uygun mobil uygulama ile QR kodunu tarayın.

สแกนคิวอาร์โค้ดด้วยแอปพลิเคชันบนอุปกรณ์ที่เคลื่อนที่ เพื่อเข้าถึง QSG ล่าสุดในภาษาต่างๆ

امسح رمز QR من خلال تطبيق محمول مناسب للوصول إلى أحدث QSG بلغات مختلفة.

NCC

依低功率電波輻射性電機管理辦法要求

第12條經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第14條低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

高增益指向性天線只得應用於固定式點對點系統。

BSMI 限用物質含有情況標示聲明

設備名稱	數位投影機					
單元	限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ⁶⁺)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
光機組件	○	○	○	○	○	○
電源元件	-	○	○	○	○	○
線材	○	○	○	○	○	○
電路板	-	○	○	○	○	○
塑膠組件	○	○	○	○	○	○
金屬件	-	○	○	○	○	○
風扇	○	○	○	○	○	○
包裝材料	○	○	○	○	○	○
配件	-	○	○	○	○	○
備考1： "○" 係指該項限用物質之百分比含量未超出百分比含量基準值。						
備考2： "-" 係指該項限用物質為排除項目。						

<Memo>

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BenQ Corporation is under license.

Android is a trademark of Google LLC.



BenQ.com

© 2020 BenQ Corporation.
All rights reserved. Rights of modification reserved.

P/N: 4JJKL01.002 02/13/2020