

Colour laser multifunction product



# Lexmark X792 Family

Business productivity with robust colour performance



X792de



Colour



Solutions



Duplex  
printing



Up to  
47 ppm



Network



Copy



Scan



Fax



Security



Eco-friendly

### Robust colour printing

Designed for busy colour printing environments, the Lexmark X792 Family delivers vibrant, professional quality output that is consistent from the first page to the last.

- ▶ Lexmark Extra High Yield Print Cartridge available, offering yields of up to 20,000\* pages
- ▶ Print and copy in duplex at speeds as fast as 47 ppm in both black and colour
- ▶ Match brand sensitive corporate colours on marketing collateral and within Microsoft Office with Lexmark Named Colour Replacement and PANTONE calibration
- ▶ Lexmark Colour Care Technology to manage colour usage and control costs
- ▶ Instant warm-up fuser to help reduce energy consumption and improve time to first page

### Business productivity

The Lexmark X792 Family combines exceptional multifunction performance with time-saving applications designed to make you more productive. These MFPs can deliver the performance of much larger copiers, but with a smaller footprint and a more affordable price.

- ▶ Duplex scanning to scan both sides of your documents in one pass
- ▶ Advanced copy functions let you interrupt long print runs to make a quick copy, and proof the first copy set before completing your copy job
- ▶ Scan to multiple destinations, including scan to email, scan to FTP, scan to fax, scan to network, and more
- ▶ Preloaded applications to drive greater efficiency, and Lexmark Embedded Solutions Framework to further extend the capabilities of the device

### Flexibility

Select from a number of expandability options and finishing features you would expect from more expensive products.

- ▶ Ultra-reliable paper feeding to support diverse media, including card stock, labels, UV-resistant outdoor media, banner media and more
- ▶ Robust output options, including a five-bin assignable mailbox, an offset stacker, a staple finisher, and a staple with hole punch finisher
- ▶ Input capacity expandable up to 2,650 sheets with a high-capacity feeder or extra drawers
- ▶ Connectivity and application solution cards allow integration into most IT environments

### Easy and intuitive

The Lexmark X792 Family is designed for easy operation and maintenance.

- ▶ Extra large, easy to navigate 25 cm (10-inch) class colour touch screen provides audible and tactile feedback to make completing tasks intuitive
- ▶ Print and scan preview features help you select documents or specific pages within a document
- ▶ Directional lights on the device provide visual cues to guide you through tasks and maintenance operations
- ▶ Eco-friendly settings such as the Sleep button and Hibernate Mode
- ▶ Available device fleet management software

\* Average continuous black or composite CMY declared cartridge yield in accordance with ISO/IEC 19798

### Make a lasting impression with award-winning colour

The documents you print define an important image—yours. That's why Lexmark's colour MFPs help businesses be more productive and stand out with vibrant colour. With the ability to print professional quality colour in-house, you can add instant impact and save costs by virtually eliminating the need to outsource print jobs. Lexmark also offers a host of colour-access and control tools to manage costs.

### The right touch

The Lexmark e-Task colour touch screen is a key access point to your printer. The extra large customisable 25 cm (10-inch) class interface gives you the ability to preview thumbnails of documents prior to printing, as well as change print jobs at the device. You can even view, select and print specific pages within a document directly from the touch screen. New interactive sensory features provide both tactile and audible feedback, helping to guide you through each operation, confirming a touch has registered and indicating an action is transpiring.

### Protecting your information

From the data traveling through your network to the pages being printed, Lexmark's innovative security controls give you peace of mind that your valuable corporate data is protected at every stage.

- ▶ Cutting-edge user authentication and authorisation controls, including LDAP, help protect your device and data
- ▶ Card reader option to add an extra layer of security
- ▶ Hard disk encryption protects sensitive data on the disk drive
- ▶ Automatic, scheduled or manual disk wiping
- ▶ IPSec, SNMPv3 and 802.1x network security supported
- ▶ Security-audit logging to help track and identify security risks

### True image always

Lexmark is dedicated to designing and manufacturing products that deliver exceptional quality and reliable performance. Maximise the return on your investment, extend the service life of your Lexmark printing equipment and make a lasting impression by always insisting on Lexmark Genuine Supplies, Service and Parts. Lexmark X792 Family colour laser printers are backed by a one-year limited warranty. For further protection against unexpected expenses or downtime, extended warranty offerings are available.



## Save time and money through solutions

Reduce unnecessary printing and simplify work processes through Lexmark solutions. The X792 Family features the Lexmark Embedded Solutions Framework (eSF), our platform that enables you to add a wide range of software applications directly onto the device. Solutions are designed with your productivity in mind, helping you streamline—or even eliminate—paper intensive business processes.

### Preloaded solutions\* on the X792 family:



#### Forms and Favorites

Eliminate waste and inefficiencies associated with preprinted forms. Store frequently printed forms, marketing materials or other documents online, then print them on demand.



#### Scan to Network

Scan a hardcopy document and route the image to one of 100 predefined personal or public shared network folders.



#### Change Language\*\*

Easily switch the language displayed on the touch screen—18 languages supported.

### Examples of solutions available through Lexmark authorised partners and dealers, or through a Lexmark Professional Services engagement:



#### Background and Idle Screen

Change the touch screen background to your corporate logo, a unique message, or select one of the four screens that are preloaded on the device.



#### Showroom

Display a customisable, scrolling slideshow on the colour touch screen to promote your business or products, or to communicate important messages to your customers or employees.



#### Card Copy

Save time and effort in copying identification cards, licenses and insurance cards by automatically scanning, enlarging and printing both sides of a two-sided card onto one side of a sheet of paper.

\*Additional solutions are available

\*\*Opt-in to Change Language during installation



**Intuitive colour touch screen**

The extra large 25 cm (10-inch) class colour touch screen allows you to operate your printer with ease and confidence through smart and intuitive navigation, easy access to workflow solutions and shortcuts, and the ability to preview your documents and print jobs at the device.



**Flexible output options**

Choose from four output options, including a five-bin mailbox, an offset stacker, a staple finisher, and a staple with hole punch finisher.



**Duplex automatic document feeder (DADF)**

Save time by scanning both sides of your document in one pass with robust colour-scanning capabilities and an input capacity of up to 75 pages.



**Direct USB**

The front USB port allows for convenient walk-up preview, printing and scanning, and is compatible with most printable image file formats.



**Lexmark solutions**

Reduce unnecessary printing and simplify work processes through solutions applications preloaded on your device. Choose additional Lexmark solutions to fit your unique workflow needs.



**Long-lasting toner**


The Lexmark Extra High Yield Print Cartridge delivers up to 20,000\* pages, reducing interventions, cartridge waste and cost.



**Eco-friendly features**

Easy-to-access features make it easy to print responsibly, including Eco-Mode to reduce paper and toner consumption, and the Sleep button and Hibernate Mode to help you save energy.

\*Average continuous black or composite CMY declared cartridge yield in accordance with ISO/IEC 19798.

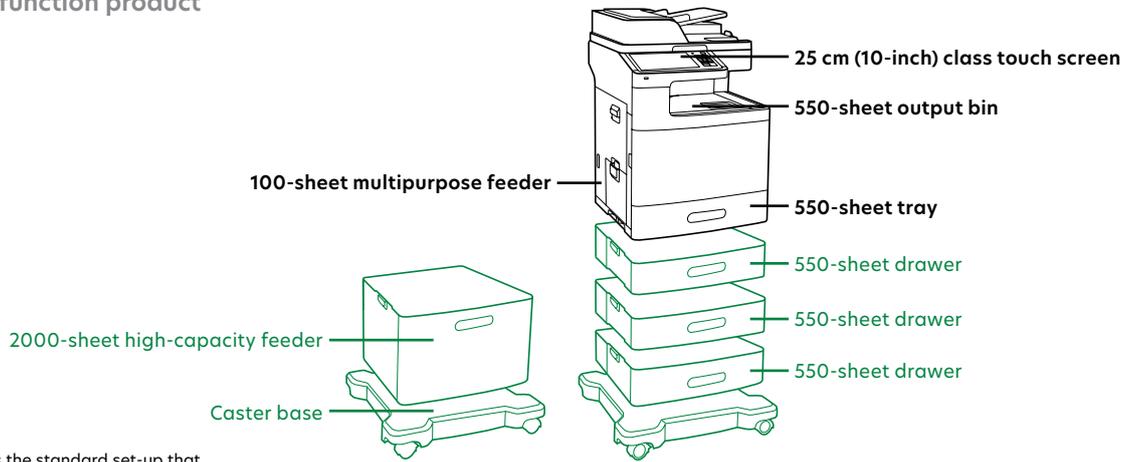

**Standard**

**Optional**

The line art features the standard set-up that can be different per model.

## X792 Series

### Part # Models

47B1063	Lexmark X792de
47B1067	Lexmark X792dte
47B1065	Lexmark X792dtfe
47B1184	Lexmark X792dtme
47B1183	Lexmark X792dtpe
47B1185	Lexmark X792dtse

### Part # Laser toner/print cartridge

X792X1KG	X792 Black Extra High Yield Return Programme Print Cartridge
X792X1CG	X792 Cyan Extra High Yield Return Programme Print Cartridge
X792X1MG	X792 Magenta Extra High Yield Return Programme Print Cartridge
X792X1YG	X792 Yellow Extra High Yield Return Programme Print Cartridge
C792A1KG	C792, X792 Black Return Programme Print Cartridge
C792A1CG	C792, X792 Cyan Return Programme Print Cartridge
C792A1MG	C792, X792 Magenta Return Programme Print Cartridge
C792A1YG	C792, X792 Yellow Return Programme Print Cartridge
X792X2KG	X792 Black Extra High Yield Print Cartridge
X792X2CG	X792 Cyan Extra High Yield Print Cartridge
X792X2MG	X792 Magenta Extra High Yield Print Cartridge
X792X2YG	X792 Yellow Extra High Yield Print Cartridge
C792X77G	C792, X792 Waste Toner Bottle
25A0013	Staple Cartridges (3 pack)

### Part # Paper handling

47B0110	C792, X792 550-sheet drawer
47B0111	C792, X792 2000-sheet high capacity feeder
47B1101	C792, X792 5-bin mailbox
47B1102	C792, X792 500-sheet offset stacker
47B1100	C792, X792 500-sheet staple finisher
47B1103	C792, X792 500-sheet staple, hole punch finisher
47B0112	C792, X792 Spacer
47B0118	X792 Banner media tray

### Part # Furniture

47B0114	C792, X792 Caster base
---------	------------------------

### Part # Memory options

1025041	256MB DDR2-DRAM
1025042	512MB DDR2-DRAM
1025043	1024MB DDR2-DRAM

14F0245	256MB Flash Card
30G0287	Arabic Font Card
30G0828	Japanese Font Card
30G0825	Korean Font Card
30G0826	Simplified Chinese Font Card
30G0827	Traditional Chinese Font Card

### Part # Application solutions

47B1111	X792 Card for IPDS
47B1110	X792 Forms and Bar Code Card
47B1112	X792 Card for PRESCRIBE Emulation
57X9000	Lexmark PrintCryption Card

### Part # Connectivity

27X0025	MarkNet N8250 802.11b/g/n Wireless Print Server
14F0037	MarkNet N8120 Gigabit Ethernet Print Server
14F0042	MarkNet N8130 Fiber Ethernet 100BaseFX, 10BaseFL Print Server
14T0220	MarkNet™ N7020e Gigabit Ethernet Print Server
1021294	USB Cable (2-meter)
14F0000	Parallel 1284-B Interface Card
1021231	Parallel Cable (10-foot)
14F0100	RS-232C Serial Interface Card

### Part # Extended warranties


2353776	X792 2-Years Total Onsite Service, Next Business Day
2353777	X792 3-Years Total Onsite Service, Next Business Day
2353778	X792 4-Years Total Onsite Service, Next Business Day
2353779	X792 5-Years Total Onsite Service, Next Business Day
2353780	X792 1-Year Onsite Service Renewal, Next Business Day

### Part # User replaceable parts


40X7103	C792, X792 Transfer module Maintenance Kit
40X7220	X792 ADF Maintenance Kit
40X7101	C792, X792 Fuser Maintenance Kit 220-240V
40X6275	C792, X792 High Capacity Feeder pick roll assembly

### Part # Service parts


40X6104	Pick Tire for Trays
40X7178	MPF Pick Tires and Wear Strip




Offset stacker



Staple finisher



5-bin mailbox



Staple punch finisher

## Colour laser multifunction product



Product specifications	Lexmark X792de	Lexmark X792dte	Lexmark X792dtfe
<b>Print</b>			
Display	Lexmark e-Task 25 cm (10-inch) class colour touch screen		
Print Speed: Up to	Black: 47 ppm / Colour: 47 ppm		
Time to First Page: As fast as	Black: 8 seconds / Colour: 8.5 seconds		
Print Resolution	Black: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi)		
Memory	Standard: 1024 MB / Maximum: 2048 MB		
Hard Disk	Included in configuration		
Recommended Monthly Page Volume <sup>3</sup>	2500 - 25000 pages		
Maximum Monthly Duty Cycle: Up to <sup>2</sup>	150000 pages per month		
<b>Copy</b>			
Copy Speed: Up to	Black: 47 cpm / Colour: 47 cpm		
Time to First Copy: as fast as	Black: 10 seconds / Colour: 11 seconds		
<b>Scan</b>			
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)		
A4/Ltr Simplex Scan Speed: Up to	Black: 47 / 49 sides per minute / Colour: 47 / 49 sides per minute		
<b>Fax</b>			
Modem Speed	33.6 Kbps		
<b>Supplies</b>			
Supplies Yield <sup>1</sup>	6,000-page (CMYK) Print Cartridges, 20,000-page (CMYK) Extra High Yield Print Cartridges		
Cartridge(s) Shipping with Product <sup>1</sup>	12,000-page Black and Colour (CMY) Starter Return Program Print Cartridges		
<b>Paper Handling</b>			
Paper Handling Standard	500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray	500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray, 2 x 550-Sheet Drawers	500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray, 2 x 550-Sheet Drawers, 500-Sheet Staple Finisher
Paper Handling Optional	5-Bin Mailbox, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder, 500-Sheet Offset Stacker, 500-Sheet Staple Finisher, 500-Sheet Staple Punch Finisher	5-Bin Mailbox, 550-Sheet Drawer, Banner Media Tray, 500-Sheet Offset Stacker, 500-Sheet Staple Finisher, 500-Sheet Staple Punch Finisher	550-Sheet Drawer
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 2650 pages 75 gsm bond	Standard: 1750 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 500 pages 75 gsm bond / Maximum: 1000 pages 75 gsm bond		Standard: 1000 pages 75 gsm bond / Maximum: 1000 pages 75 gsm bond
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Glossy paper, Integrated Labels, Paper Labels, Plain Paper, Polyester Labels, Transparencies, Vinyl Labels, Refer to the Card Stock & Label Guide., Outdoor Media, Banner Paper		Card Stock, Dual Web Labels, Envelopes, Glossy paper, Integrated Labels, Paper Labels, Plain Paper, Polyester Labels, Transparencies, Vinyl Labels, Refer to the Card Stock & Label Guide., Outdoor Media
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal		
<b>General Information</b>			
Standard Connectivity	USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)		
Optional Network Ports / Optional Local Ports	External MarkNet™ N7020e Gigabit Ethernet, Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless / RS-232C Serial Interface Card, Parallel 1284-B Interface Card		
Noise Level: Operating	Print: 52 dBA / Copy: 53 dBA / Scan: 54 dBA		
Specified Operating Environment	Temperature: 16 to 32°C, Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet)		
Product Guarantee	1-Year Onsite Service, Next Business Day		
Size (mm - H x W x D) / Weight	825.5 x 559 x 508 mm / 73.2 kg	1204 x 611 x 657 mm / 112 kg	1204 x 1055 x 657 mm / 128.4 kg

<sup>1</sup>Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. <sup>2</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>3</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

**This is a Class A device according to the FCC Rules and EN 55022/EN 55032 emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.**

Colour laser multifunction product



	Lexmark X792dtpe	Lexmark X792dtme	Lexmark X792dtse
<b>Print</b>			
Display	Lexmark e-Task 25 cm (10-inch) class colour touch screen		
Print Speed: Up to	Black: 47 ppm / Colour: 47 ppm		
Time to First Page: As fast as	Black: 8 seconds / Colour: 8.5 seconds		
Print Resolution	Black: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi)		
Memory	Standard: 1024 MB / Maximum: 2048 MB		
Hard Disk	Included in configuration		
Recommended Monthly Page Volume <sup>3</sup>	2500 - 25000 pages		
Maximum Monthly Duty Cycle: Up to <sup>2</sup>	150000 pages per month		
<b>Copy</b>			
Copy Speed: Up to	Black: 47 cpm / Colour: 47 cpm		
Time to First Copy: as fast as	Black: 10 seconds / Colour: 11 seconds		
<b>Scan</b>			
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)		
A4/Ltr Simplex Scan Speed: Up to	Black: 47 / 49 sides per minute / Colour: 47 / 49 sides per minute		
<b>Fax</b>			
Modem Speed	33.6 Kbps		
<b>Supplies</b>			
Supplies Yield <sup>1</sup>	6,000-page (CMYK) Print Cartridges, 20,000-page (CMYK) Extra High Yield Print Cartridges		
Cartridge(s) Shipping with Product <sup>1</sup>	12,000-page Black and Colour (CMY) Starter Return Program Print Cartridges		
<b>Paper Handling</b>			
Paper Handling Standard	500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray, 2 x 550-Sheet Drawers, 500-Sheet Staple Punch Finisher	500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray, 2 x 550-Sheet Drawers, 5-Bin Mailbox	500-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray, 2 x 550-Sheet Drawers, 500-Sheet Offset Stacker
Paper Handling Optional	550-Sheet Drawer		
Paper Input Capacity: Up to	Standard: 1750 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond		
Paper Output Capacity: Up to	Standard: 1000 pages 75 gsm bond / Maximum: 1000 pages 75 gsm bond		
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Glossy paper, Integrated Labels, Paper Labels, Plain Paper, Polyester Labels, Transparencies, Vinyl Labels, Refer to the Card Stock & Label Guide., Outdoor Media		
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal		
<b>General Information</b>			
Standard Connectivity	USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)		
Optional Network Ports / Optional Local Ports	External MarkNet™ N7020e Gigabit Ethernet, Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless / RS-232C Serial Interface Card, Parallel 1284-B Interface Card		
Noise Level: Operating	Print: 52 dBA / Copy: 53 dBA / Scan: 54 dBA		
Specified Operating Environment	Temperature: 16 to 32°C, Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet)		
Product Guarantee	1-Year Onsite Service, Next Business Day		
Size (mm - H x W x D) / Weight	1204 x 1055 x 657 mm / 129.3 kg	1204 x 1055 x 657 mm / 126.6 kg	1204 x 1055 x 657 mm / 127.5 kg

<sup>1</sup>Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. <sup>2</sup>“Maximum Monthly Duty Cycle” is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPS. <sup>3</sup>“Recommended Monthly Page Volume” is a range of pages that helps customers evaluate Lexmark’s product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

This is a Class A device according to the FCC Rules and EN 55022/EN 55032 emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.

© 2015 Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners. ENERGY STAR® is a U.S. registered mark.

AirPrint and the AirPrint logo are trademarks of Apple Inc.